



www.lmindustrial.com.ar
info@lmindustrial.com.ar
11 3180 9499

ALRE

REFRIGERACIÓN Y CALEFACCIÓN

Damper Actuator S6061 Series

- Standard • Fast Running

S6061-02 Standard Damper Actuator



The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 2Nm
- Nominal voltage: AC/DC 24V ; AC 230V
- Control: 2/3 point

Order Code

S6061- 02 D X /X

Voltage (AC/DC 24V or AC 230V)

Auxiliary Switch F: with one; N: None

Control :D (On/off)

Torque:2Nm

Specifications

Items	S6061-02DN(F)/24V	S6061-02DN(F)/230V
Torque (Nm)	2Nm	
Stopping Force(Nm)	>2Nm	
Damper Size(m ²)	0.5m ²	
Running Time(sec)	35-45s	
Nominal voltage(V)	AC/DC 24V 50/60Hz	AC 230V 50/60Hz
Nominal voltage Range	AC/DC 21.6-26.4V	AC 85-265V
Power consumption	2W (in operation)	1.5W(in operation)
	0.5W(Holding)	0.8W(Holding)
Power consumption of wiring sizing (VA)	7VA	
Weight (Kg)	0.6Kg	
Control Signal	2/3 point	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None or One	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	III	II
Protection Level	IP54	
Ambient temperature	-20~+50℃	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70℃	
Shaft Diameter	 6-16mm	
Cable	1m	
Certificate	CE & EAC	

S6061-02 Standard Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor : 2Nm
- Nominal voltage: AC/DC 24V ; AC 230V
- Control : 0(2)-10V

Order Code

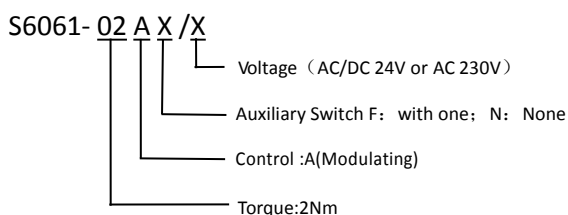

Specifications

Items	S6061-02AN(F)/24V	S6061-02AN(F)/230V
Torque (Nm)	2Nm	
Stopping Force(Nm)	>2Nm	
Damper Size(m ²)	0.5m ²	
Running Time(sec)	45-55s	
Nominal voltage(V)	AC/DC 24V 50/60Hz	AC 230V 50/60Hz
Nominal voltage Range	AC/DC 21.6-26.4V	AC 85-265V
Power consumption	2.5W(in operation)	2.5W(in operation)
	0.5W(Holding)	0.8W(Holding)
Power consumption of wiring sizing (VA)	7VA	
Weight (Kg)	0.6Kg	
Control Signal	2-10V	0-10V
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None or One	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	III	II
Protection Level	IP54	
Ambient temperature	-20~+50℃	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70℃	
Shaft Diameter	 6-16mm	
Cable	1m	
Certificate	CE & EAC	

S6061-04 Standard Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 4Nm
- Nominal voltage: AC/DC 24V ; AC 230V
- Control: 0-10V or 4-20mA

Order Code

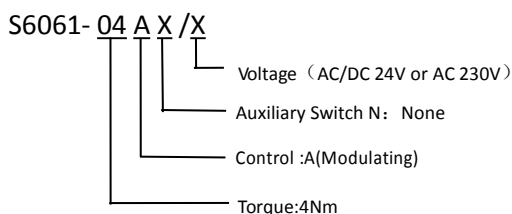

Specifications:

Items	S6061-04AN/24V	S6061-04AN/230V	S6061-04AN/I/24V
Torque (Nm)	4Nm		
Stopping Force(Nm)	>4Nm		
Damper Size(m ²)	1m ²		
Running Time(sec)	30~40s		
Nominal voltage(V)	AC/DC 24V	AC 230V 50/60Hz	AC/DC 24V 50/60Hz
Nominal voltage Range	AC/DC 21.6-26.4V	AC 85-265V	AC/DC 21.6-26.4V
Power consumption	2.5W(in operation)		
	0.85W(Holding)		
Power consumption of wiring sizing (VA)	7VA		
Weight (Kg)	1.0Kg		
Control Signal	0~10V		4~20mA
Angle of rotation	0~90° (Max 93°)		
Direction of rotation	L/R switch		
Auxiliary switch	None		
Life cycle	≥70000		
Noise level	45dB		
Protection Class	III	II	III
Protection Level	IP44,(IP54 with cable)		
Ambient temperature	-20~+50℃		
Ambient Humidity	5~95%RH		
Storage temperature	-40~+70℃		
Shaft Diameter	 10-16mm		
Cable	Without cable,or customized(S6061-04AN/230V with 1 meter cable)		
Certificate	CE & UL & EAC		

S6061-(08~32)Standard Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 8Nm;16Nm;24Nm;32Nm
- Nominal voltage: AC/DC 24V
- Control: 0(2)-10V or 0(4)-20mA

Order Code

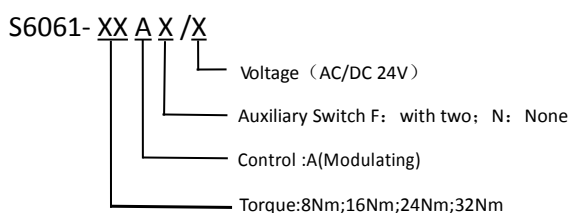

Specifications

Items	S6061-08AN(F) /24V	S6061-16AN(F) /24V	S6061-24AN(F) /24V	S6061-32AN(F) /24V
Torque (Nm)	8Nm	16Nm	24Nm	32Nm
Stopping Force(Nm)	> 8Nm	> 16Nm	> 24Nm	> 32Nm
Damper Size(m ²)	2m ²	4m ²	6m ²	6m ²
Running Time(sec)	30~40s	72~88s	117~143s	190~210s
Nominal voltage(V)	AC/DC 24V 50/60Hz			
Nominal voltage Range	AC/DC 21.6-26.4V			
Power consumption	4.8W(in operation)			2.5W(in operation)
	1.0W(Holding)			0.3W(Holding)
Power consumption of wiring sizing (VA)	10VA			
Weight(Kg)	1.1Kg			
Control Signal	0(2)-10V or 0(4)-20mA			
Angle of rotation	0~90° (Max 93°)			
Direction of rotation	L/R switch			
Auxiliary switch	None or Two			
Life cycle	≥70000			
Noise level	45dB			
Protection Class	III			
Protection Level	IP44,(IP54 with cable)			
Ambient temperature	-20~+50℃			
Ambient Humidity	5~95%RH			
Storage temperature	-40~+70℃			
Shaft Diameter	 12.6-20mm			
Cable	Without cable,or customized			
Certificate	CE & UL & EAC			

S6061-(08、16)K Fast Running Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor : 8Nm;16Nm
- Nominal voltage : AC/DC 24V
- Control : 0(2)-10V or 0(4)-20mA

Order Code

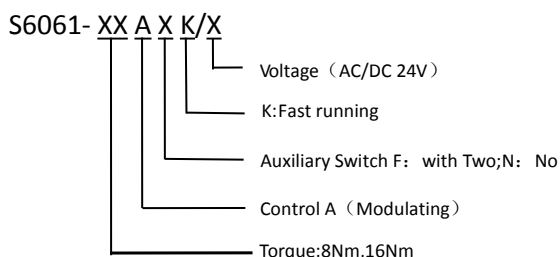

Specifications

Items	S6061-08ANK	S6061-16ANK	S6061-08AFK	S6061-16AFK
Torque (Nm)	8Nm	16Nm	8Nm	16Nm
Stopping Force(Nm)	> 8Nm	> 12Nm	> 8Nm	> 12Nm
Damper Size(m²)	2m²	4m²	2m²	4m²
Running Time(sec)	8s	16s	8s	16s
Nominal voltage(V)	AC/DC 24V 50/60Hz			
Nominal voltage Range	AC/DC 21.6-26.4V			
Power consumption	8.5W（24V）(in operation)			
	0.7W（24V）(Holding)			
Power consumption of wiring sizing (VA)	25VA			
Weight(Kg)	1.1Kg			
Control Signal	0(2)-10V or 0(4)-20mA			
Angle of rotation	0~90°（Max 93°）			
Direction of rotation	L/R switch			
Auxiliary switch	None		Two	
Life cycle	≥70000			
Noise level	55dB			
Protection Class	III			
Protection Level	IP44,(IP54 with cable)			
Ambient temperature	-20~+50℃			
Ambient Humidity	5~95%RH			
Storage temperature	-40~+70℃			
Shaft Diameter	 12.6-20mm			
Cable	Without cable,or customized			