



www.lmindustrial.com.ar
info@lmindustrial.com.ar
11 3180 9499

ALRE

REFRIGERACIÓN Y CALEFACCIÓN

Damper Actuator S8081 Series

S8081 series 02/05 Standard Damper Actuator



The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 2Nm, 5Nm
- Nominal voltage: AC/DC 24V;AC 230V
- Control: 2/3 point

Order Code

S8081- XX D X /X

Voltage (AC/DC 24V or AC 230V)

Auxiliary Switch F: with one;N: None

Control D (On/off)

Torque: 2Nm、5Nm

S8081-02/05D Specifications

Items	S8081-02DN(F)	S8081-05DN(F)
Torque (Nm)	2Nm	5Nm
Stopping Force(Nm)	> 2Nm	> 5Nm
Damper Size(m ²)	0.5m ²	1m ²
Running Time(sec)	35s	45s
Nominal voltage(V)	AC/DC 24V;AC 230V 50/60Hz	
Nominal voltage Range	AC/DC 19.2-28.8V ;AC 85-265V	
Power consumption	1.5W (in operation)	
	0.7W (Holding)	
Power consumption of wiring sizing (VA)	5VA	
Weight(Kg)	0.5Kg	
Control Signal	2/3 point	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None or One	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	II /III	
Protection Level	IP54	
Ambient temperature	-20~+50℃	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70℃	
Shaft Diameter	 8-18mm	
Cable	1m	
Certificate	CE & UL & EAC	

S8081 series 02/05 Standard Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 2Nm, 5Nm
- Nominal voltage: AC/DC 24V
- Control: 0(2)-10V or 0(4)-20mA

Order Code

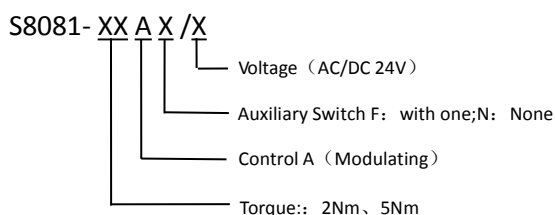

S8081-02/05A Specifications

Items	S8081-02AN	S8081-05AN
Torque (Nm)	2Nm	5Nm
Stopping Force(Nm)	> 2Nm	> 5Nm
Damper Size(m ²)	0.5m ²	1m ²
Running Time(sec)	35s	45s
Nominal voltage(V)	AC/DC 24V 50/60Hz	
Nominal voltage Range	AC/DC 19.2-28.8V;	
Power consumption	1.5W (in operation)	
	0.7W (Holding)	
Power consumption of wiring sizing (VA)	5VA	
Weight(Kg)	0.5Kg	
Control Signal	0(2)-10V or 0(4)-20mA	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	III	
Protection Level	IP54	
Ambient temperature	-20~+50℃	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70℃	
Shaft Diameter	 8-18mm	
Cable	1m	
Certificate	CE & UL & EAC	

S8081 series 10/20 Standard Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 10Nm, 20Nm
- Nominal voltage: AC/DC 24V; AC 230V
- Control: 2/3 point

Order Code

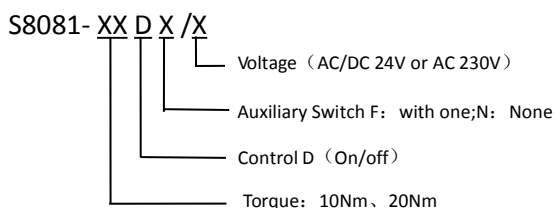

S8081-10/20D Specifications

Items	S8081-10DN(F)	S8081-20DN(F)
Torque (Nm)	10Nm	20Nm
Stopping Force(Nm)	> 10Nm	> 20Nm
Damper Size(m ²)	2m ²	4m ²
Running Time(sec)	60s	75s
Nominal voltage(V)	AC/DC 24V; AC 230V 50/60Hz	
Nominal voltage Range	AC/DC 19.2-28.8V ; AC 85-265V	
Power consumption	2.5W (in operation)	
	0.7W (Holding)	
Power consumption of wiring sizing (VA)	7VA	
Weight(Kg)	0.9Kg	
Control Signal	2/3 point	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None or One	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	II /III	
Protection Level	IP54	
Ambient temperature	-20~+50°C	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70°C	
Shaft Diameter	 12-26.7mm	
Cable	1m	
Certificate	CE & UL & EAC	

S8081 series 10/20 Standard Damper Actuator




The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 10Nm, 20Nm
- Nominal voltage: AC/DC 24V
- Control: 0(2)-10V or 0(4)-20mA

Order Code

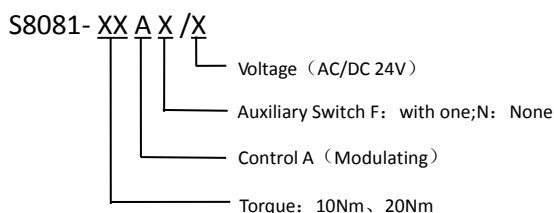

S8081-10/20A Specifications

Items	S8081-10AN	S8081-20AN
Torque (Nm)	10Nm	20Nm
Stopping Force(Nm)	> 10Nm	> 20Nm
Damper Size(m ²)	2m ²	4m ²
Running Time(sec)	60s	75s
Nominal voltage(V)	AC/DC 24V 50/60Hz	
Nominal voltage Range	AC/DC 19.2-28.8V;	
Power consumption	2.5W (in operation)	
	0.7W (Holding)	
Power consumption of wiring sizing (VA)	7VA	
Weight(Kg)	0.9Kg	
Control Signal	0(2)-10V or 0(4)-20mA	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	III	
Protection Level	IP54	
Ambient temperature	-20~+50°C	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70°C	
Shaft Diameter	 12-26.7mm	
Cable	1m	
Certificate	CE & UL & EAC	

S8081 series 30/40 Standard Damper Actuator



The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 30Nm, 40Nm
- Nominal voltage: AC/DC 24V ;AC 230V
- Control: 2/3 point

Order Code

S8081- XX D X /X

voltage (AC/DC 24V or AC 230V)

Auxiliary Switch F: with one;N: None

Control D (On/off)

Torque: 30Nm、40Nm

S8081-30/40D Specifications

Items	S8081-30DN(F)	S8081-40DN(F)
Torque (Nm)	30Nm	40Nm
Stopping Force(Nm)	> 30Nm	> 40Nm
Damper Size(m ²)	6m ²	8m ²
Running Time(sec)	75s	100s
Nominal voltage(V)	AC/DC 24V;AC 230V 50/60Hz	
Nominal voltage Range	AC/DC 19.2-28.8V;AC 85-265V	
Power consumption	5W (in operation)	
	0.7W (Holding)	
Power consumption of wiring sizing (VA)	7VA	
Weight(Kg)	1.4Kg	
Control Signal	2/3 point	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None or One	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	II /III	
Protection Level	IP54	
Ambient temperature	-20~+50°C	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70°C	
Shaft Diameter	 12-26.7mm	
Cable	1m	
Certificate	CE & UL & EAC	

S8081 series 30/40 Standard Damper Actuator



The damper actuator specially designed for the air dampers of the HVAC Systems

Product Features

- Torque motor: 30Nm, 40Nm
- Nominal voltage: AC/DC 24V
- Control: 0(2)-10V or 0(4)-20mA

Order Code

S8081- XX A X /X

voltage (AC/DC 24V)

Auxiliary Switch N: None

Control A (Modulating)

Torque: 30Nm、40Nm

S8081-30/40A Specification

Items	S8081-30AN	S8081-40AN
Torque (Nm)	30Nm	40Nm
Stopping Force(Nm)	> 30Nm	> 40Nm
Damper Size(m ²)	6m ²	8m ²
Running Time(sec)	75s	100s
Nominal voltage(V)	AC/DC 24V 50/60Hz	
Nominal voltage Range	AC/DC 19.2-28.8V	
Power consumption	5W	
	0.7W	
Power consumption of wiring sizing (VA)	7VA	
Weight(Kg)	1.4Kg	
Control Signal	0(2)-10V or 0(4)-20mA	
Angle of rotation	0~90° (Max 93°)	
Direction of rotation	L/R switch	
Auxiliary switch	None	
Life cycle	≥70000	
Noise level	45dB	
Protection Class	III	
Protection Level	IP54	
Ambient temperature	-20~+50℃	
Ambient Humidity	5~95%RH	
Storage temperature	-40~+70℃	
Shaft Diameter	 12-26.7mm	
Cable	1m	
Certificate	CE & UL & EAC	