

SOLENOID VALVE(3/2 WAY DIRECT ACTING)

3V1 SERIES



Specification

Model	3V1-01
Fluid	Air (to be filtered by 40 μ filter element)
Acting	Direct acting, normally closed
Port size	1/8"
Valve type	3 port 2 position
Temperature	-5~60°C (23~140°F)
Orifice size	1.2mm
Lubrication	Not required
Operating pressure	0~8.0 bar (0~0.8MPa)(0~114Psi)
Power consumption	AC220V: 2.0VA, AC110V: 2.5VA AC24V:3.5VA, DC24V: 3.0W, DC12V:2.5W
Protection	IP65 (DIN40050)
Connection	DIN Terminal
Material of body	Aluminum alloy
Max. frequency	10 cycle/sec
Insulation	F class
Voltage range	-15% ~ +10%
Min.activate time	0.05 sec


Symbol




Ordering code

<u>3V</u>	<u>1</u>	<u>01</u>	<u>AC110V</u>
Model	Code	Port size	Voltage
3V: 3 port 2 position solenoid valve	1: 1 Series	01: 1/8"	DC12V DC24V AC24V 50Hz AC110V 50Hz AC220V 50Hz

Flow chart

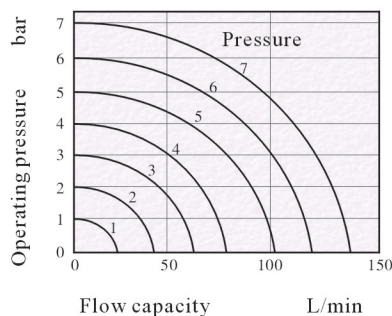


Inner structure



NO.	Item
1	Connector
2	Gasket
3	Coil nut
4	Coil
5	Armature
6	O-ring
7	Return spring
8	Body

Dimensions

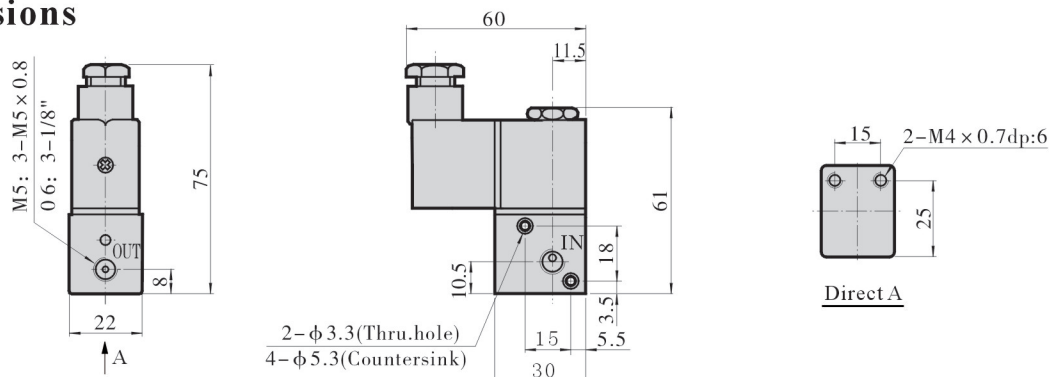

SOLENOID VALVE(3/2 WAY)

3V1 SERIES

■ Series connection

Dimensions

