

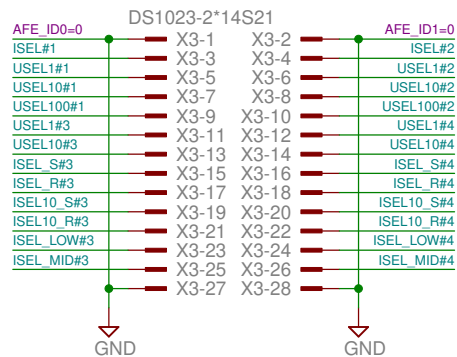


Voltage mode: ± 2.4 V, ± 48 V, ± 240 V
Current mode: ± 48 mA (gain x1)

AFE connectors

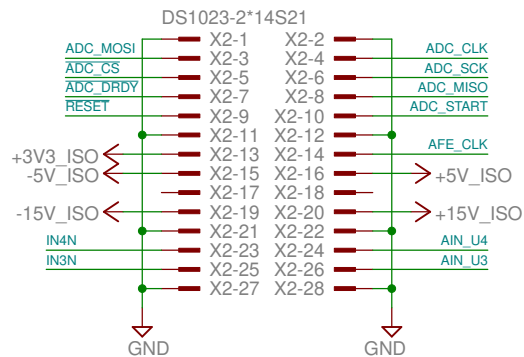

Dual coil latching relays driver

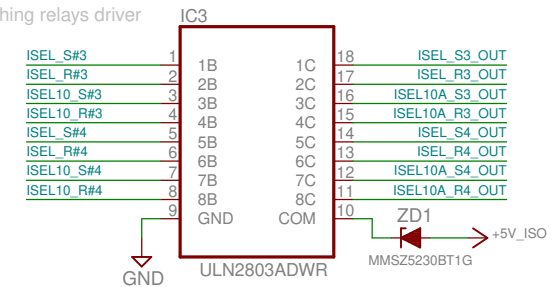

AFE channel #1 (High voltage)

TITLE: EEZ DIB AFE1 r1B3


Document Number:

REV:

Date: 22.1.2021. 17:00

Sheet: 1/5



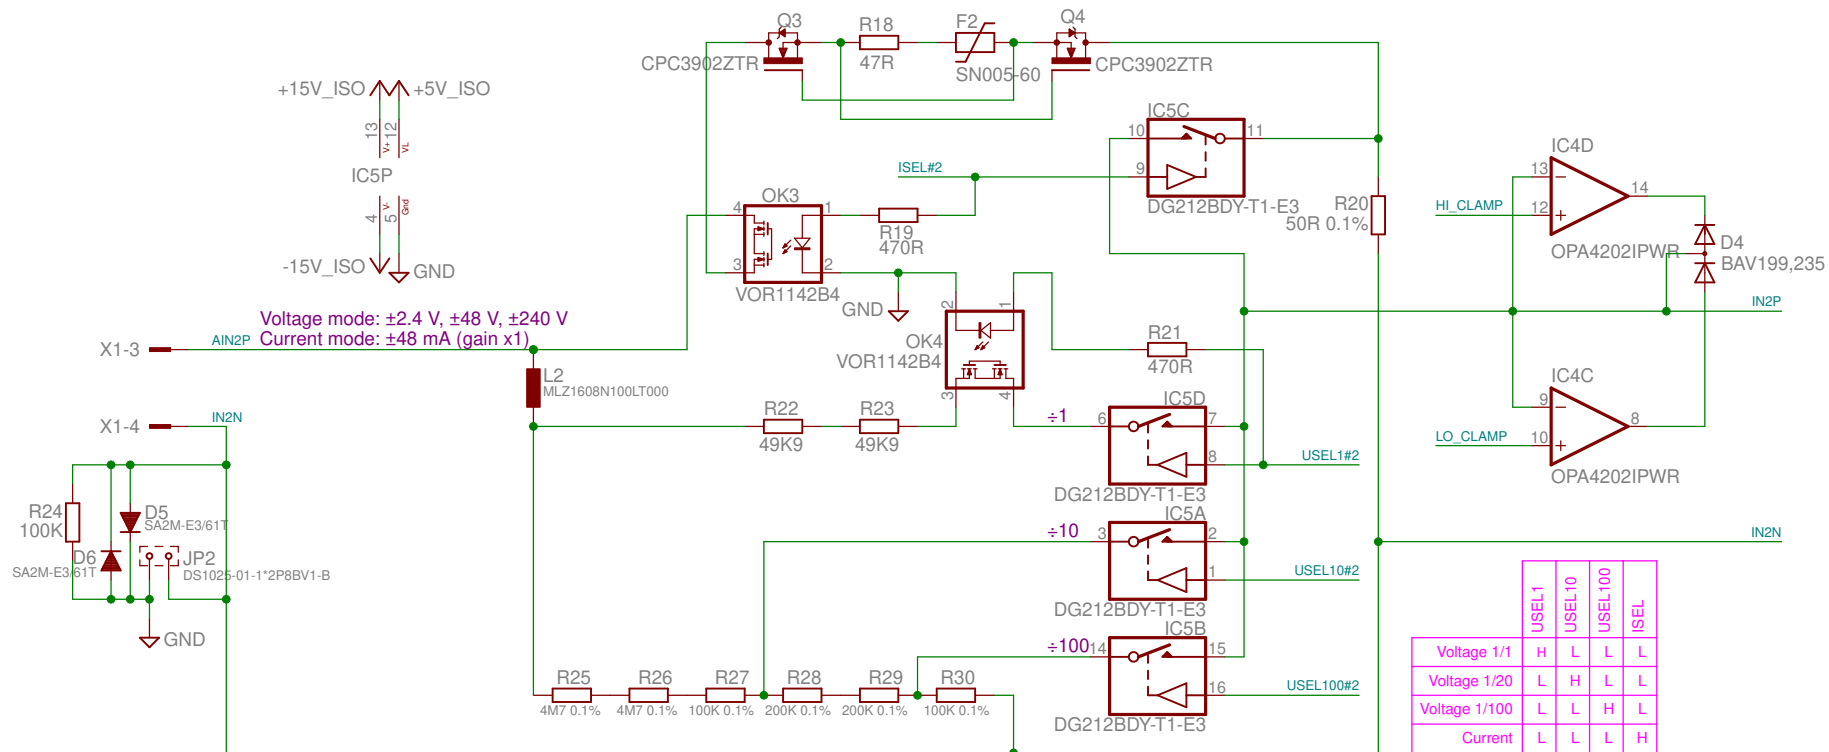

AFE channel #2 (High voltage)

TITLE: EEZ DIB AFE1 r1B3


Document Number:

REV:

Date: 22.1.2021. 17:00

Sheet: 2/5

Voltage mode: $\pm 2.4\text{ V}$, $\pm 12\text{ V}$
 Current mode: $\pm 48\text{ mA}$ (gain x1), $\pm 1.2\text{ A}$ (gain x2), $\pm 10\text{ A}$ (gain x12)

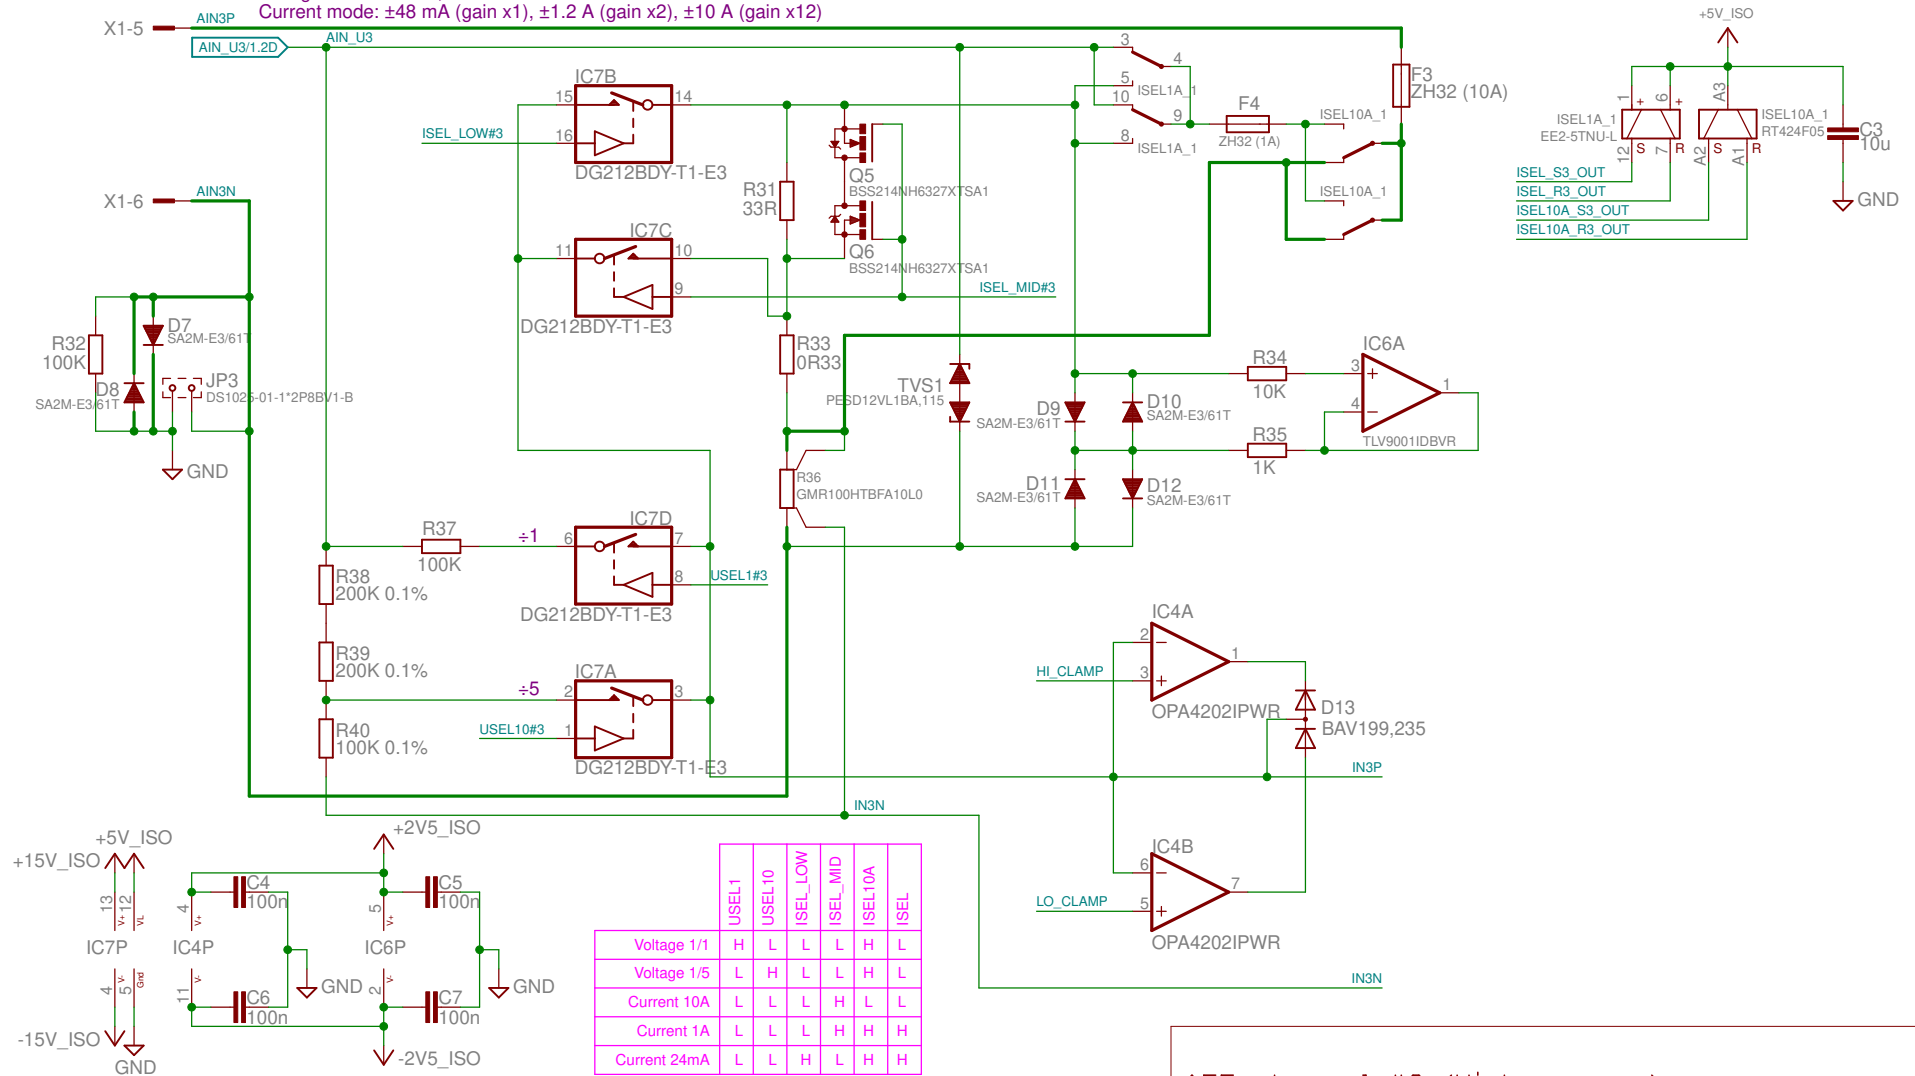

| | USEL1 | USEL10 | ISEL_LOW | ISEL_MID | ISEL10A | ISEL |
|--------------|-------|--------|----------|----------|---------|------|
| Voltage 1/1 | H | L | L | L | H | L |
| Voltage 1/5 | L | H | L | L | H | L |
| Current 10A | L | L | L | H | L | L |
| Current 1A | L | L | L | H | H | H |
| Current 24mA | L | L | H | L | H | H |

AFE channel #3 (High current)

TITLE: EEZ DIB AFE1 r1B3

Document Number:

REV:

Date: 22.1.2021. 17:00

Sheet: 3/5

