
File: Isolated_Ch#1,_Ch#2.kicad_sch

File: AFE_Ch#3_(hi-voltage).kicad_sch

File: AFE_Ch#4_(Hi-current).kicad_sch

File: Voltage%2fcurent_ADC.kicad_sch

Power consumption (max):	
AMC3330QDWER	155 mW
AMC3301DWER	151 mW
ADS131E04IPAGR	10.2 mW
9-1462038-9 (Relay)	140 mW
1462039-4 (Relay)	100 mW
Total	556.2 mW
Budget:	1 W

Sheet: /
File: EEZ_DIB_AFE3plus.kicad_sch

Title: EEZ DIB AFE3+

Size: A4	Date: 2026-05-20
----------	------------------

KiCad E.D.A. 10.0.3

Rev: r2B1

Id: 1/5






4-ch 24-bit ADC

+2.5 V voltage reference (optional)


AFE connector

26-pin AFE connector

GND 1	2 GND
AFE_ID0 3	4 AFE_ID1
ISO_AFE_EXT_CLK 5	6 ISO_RESET
+3V3 7	8 +3V3
+5V 9	10 -5V
+15V 11	12 -15V
GND 13	14 GND
RELAY_CS 15	16 ADC_CS
SPI_SCK 17	18 AFE_CLK
SPI_MOSI 19	20 AFE_MOSI
SPI_MISO 21	22 AFE_MISO
AFE_IOEXP_CS 23	24 AFE_IOEXP_INT
GND 25	26 GND

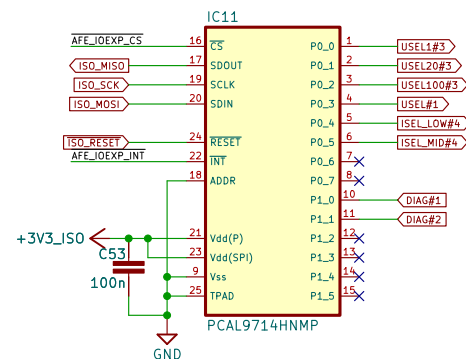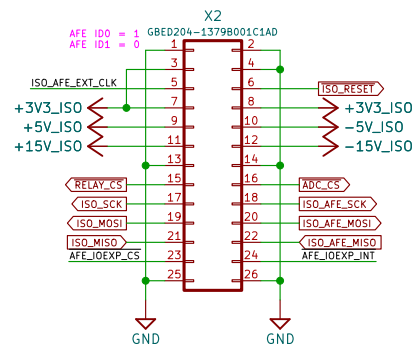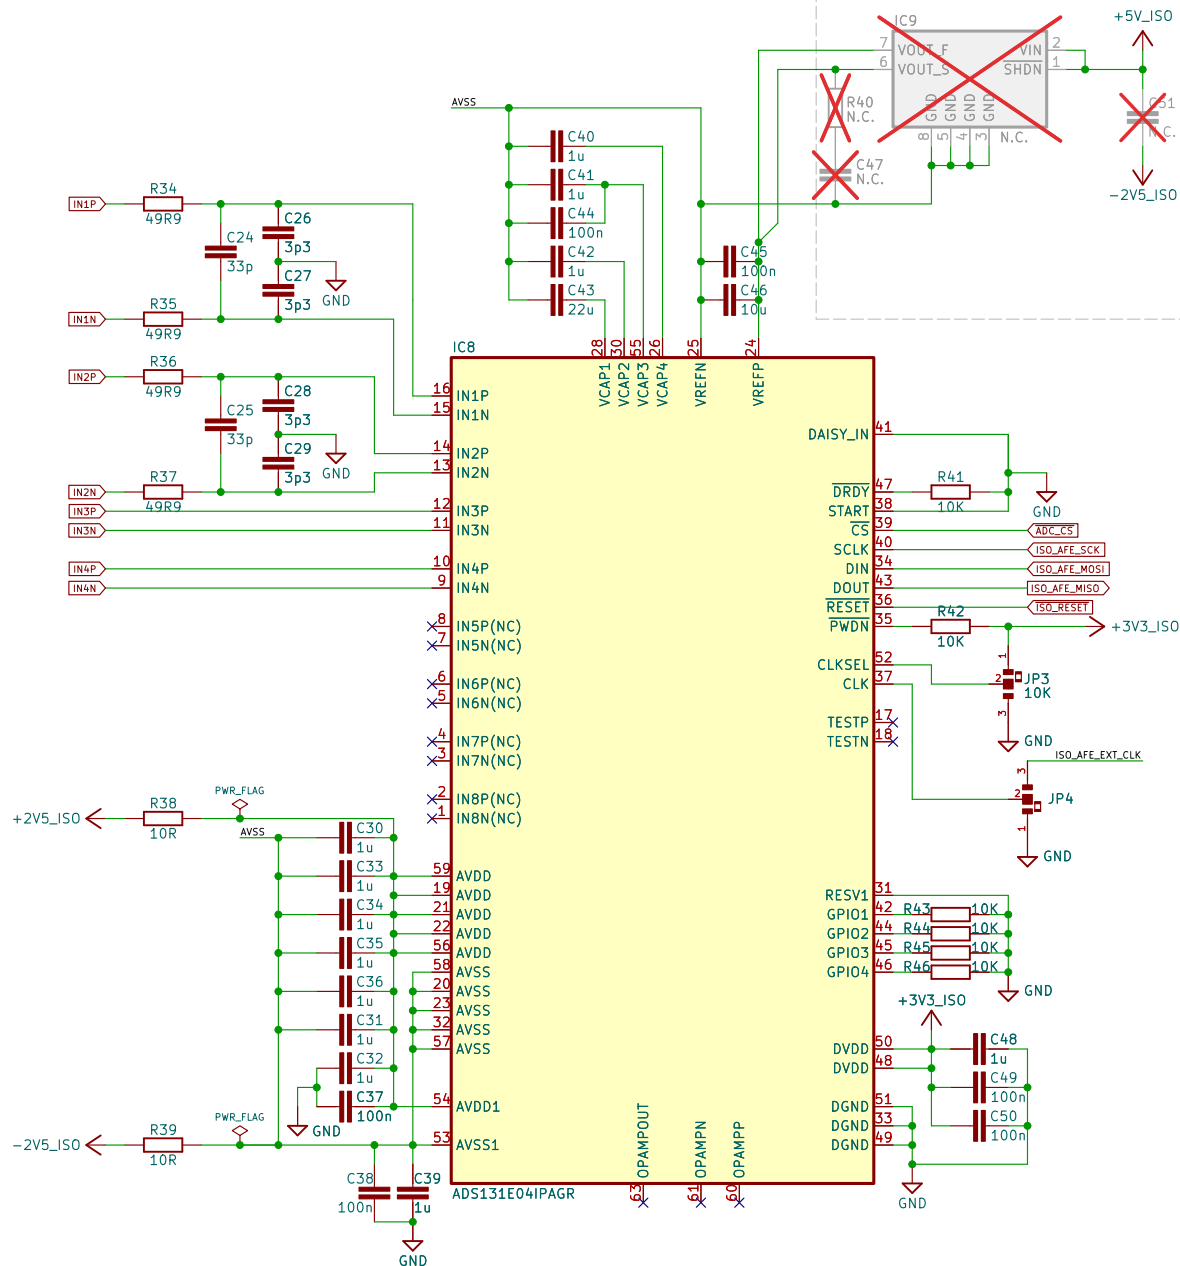

Isolated +/-2.5 V LDOs

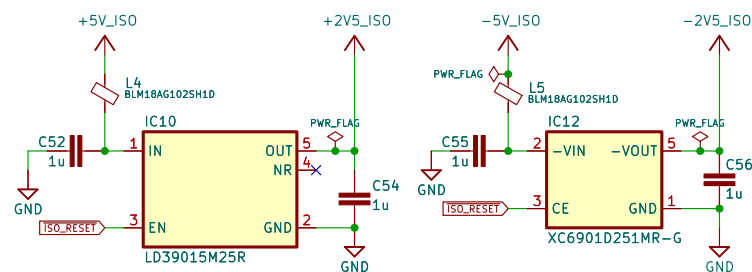

<https://www.envox.eu>

4-channel Isolated AFE for MIO168+

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Voltage/current ADC/

File: Voltage%2fcurrent_ADC.kicad_sch

Title: EEZ DIB AFE3+


Size: A4 Date: 2026-05-20

KiCad E.D.A. 10.0.3


Rev: r2B1

Id: 2/5

Isolated Voltage and Current amplifier

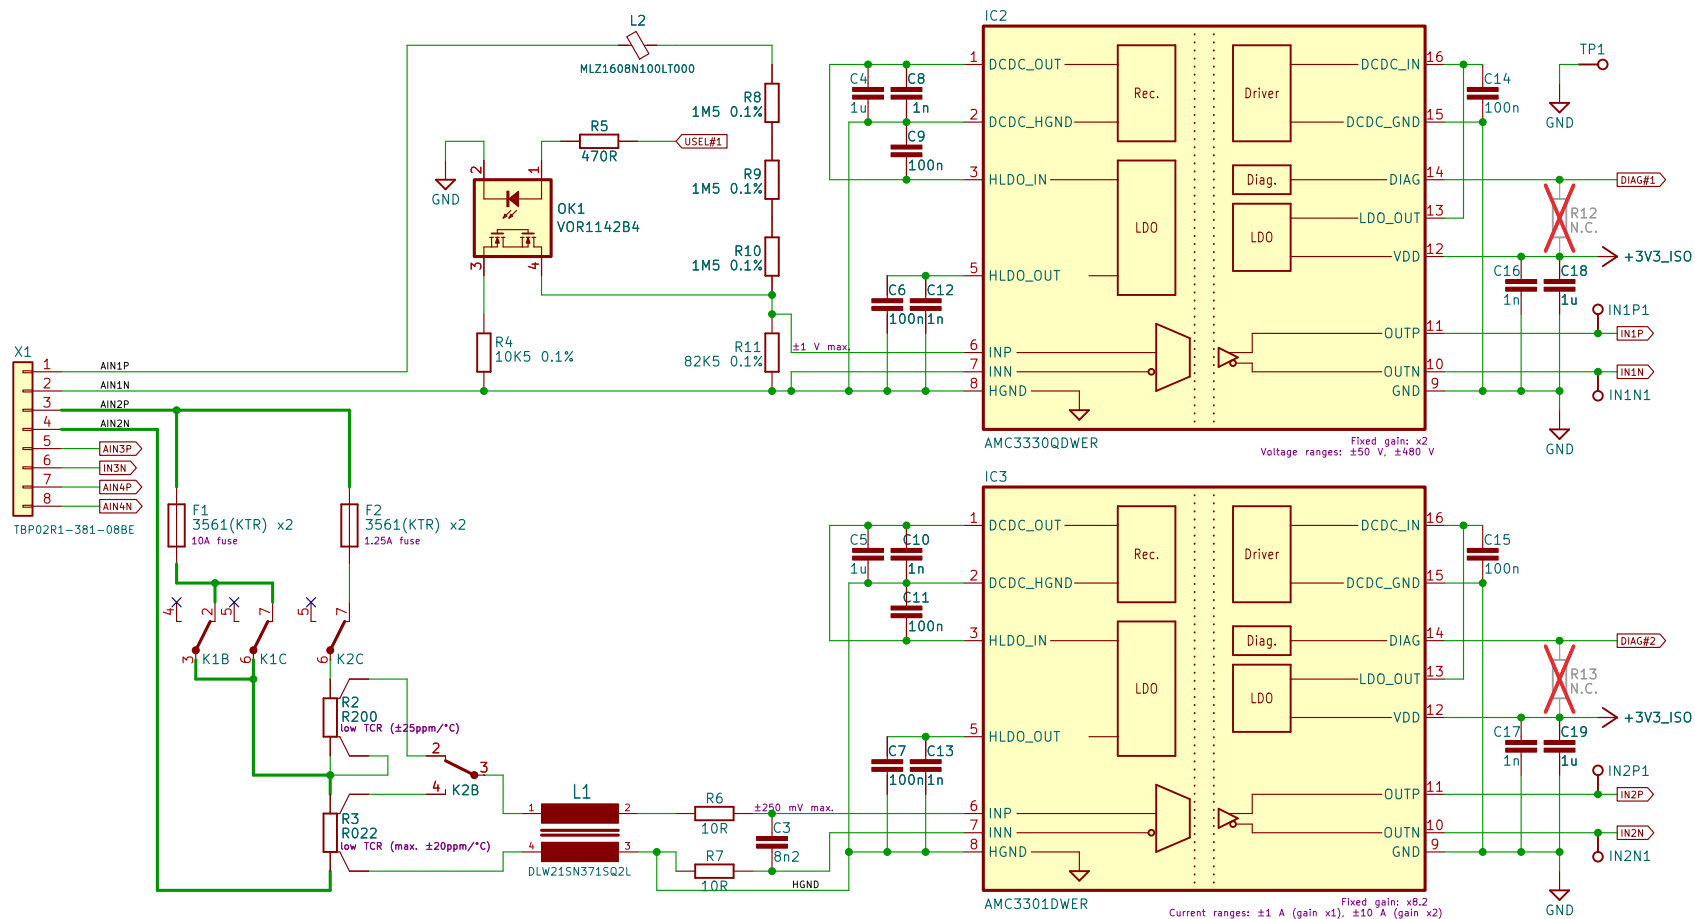

Relay driver

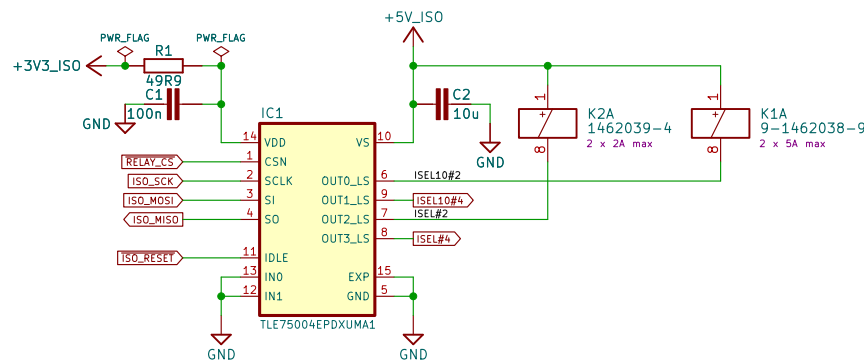

<https://www.envox.eu>

4-channel Isolated AFE for MIO168+

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Isolated Ch#1, Ch#2/

File: Isolated_Ch#1,_Ch#2.kicad_sch

Title: EEZ DIB AFE3+

Size: A4

Date: 2026-05-20

KiCad E.D.A. 10.0.3

Rev: r2B1

Id: 3/5

