

□ □ □ □ □

□ □ □ □ □

□

Power consumption (worst case):	
AMC3330QDWER	155 mW
AMC3301DWER	151 mW
AD5131E04IPAGR	10.2 mW
9-1462038-9 (Relay) x2	280 mW
1462039-4 (Relay) x2	200 mW
Total	796.2 mW
Budget:	5 W

Id: 1/5






4-ch 24-bit ADC


+2.5 V voltage reference (optional)

AFE connector

26-pin AFE connector

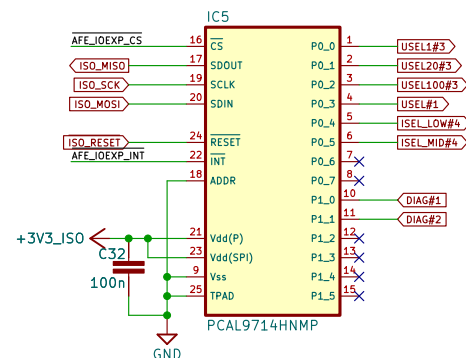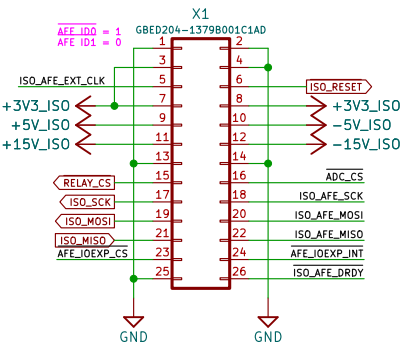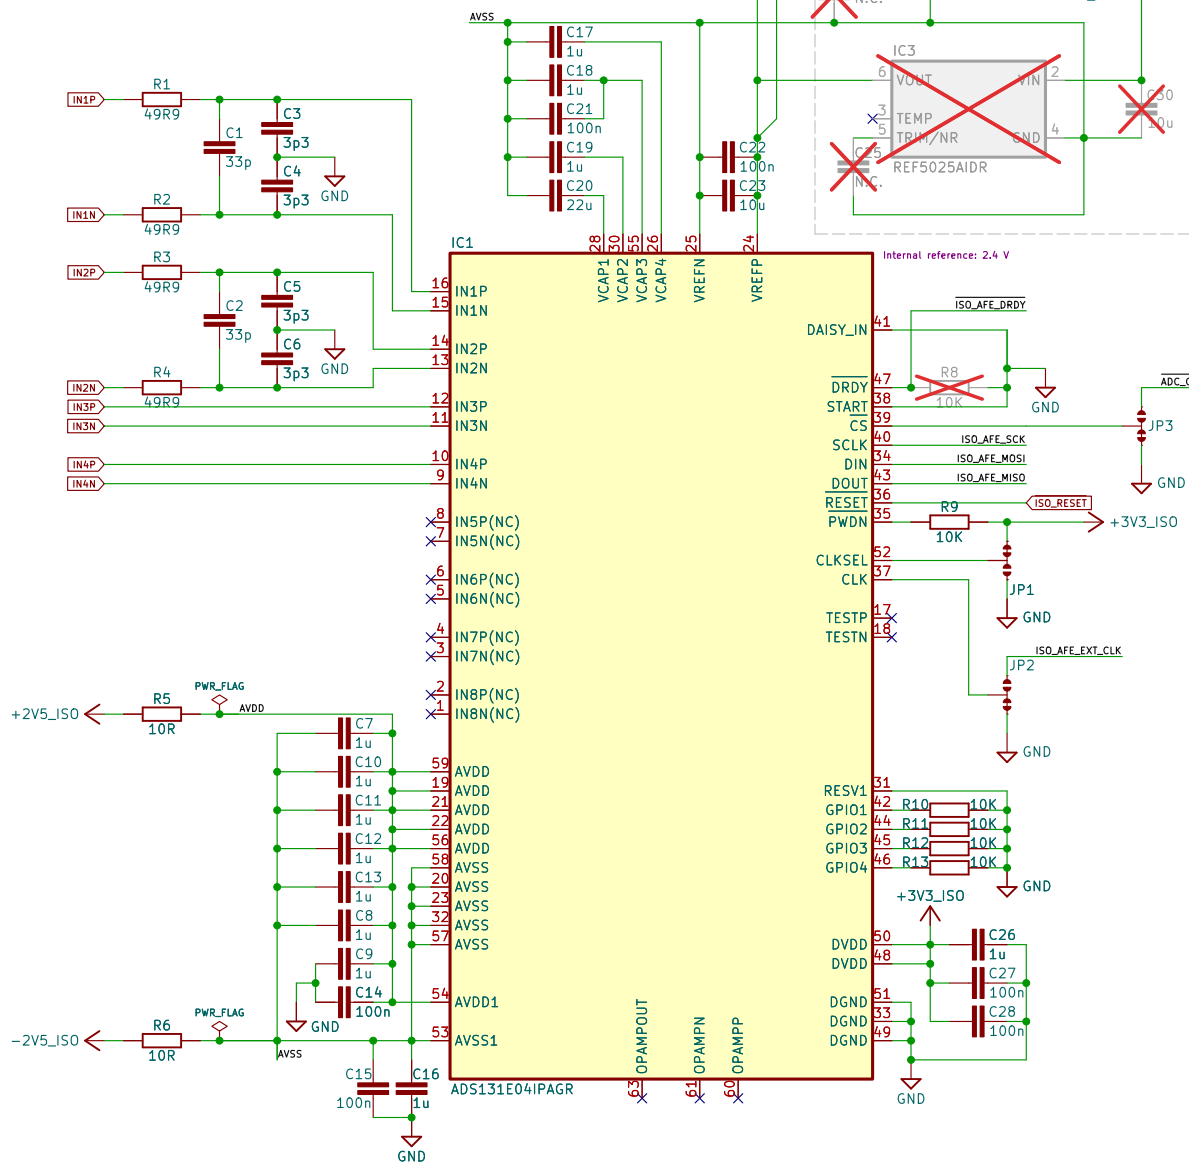

+/-2.5 V LDOs

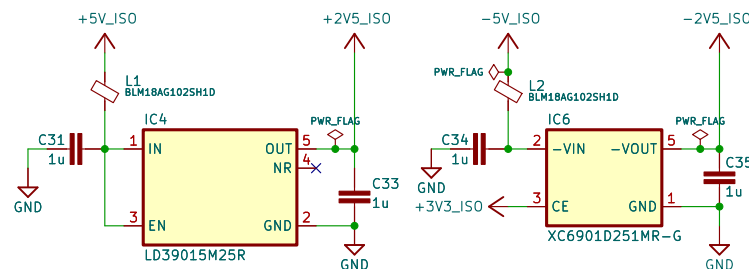

<https://www.envox.eu>

4-channel Isolated AFE for MIO168+

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /ADC, IOexp, LDOs/

File: ADC.kicad_sch

Title: EEZ DIB AFE3+

Size: A4

Date: 2026-10-05

KiCad E.D.A. 10.0.6

Rev: r1B2



Id: 2/5

Isolated Voltage and Current amplifier


8-pin isolated two channels connector

CH#1 Vin+ 8
CH#1 Vin- 7
CH#2 CS+ 6
CH#2 CS- 5
CH#3 Vin+ 4
CH#3 Vin- 3
CH#4 CS+ 2
CH#4 CS- 1

X2
8 AIN1P
7 AIN1N
6 AIN2P
5 AIN2N
4 AIN3P
3 AIN3N
2 AIN4P
1 AIN4N
TBP02R1-381-08BE

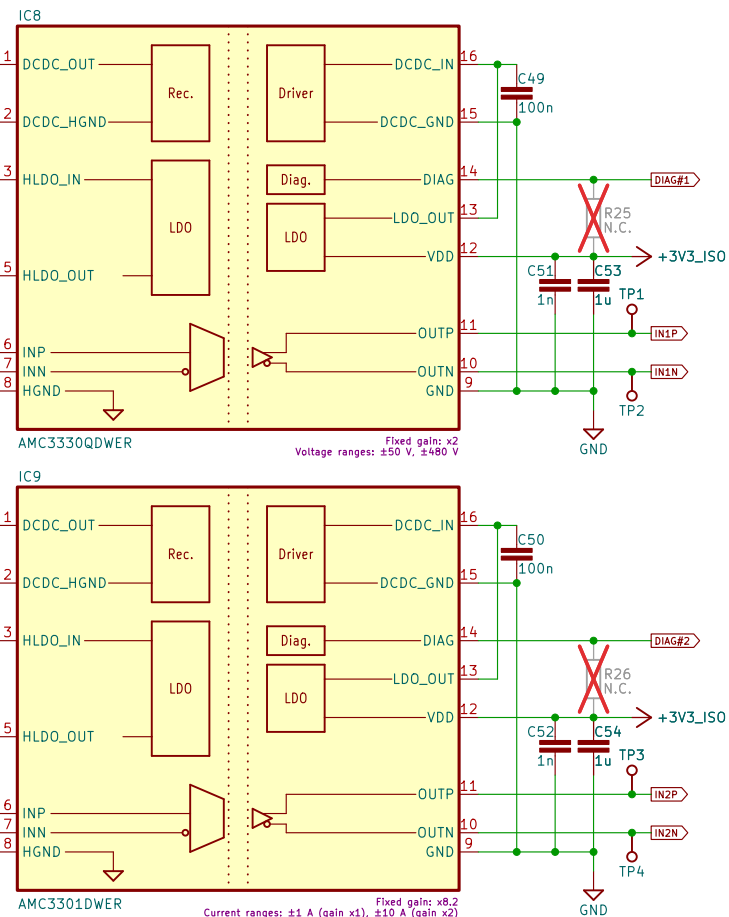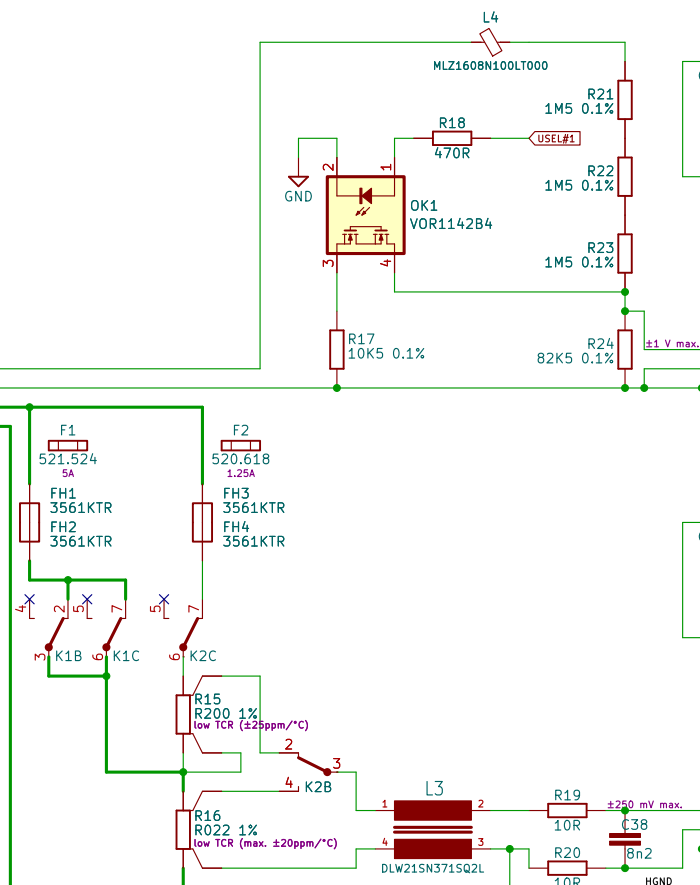

Relay driver

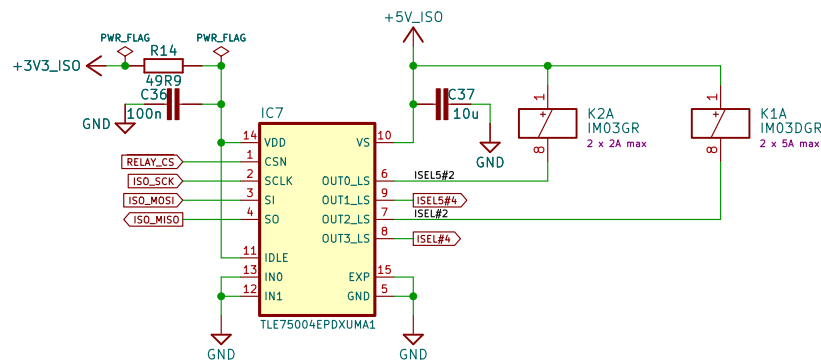


<https://www.envox.eu>
4-channel Isolated AFE for MIO168+
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.


Sheet: /Isolated Ch#1, Ch#2/
File: Isolated_Ch1_Ch2.kicad_sch

Title: EEZ DIB AFE3+

Size: A4 Date: 2026-10-05
KiCad E.D.A. 10.0.6

Rev: r1B2
Id: 3/5

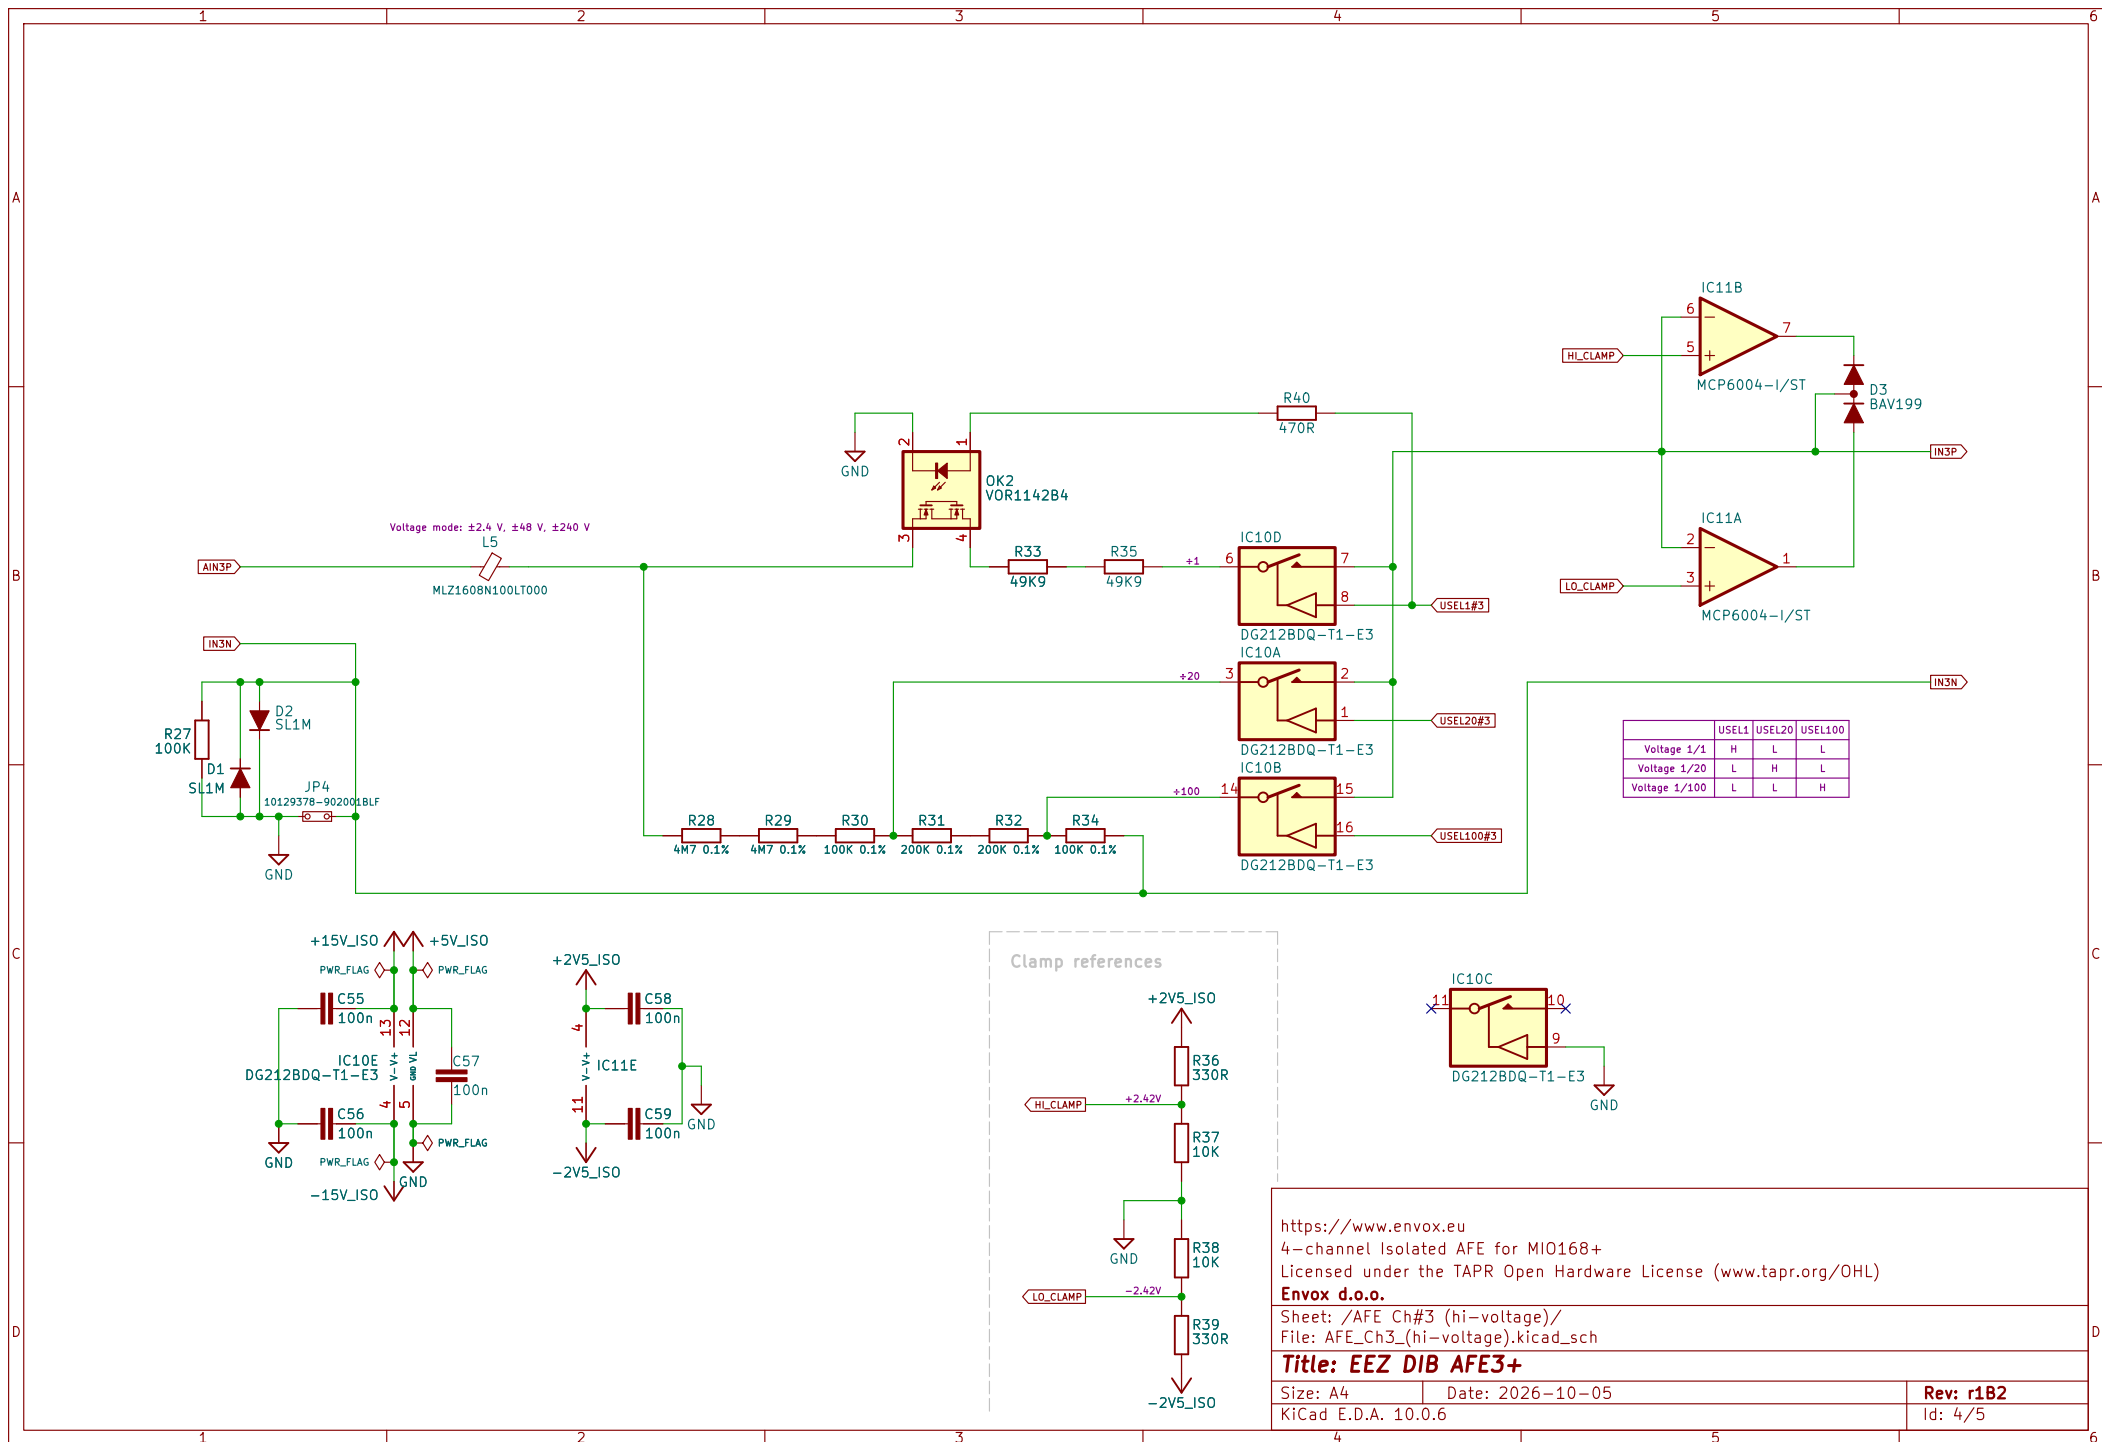

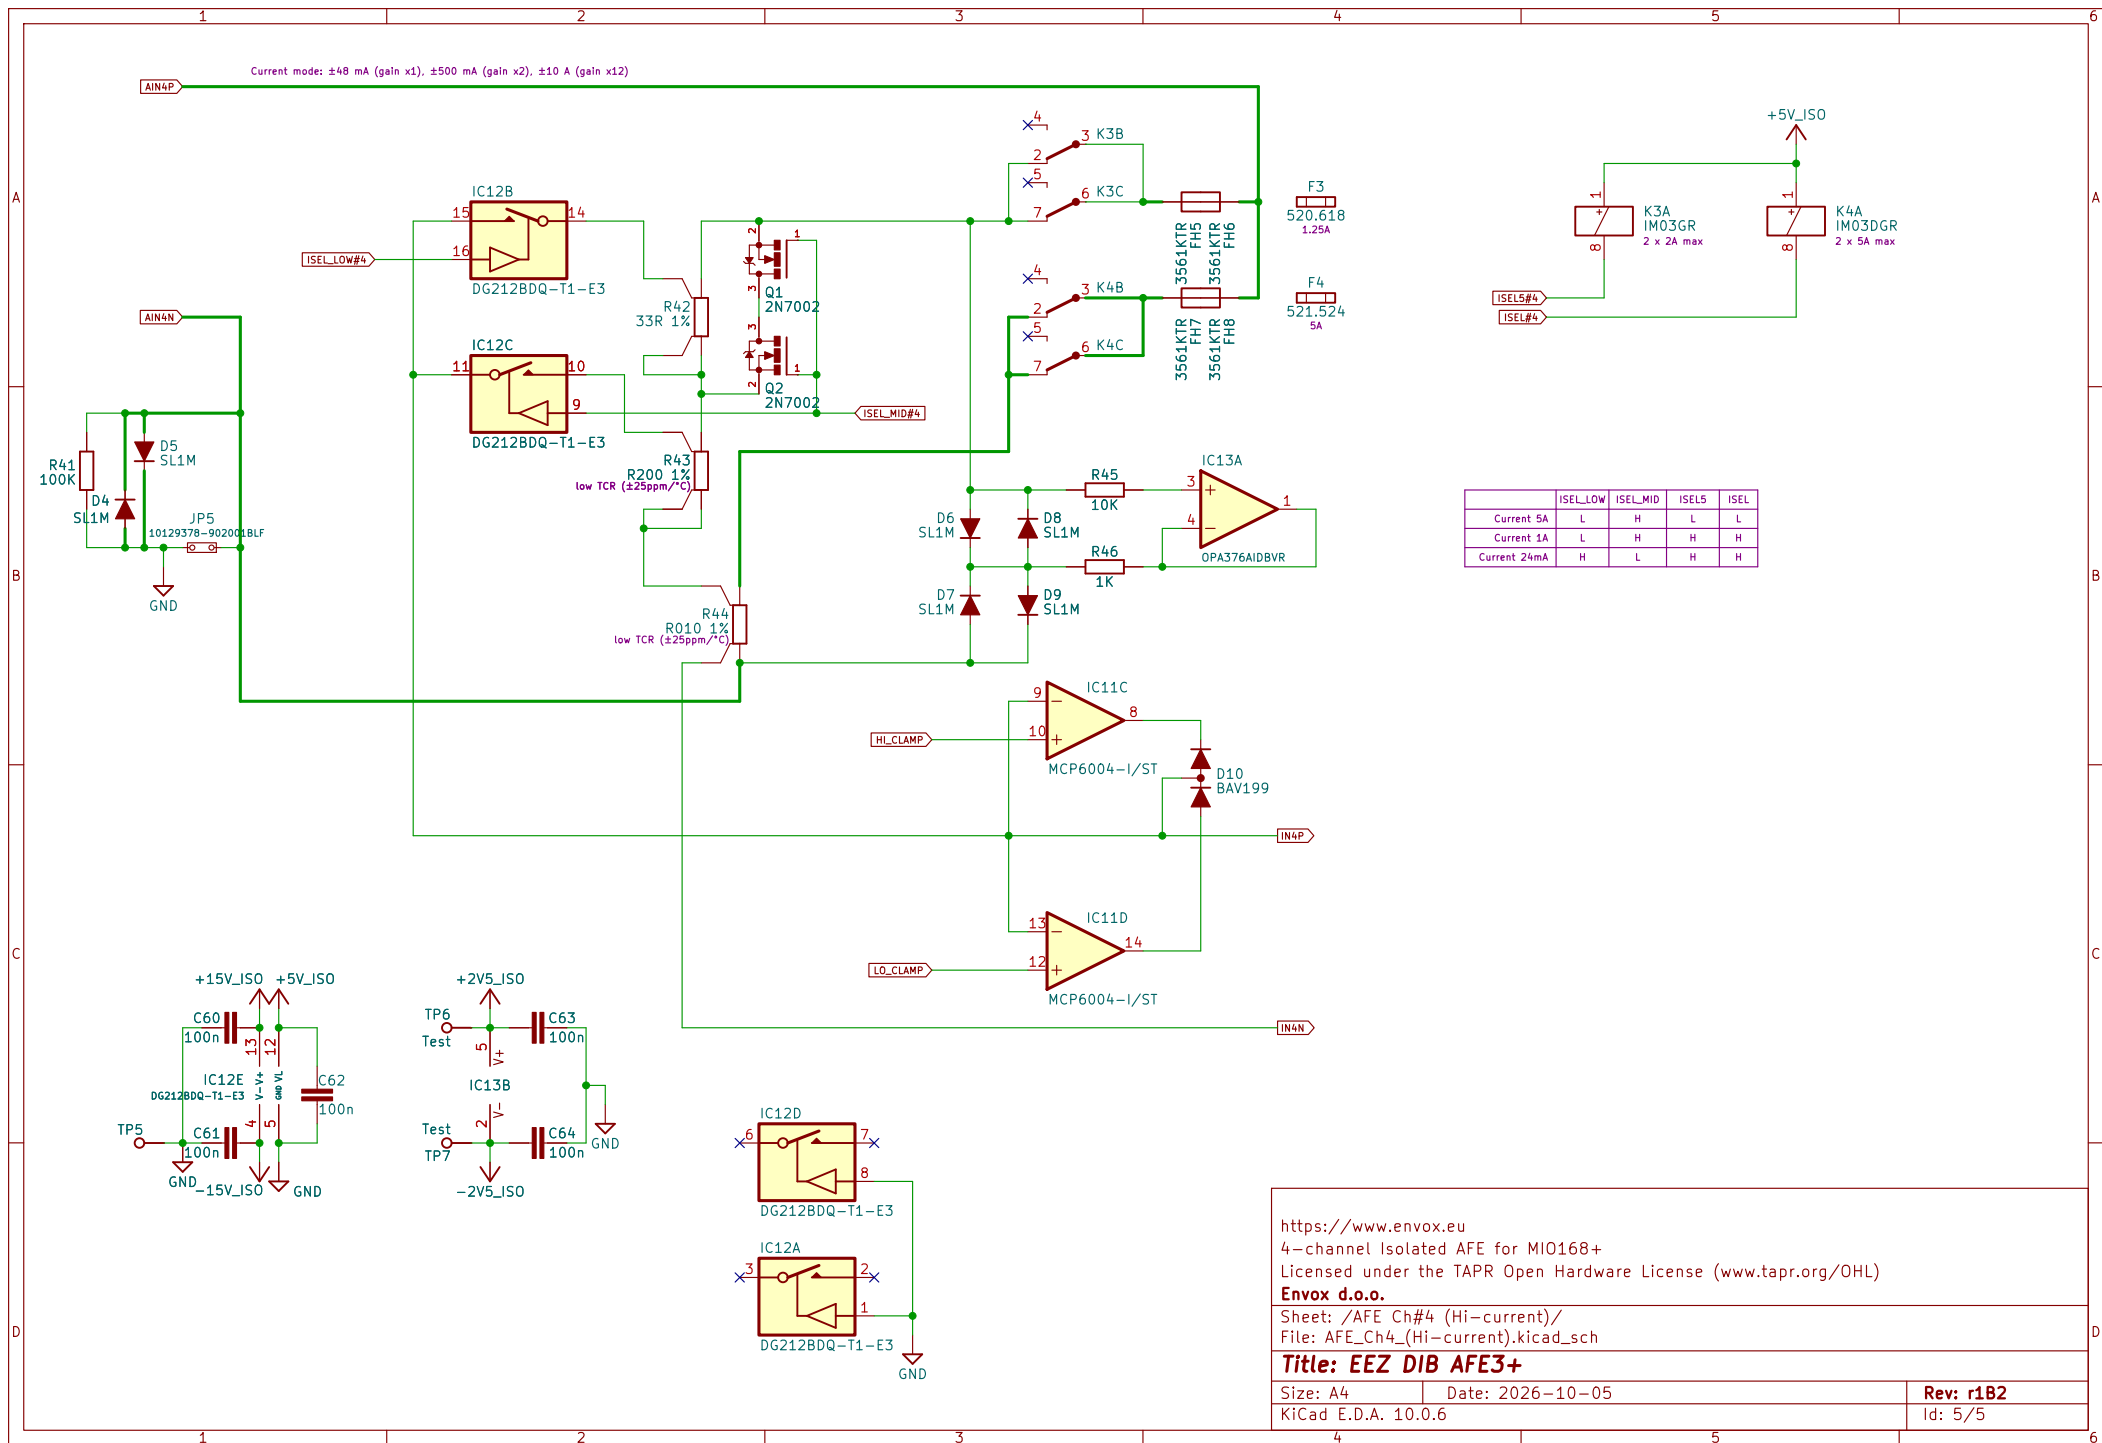

https://www.envox.eu
 4-channel Isolated AFE for MIO168+
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /AFE Ch#4 (Hi-current)/
 File: AFE_Ch4_(Hi-current).kicad_sch
Title: EEZ DIB AFE3+
 Size: A4 Date: 2026-10-05
 KiCad E.D.A. 10.0.6
Rev: r1B2
 Id: 5/5