
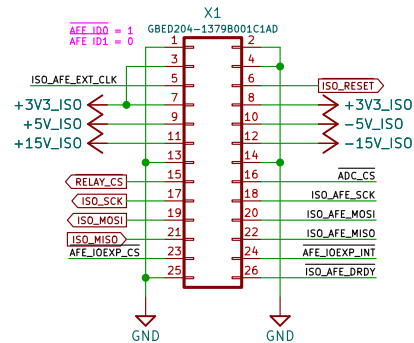


4-ch 24-bit ADC


+2.5 V voltage reference (optional)

AFE connector


26-pin AFE connector

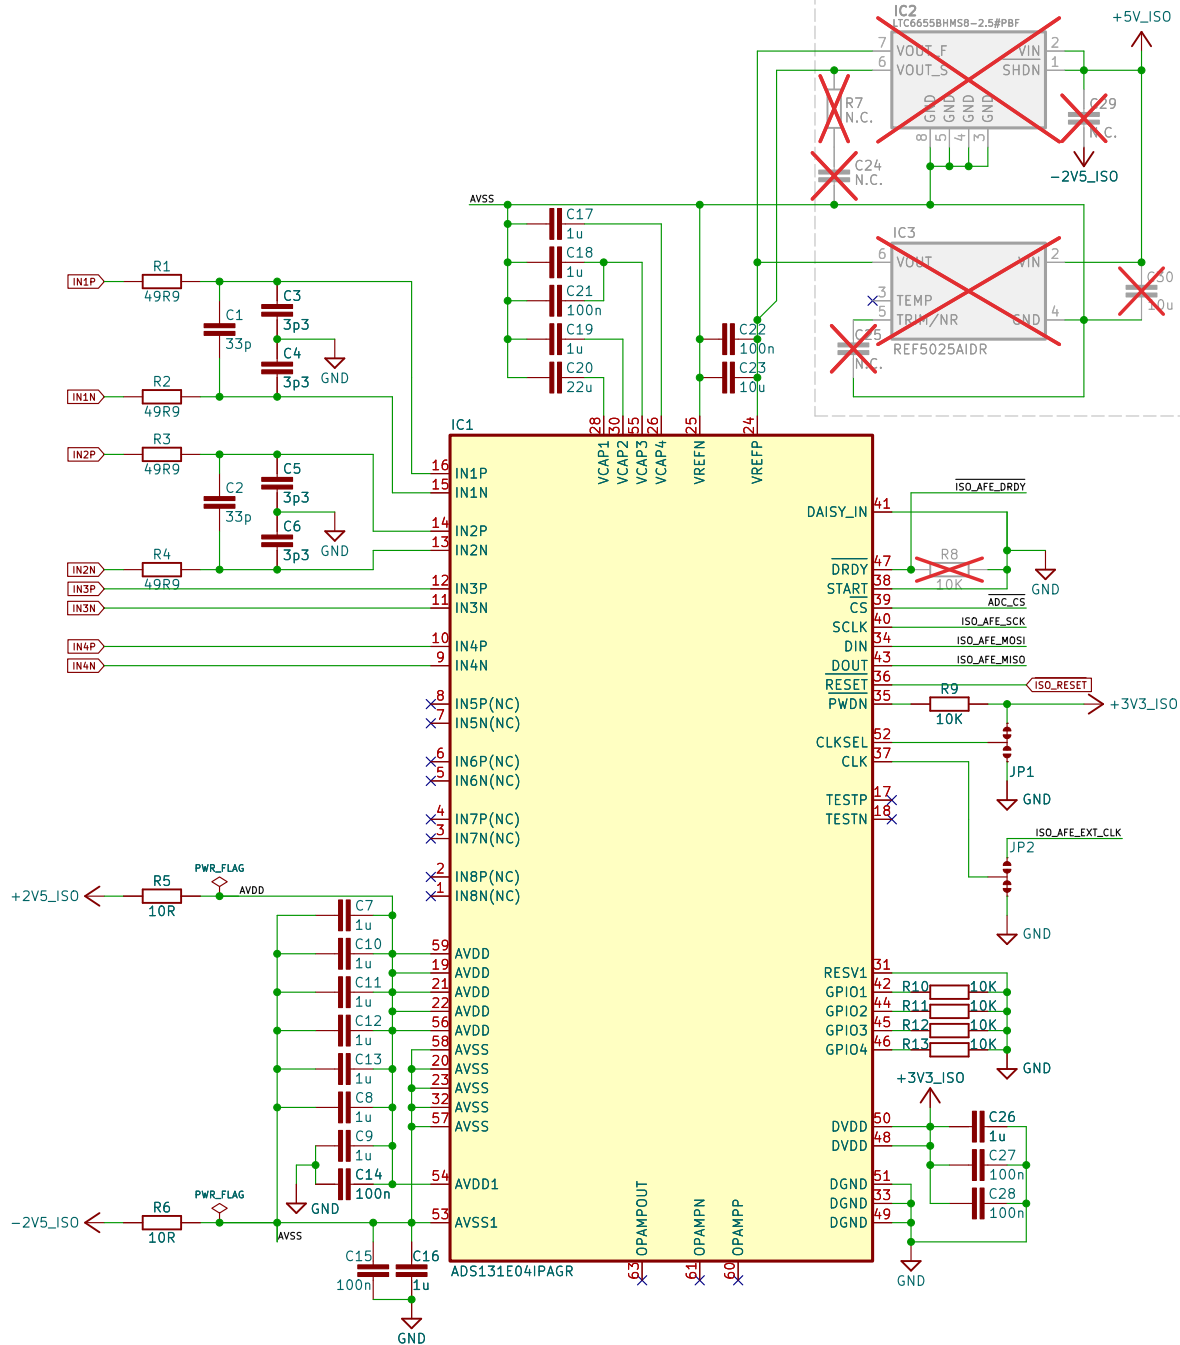

GND 1	2 GND
AFE_ID0 3	4 AFE_ID1
ISO_AFE_EXT_CLK 5	6 ISO_RESET
+3V3 7	8 +3V3
+5V 9	10 -5V
+15V 11	12 -15V
GND 13	14 GND
RELAY_CS 15	16 ADC_CS
SPI_SCK 17	18 AFE_CLK
SPI_MOSI 19	20 AFE_MOSI
SPI_MISO 21	22 AFE_MISO
AFE_IOEXP_CS 23	24 AFE_IOEXP_INT
GND 25	26 ISO_AFE_DRDY

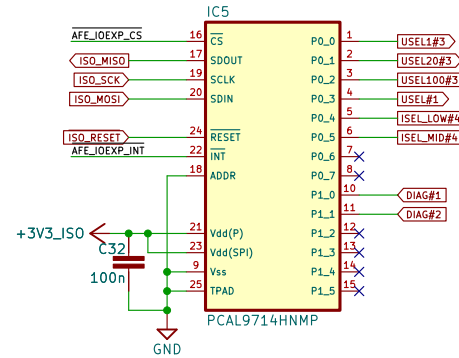

+/-2.5 V LDOs

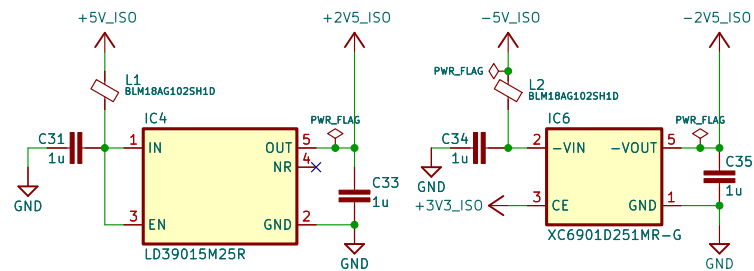

<https://www.envox.eu>
 4-channel Isolated AFE for MIO168+
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /ADC, IOexp, LDOs/
 File: ADC.kicad_sch

Title: EEZ DIB AFE3+

Size: A4 Date: 2026-08-12
 KiCad E.D.A. 10.0.5

Rev: r1B1
 Id: 2/5

Isolated Voltage and Current amplifier

8-pin isolated two channels connector

- CH#2 CS- 1
- CH#2 CS+ 2
- CH#2 Vin- 3
- CH#2 Vin+ 4
- CH#1 CS- 5
- CH#1 CS+ 6
- CH#1 Vin- 7
- CH#1 Vin+ 8

X2
8 AIN1P
7 AIN1N
6 AIN2P
5 AIN2N
4 AIN3P
3 IN3N
2 AIN4P
1 AIN4N

TBP02R1-381-08BE

F1 3561(KTR) x2
10A fuse

F2 3561(KTR) x2
1.25A fuse

K1B K1C K2C



R15 R200
low TCR ($\pm 25\text{ppm}/^\circ\text{C}$)

R16 R022
low TCR (max. $\pm 20\text{ppm}/^\circ\text{C}$)


L3
DLW215N3715Q2L

R19 10R $\pm 250\text{ mV max.}$
R20 10R

C38 8n2
HGND

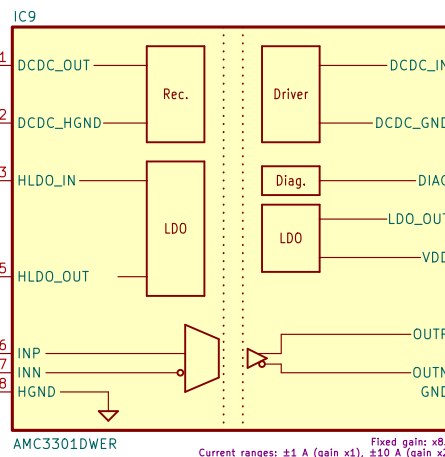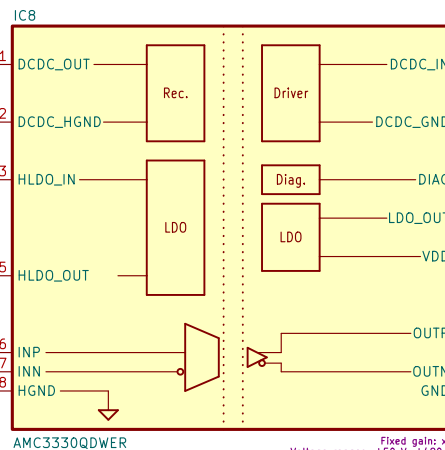

Relay driver

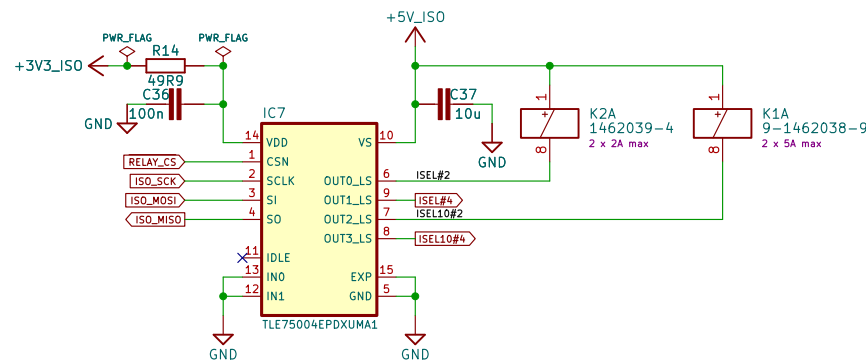

<https://www.envox.eu>

4-channel Isolated AFE for MIO168+

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Isolated Ch#1, Ch#2/

File: Isolated_Ch#1,_Ch#2.kicad_sch

Title: EEZ DIB AFE3+


Size: A4

Date: 2026-08-07

KiCad E.D.A. 10.0.5

Rev: r1B1

Id: 3/5

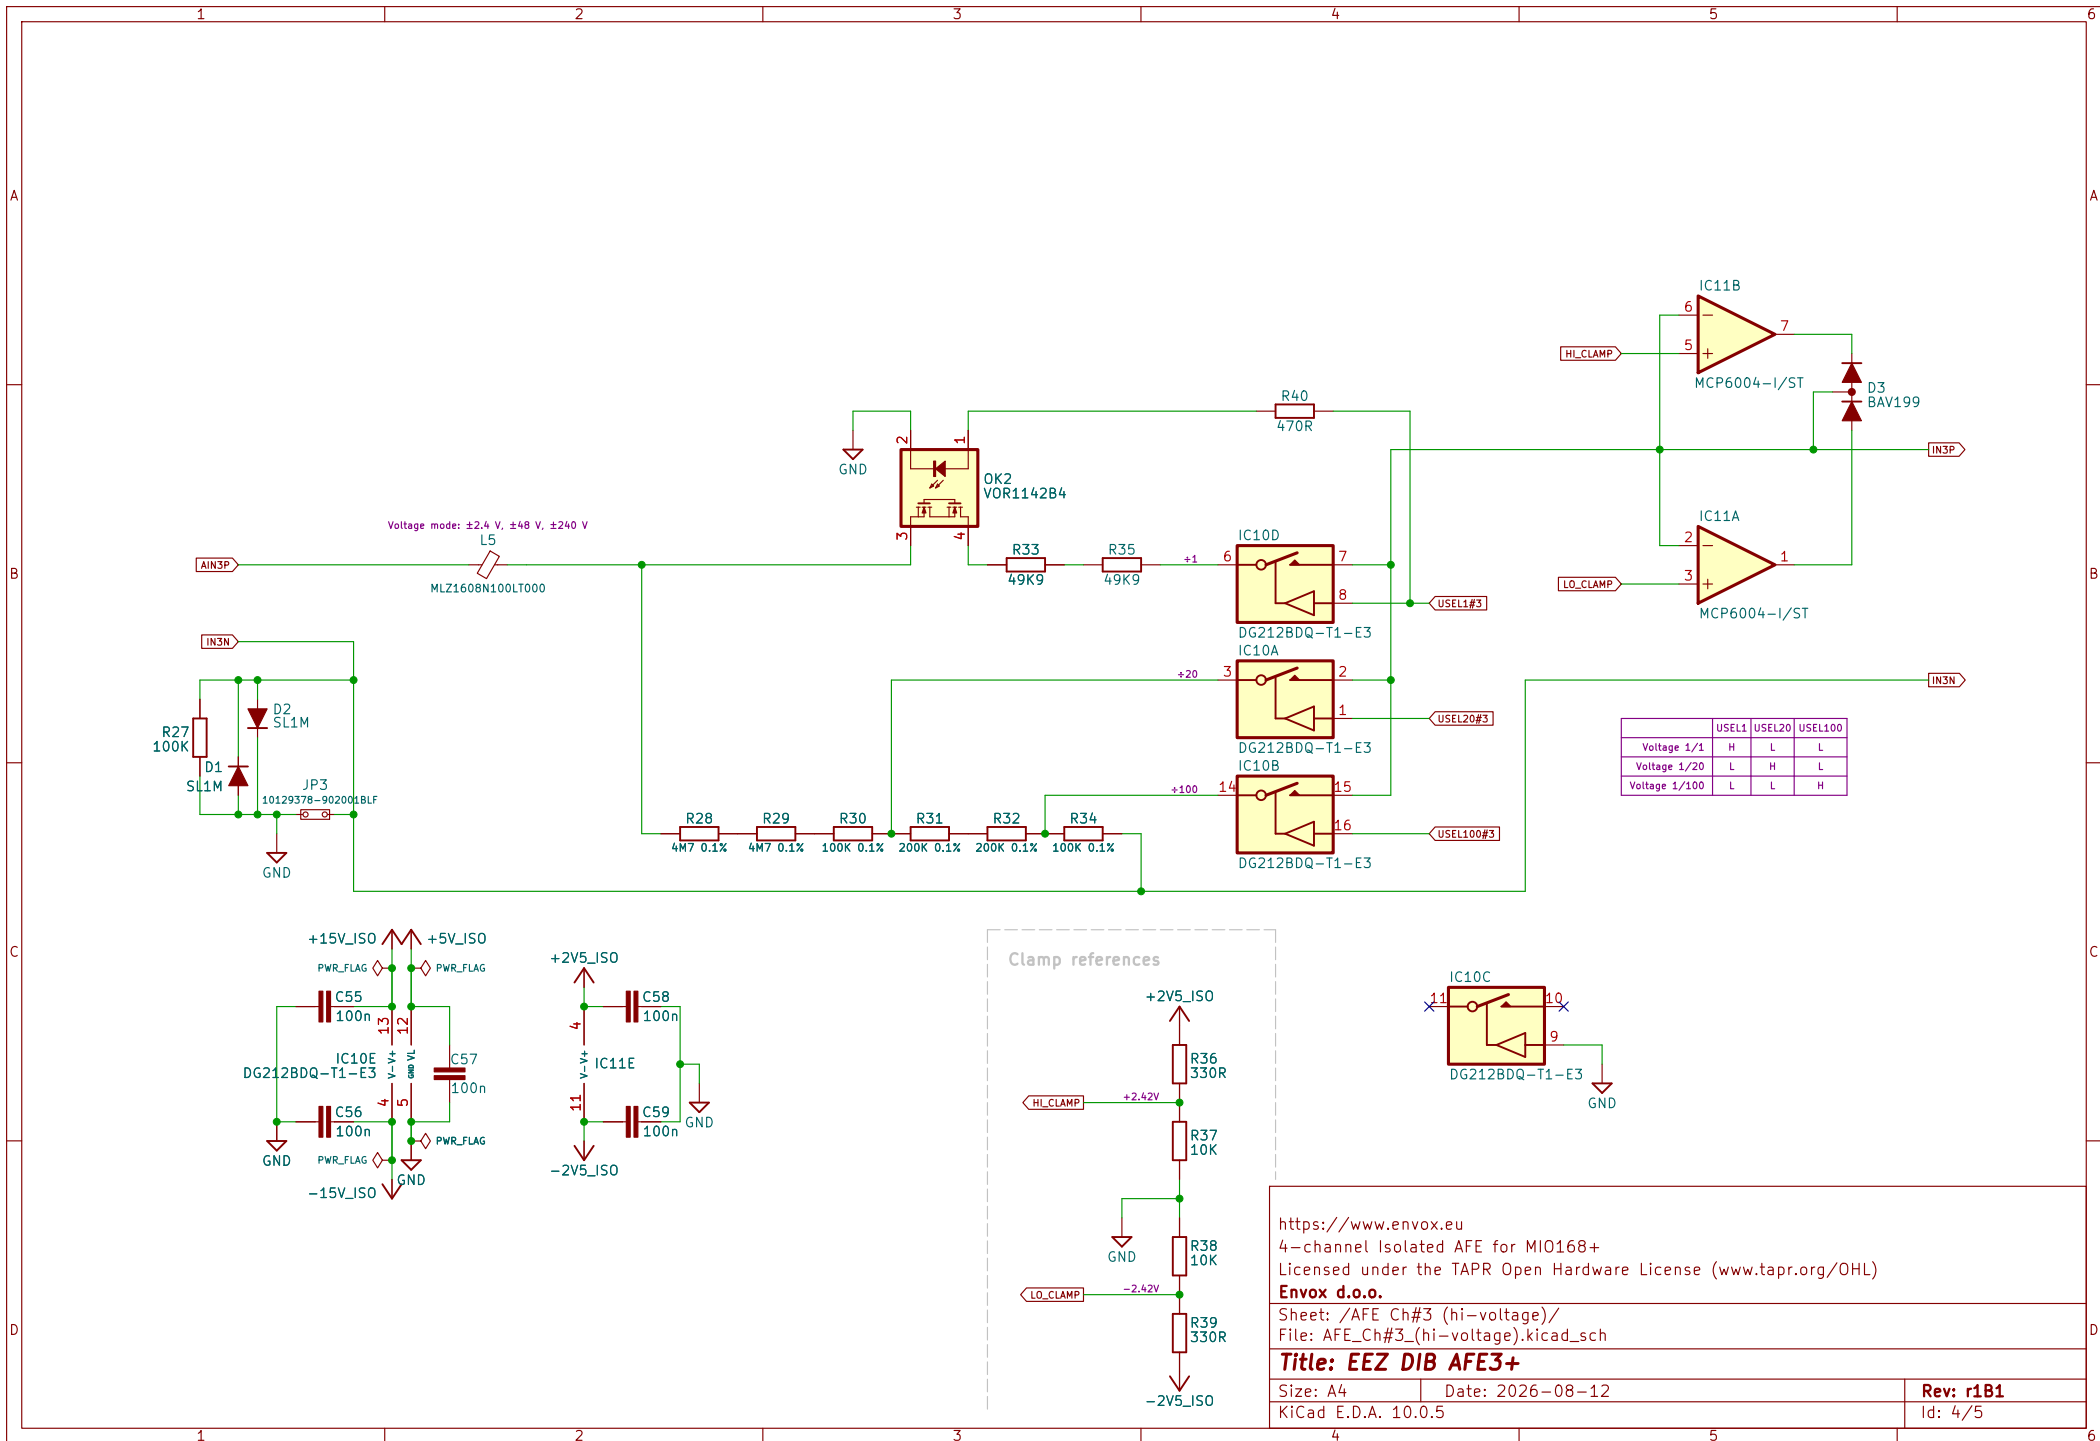

<https://www.envox.eu>
 4-channel Isolated AFE for MIO168+
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /AFE Ch#3 (hi-voltage)/
 File: AFE_Ch#3_(hi-voltage).kicad_sch

Title: EEZ DIB AFE3+

Size: A4 Date: 2026-08-12
 KiCad E.D.A. 10.0.5

Rev: r1B1
 Id: 4/5

