

□ □ □ □ □

--	--

□ □ □ □ □

□ □ □ □ □

Power consumption (worst case):	
AMC3330QDWER	155 mW
AMC3301DWER	151 mW
AD5131E04IPAGR	10.2 mW
9-1462038-9 (Relay) x2	280 mW
1462039-4 (Relay) x2	200 mW
Total	796.2 mW
Budget:	5 W







SIZE: A1	
KiCad E.D.A. 10.0.4	

4-ch 24-bit ADC


+2.5 V voltage reference (optional)

AFE connector

26-pin AFE connector

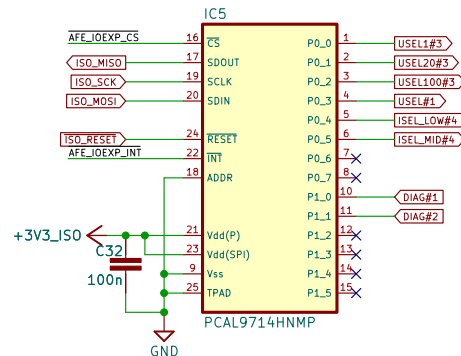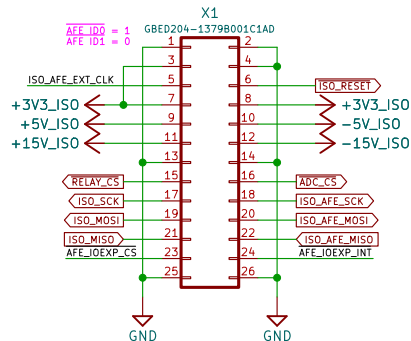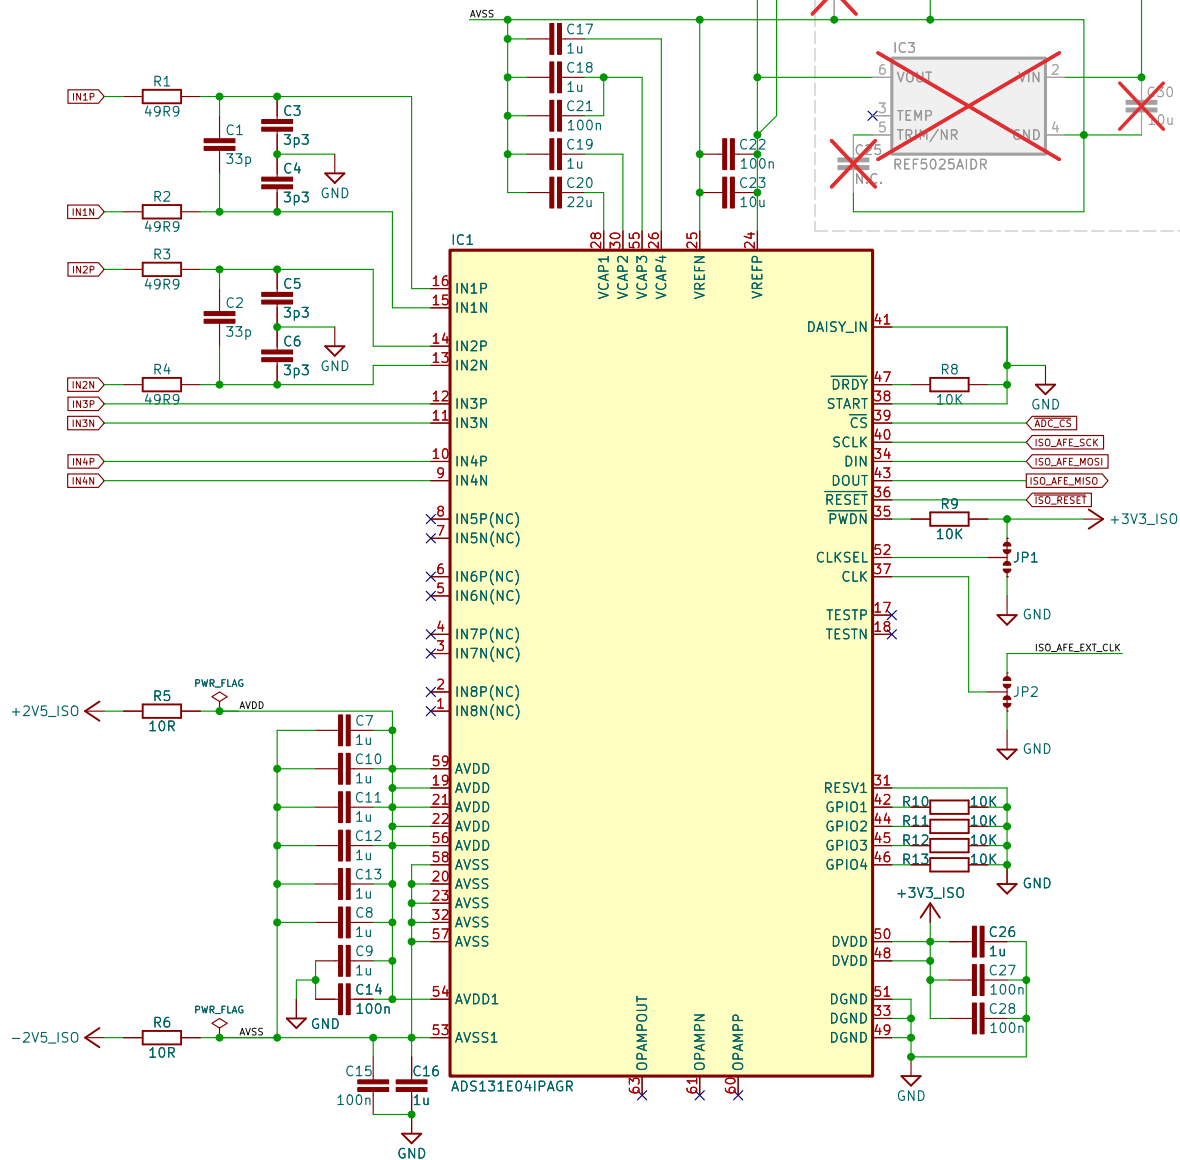

+/-2.5 V LD0s

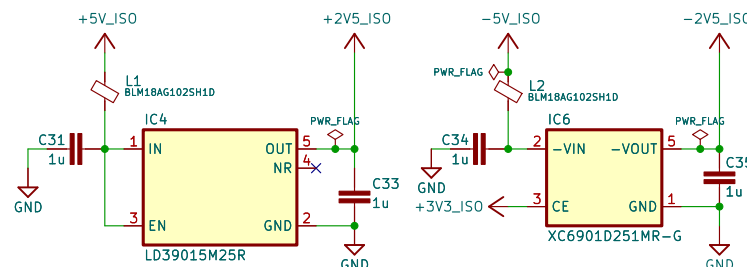

<https://www.envox.eu>
4-channel Isolated AFE for MIO168+
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /ADC, IOexp, LD0s/

File: ADC.kicad_sch

Title: EEZ DIB AFE3+

Size: A4 Date: 2026-07-19

KiCad E.D.A. 10.0.4

Rev: r2B1


Id: 2/5

Isolated Voltage and Current amplifier


8-pin isolated two channels connector

- CH#2 CS- 1
- CH#2 CS+ 2
- CH#2 Vin- 3
- CH#2 Vin+ 4
- CH#1 CS- 5
- CH#1 CS+ 6
- CH#1 Vin- 7
- CH#1 Vin+ 8

TBPO2R1-381-08BE

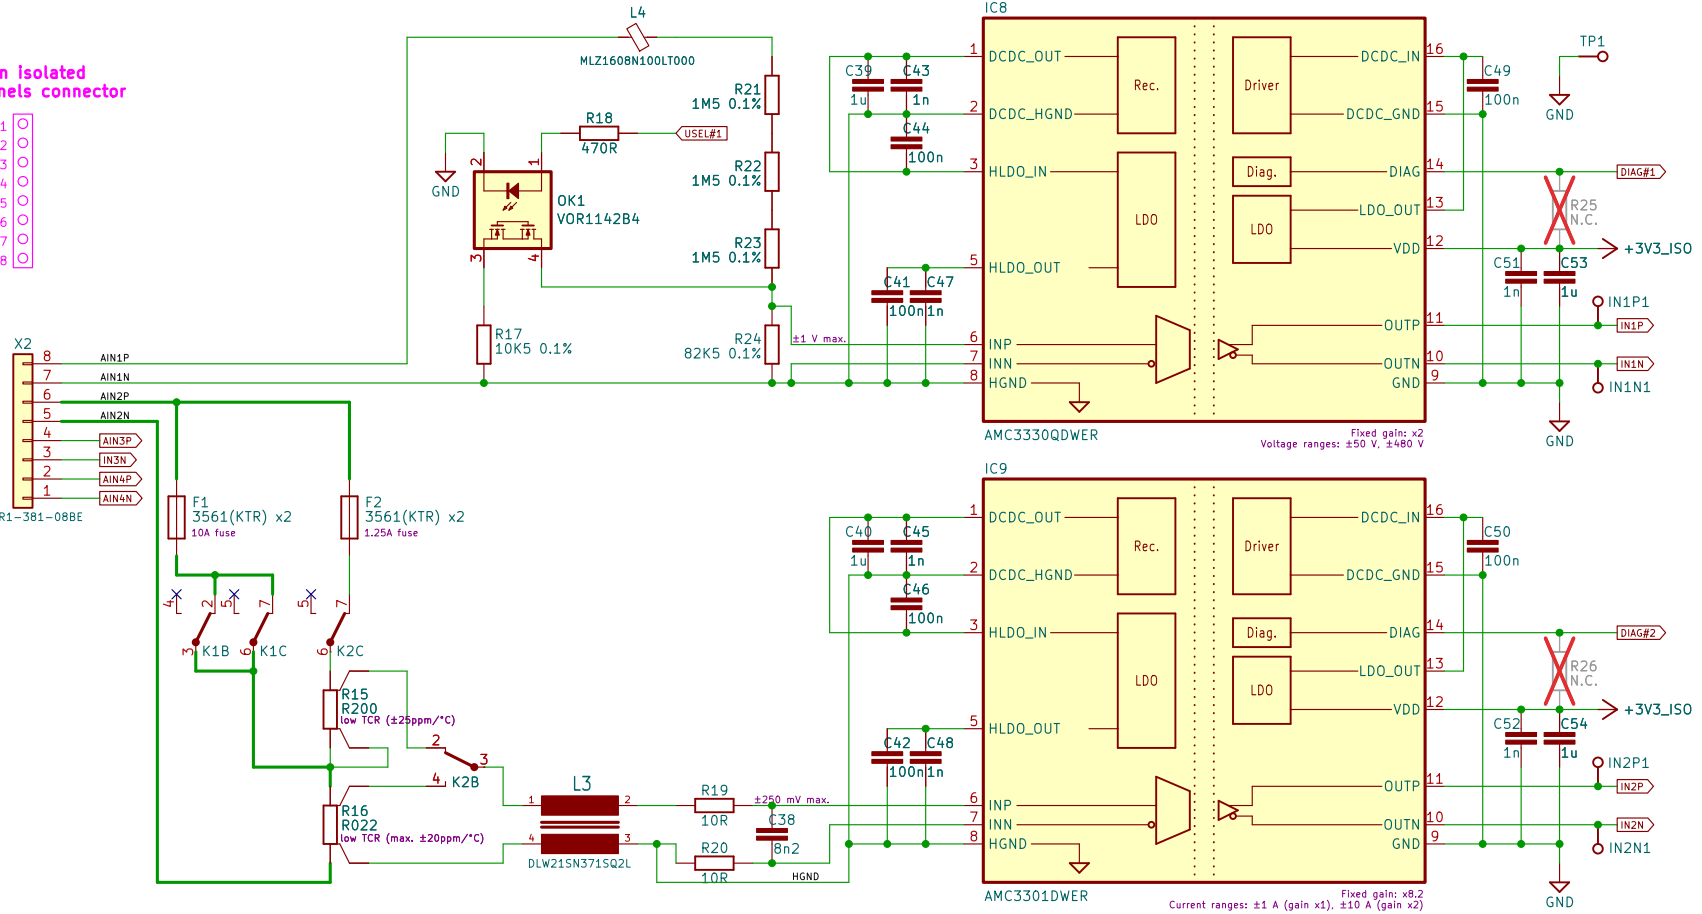

Relay driver

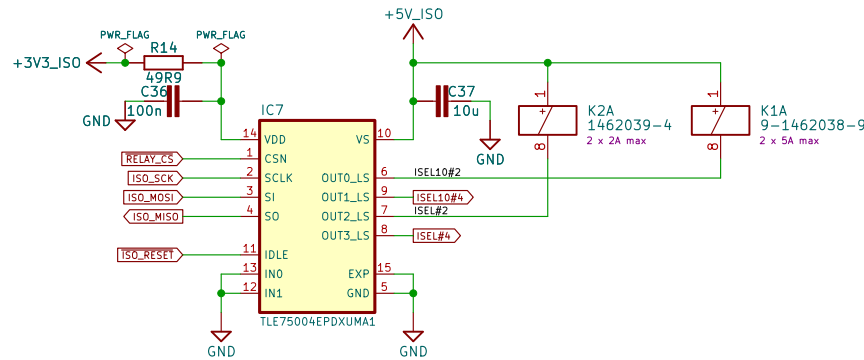

<https://www.envox.eu>

4-channel Isolated AFE for MIO168+

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Isolated Ch#1, Ch#2/

File: Isolated_Ch#1,_Ch#2.kicad_sch

Title: EEZ DIB AFE3+

Size: A4

Date: 2026-07-19

KiCad E.D.A. 10.0.4

Rev: r2B1

Id: 3/5

