






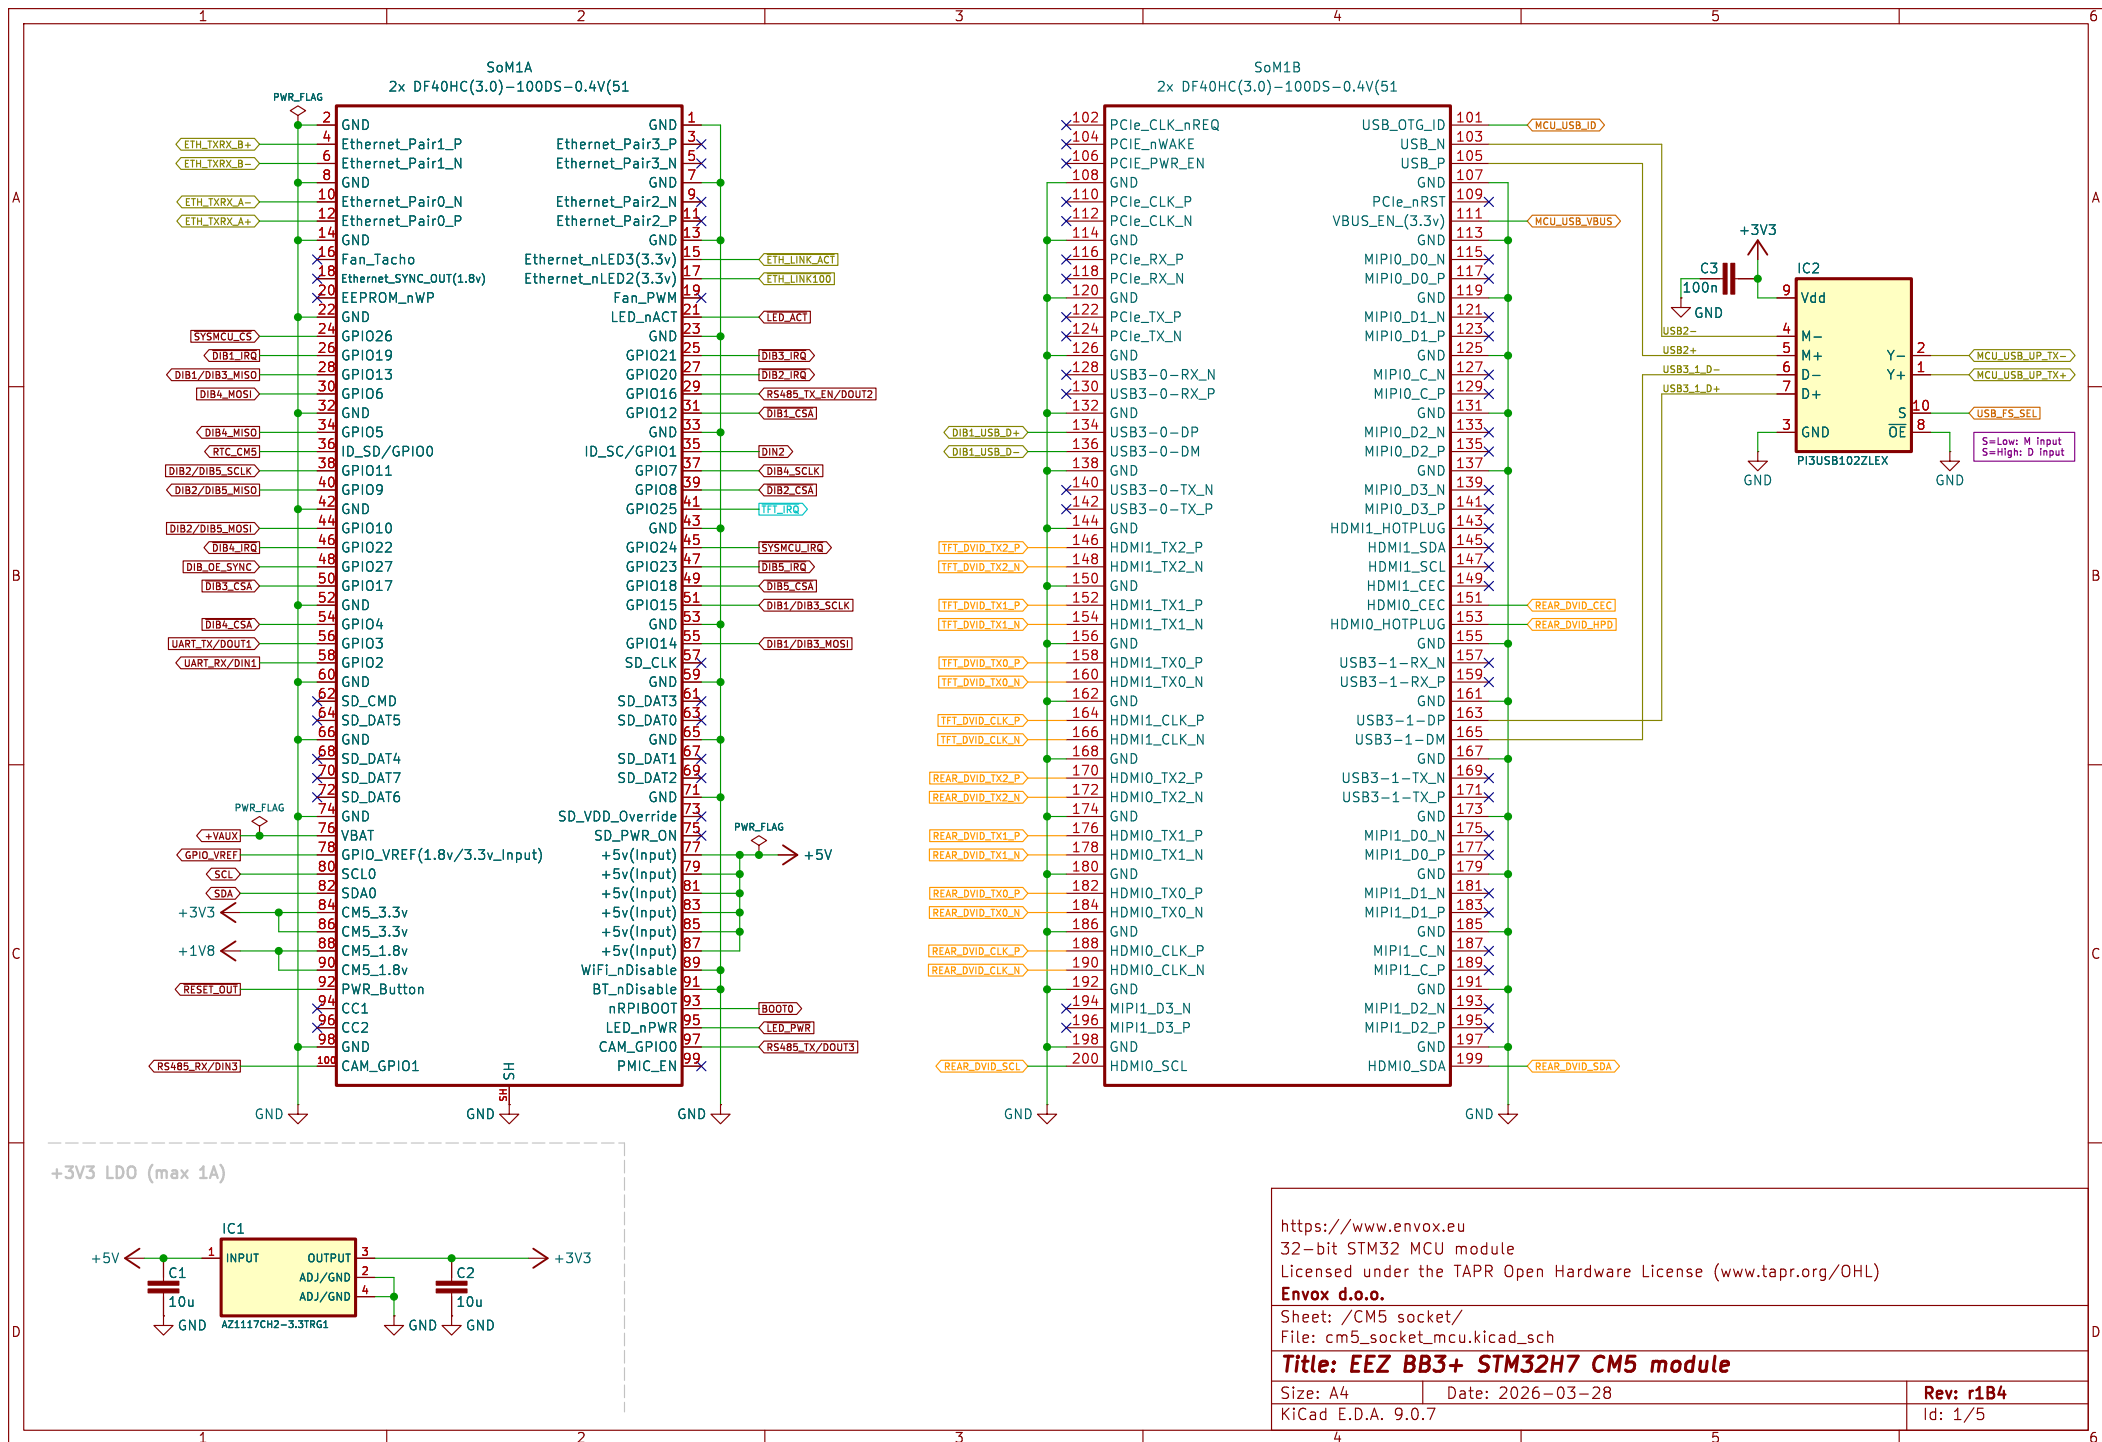

https://www.envox.eu
 32-bit STM32 MCU module
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /CM5 socket/
 File: cm5_socket_mcu.kicad_sch
Title: EEZ BB3+ STM32H7 CM5 module
 Size: A4 Date: 2026-03-28
 KiCad E.D.A. 9.0.7 Rev: r1B4
 Id: 1/5

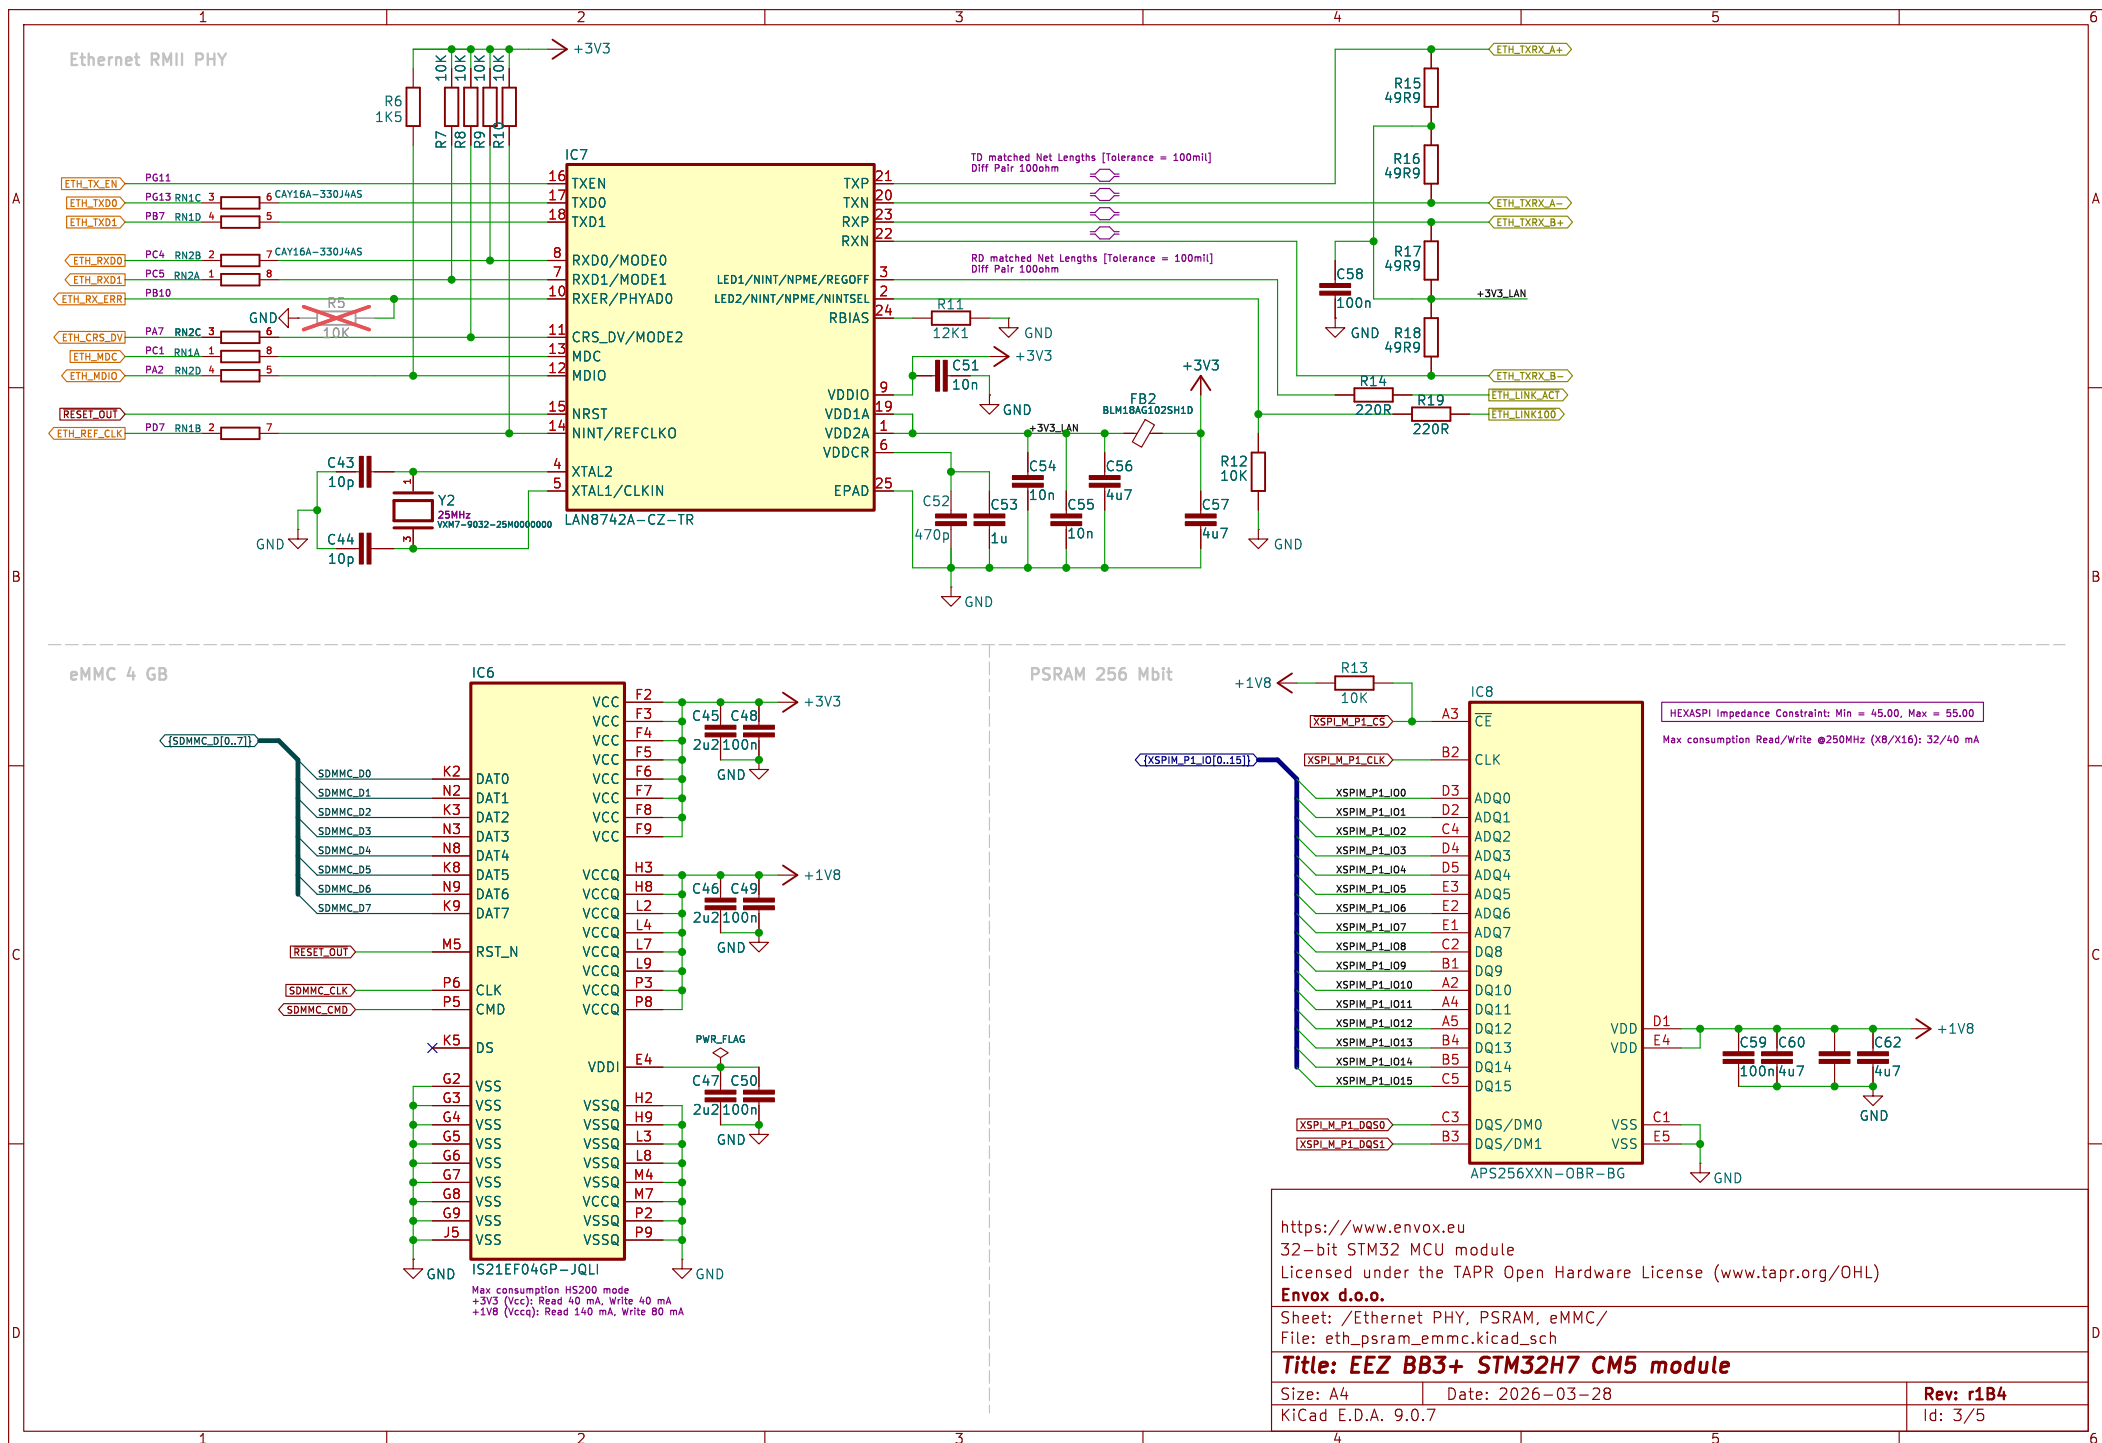

RGB-to-DVID converter

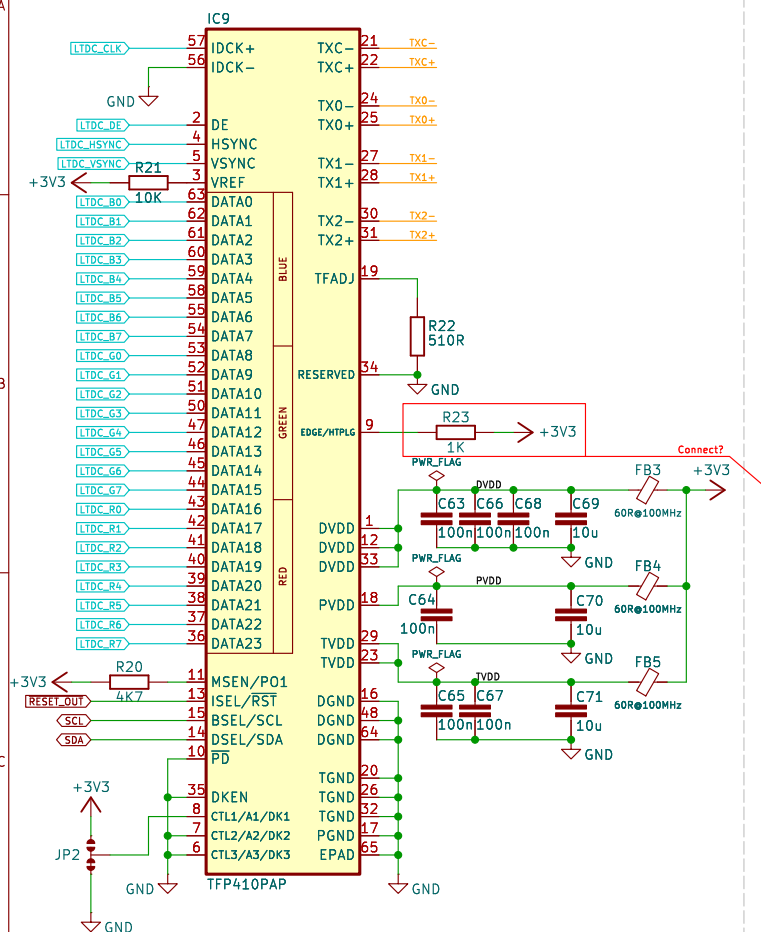

Video MUX 1:2


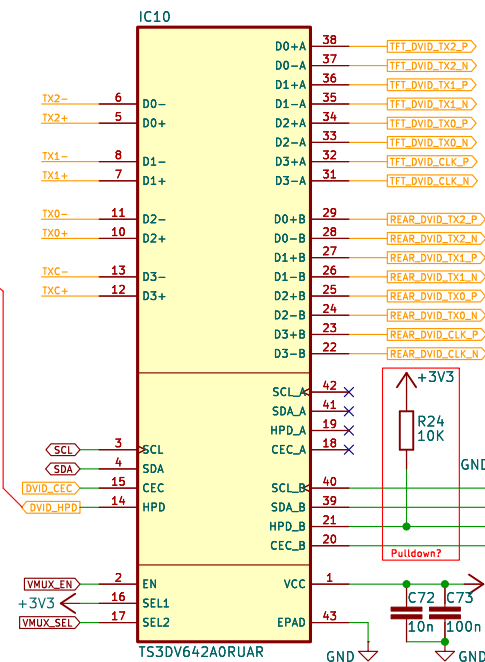



Table 8-1. Functional Table			
EN	SEL1	SEL2	FUNCTION
L	X	X	Switch disabled. All channels are H-Z.
H	L	L	Channel D0+D0- to D0+D0- A is ON. All the other channels (D1+D1-, D2+D2-, D3+D3-, SCL, SDA, HPD, CEC) are H-Z.
H	L	H	Channel D0+D0- to D0+D0- B is ON. All the other channels (D1+D1-, D2+D2-, D3+D3-, SCL, SDA, HPD, CEC) are H-Z.
H	H	L	All A channels are enabled. All B channels are H-Z.
H	H	H	All B channels are enabled. All A channels are H-Z.

NOR flash memory 256 Mbit (32 MB x 8, 200 MHz)

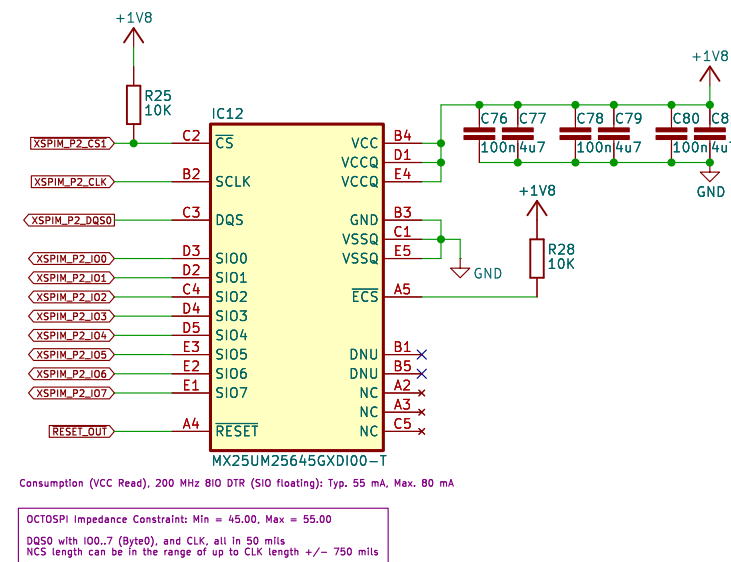

Consumption (VCC Read), 200 MHz 810 DTR (SIO floating): Typ. 55 mA, Max. 80 mA

OCTOSPI Impedance Constraint: Min = 45.00, Max = 55.00
DQ50 with 100.7 (Byte0), and CLK, all in 50 mils
NCS length can be in the range of up to CLK length +/- 750 mils

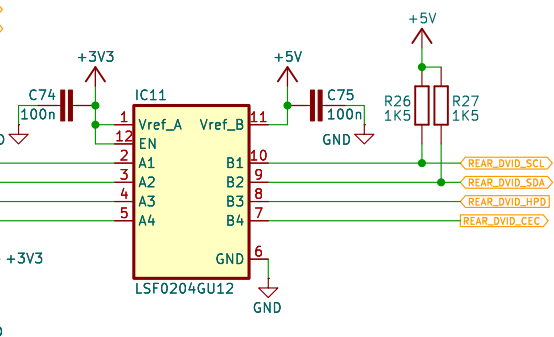

<https://www.envox.eu>
32-bit STM32 MCU module
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
Sheet: /DVID converter, NOR Flash/
File: Ethernet_flash.kicad_sch

Title: EEZ BB3+ STM32H7 CM5 module

Size: A4 Date: 2026-03-28
KiCad E.D.A. 9.0.7

Rev: r1B4
Id: 4/5