



CM5 socket

File: cm5_socket_mcu.kicad_sch

STM32H7 MCU

File: STM32H7_MCU.kicad_sch

Ethernet PHY, PSRAM, eMMC

File: eth_psram_emmc.kicad_sch

DVID converter, NOR Flash

File: Ethernet_flash.kicad_sch




<https://www.envox.eu>
32-bit STM32 MCU module
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.

Sheet: /
File: BB3plus CM5 STM32H7 module.kicad_sch

Title: EEZ BB3+ STM32H7 CM5 module

Size: A4	Date: 2026-04-01	Rev: r1B4
KiCad E.D.A. 9.0.7		Id: 1/5

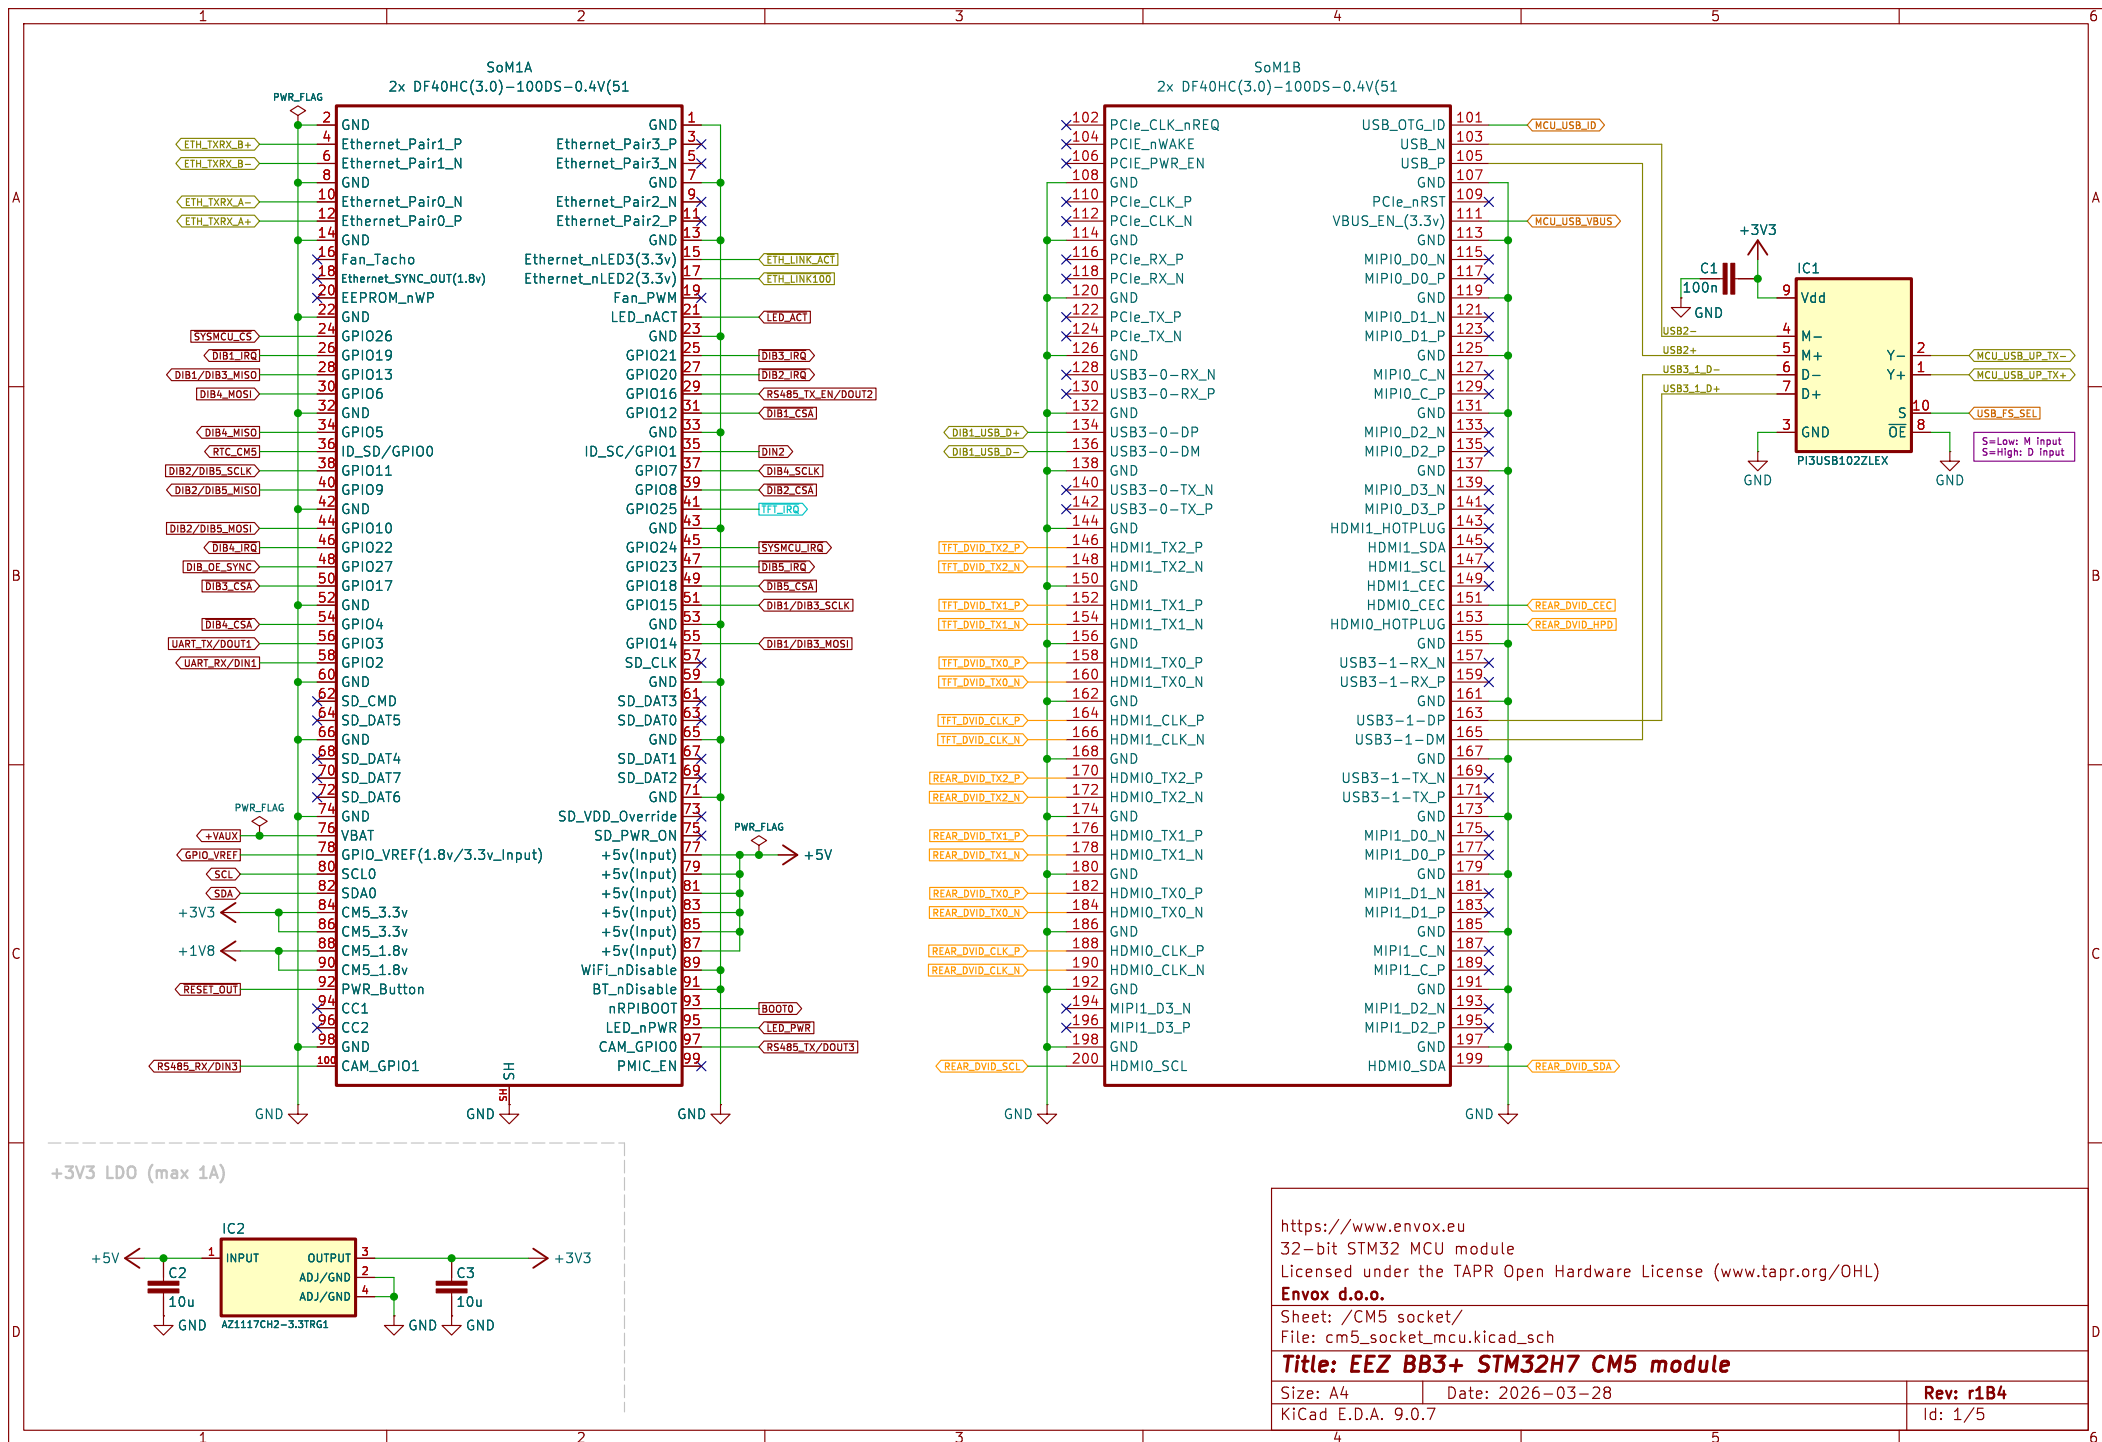

<https://www.envox.eu>
32-bit STM32 MCU module
Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /CM5 socket/

File: cm5_socket_mcu.kicad_sch



Title: EEZ BB3+ STM32H7 CM5 module

Size: A4 Date: 2026-03-28

KiCad E.D.A. 9.0.7

Rev: r1B4




Id: 1/5

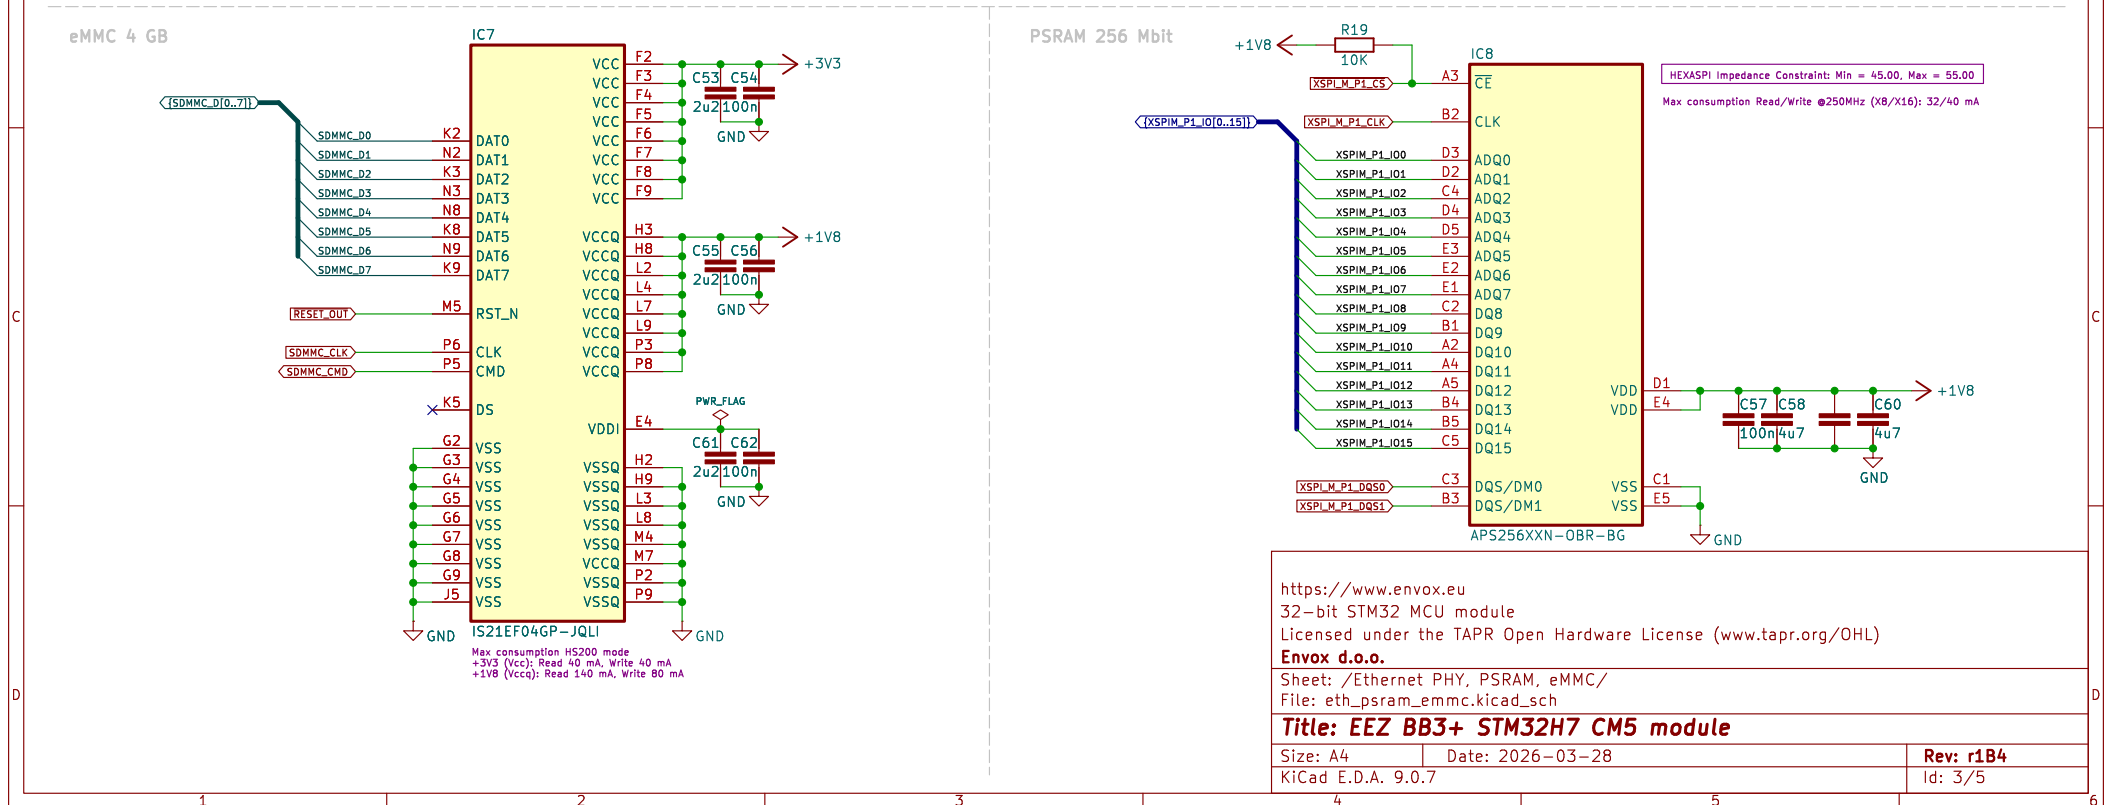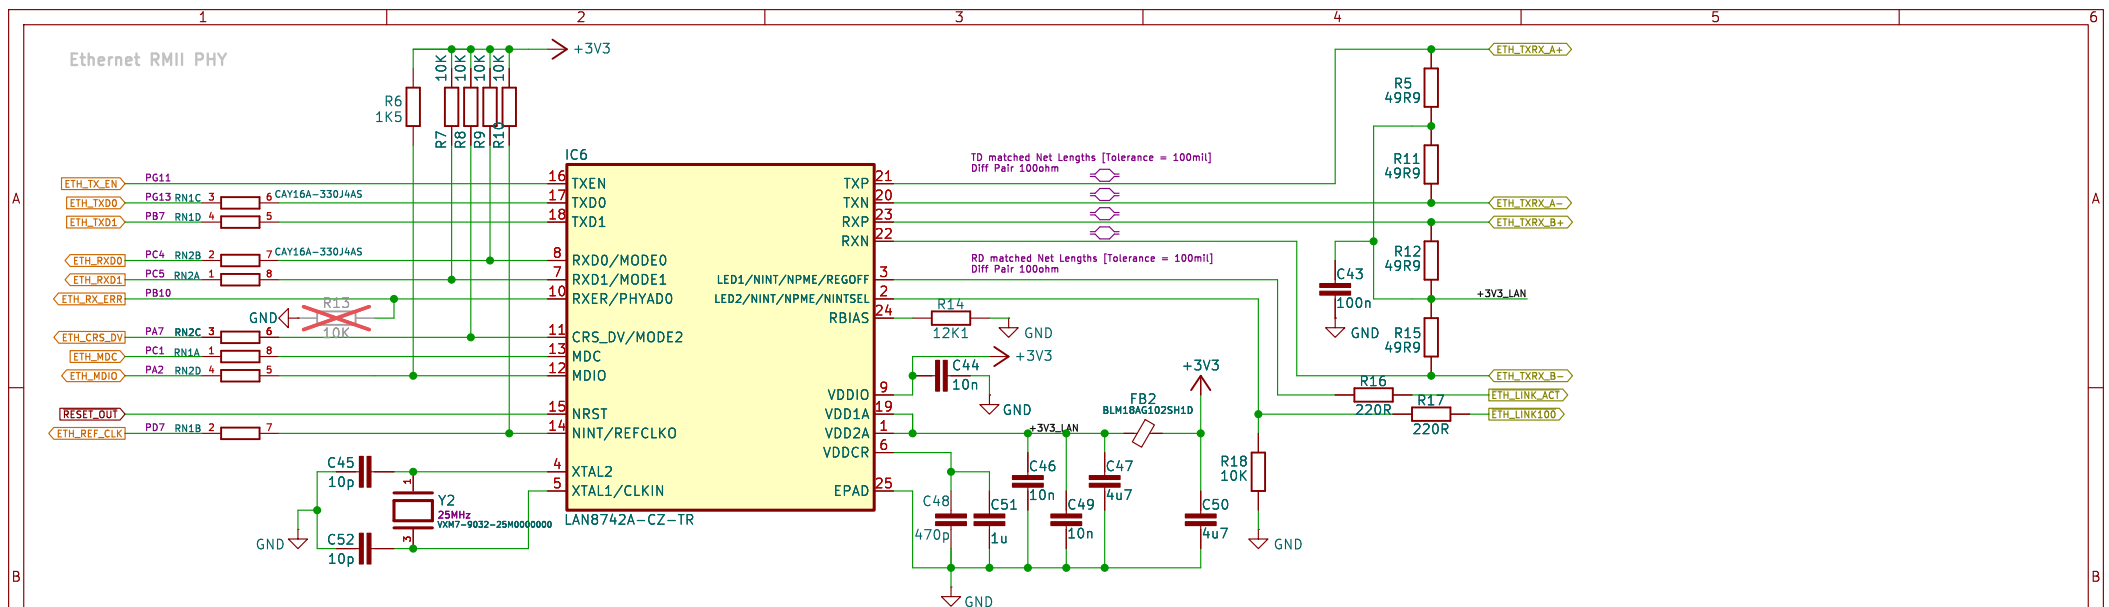

RGB-to-DVID converter

Video MUX 1:2

NOR flash memory 256 Mbit (32 MB x 8, 200 MHz)

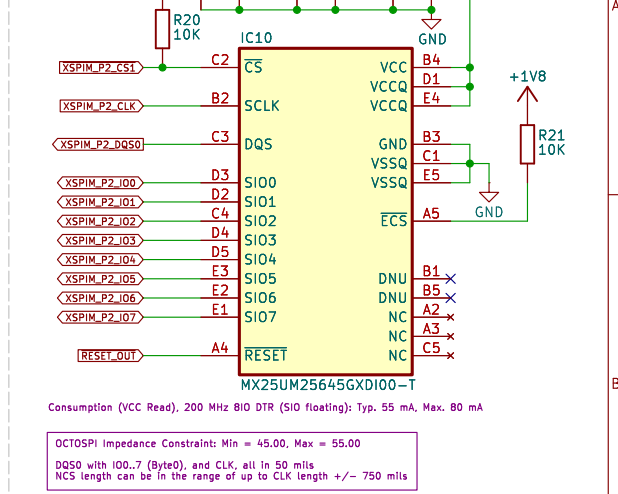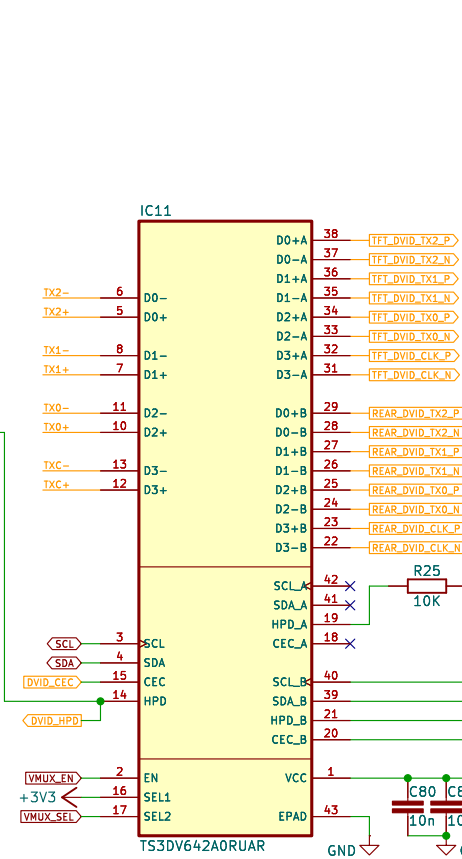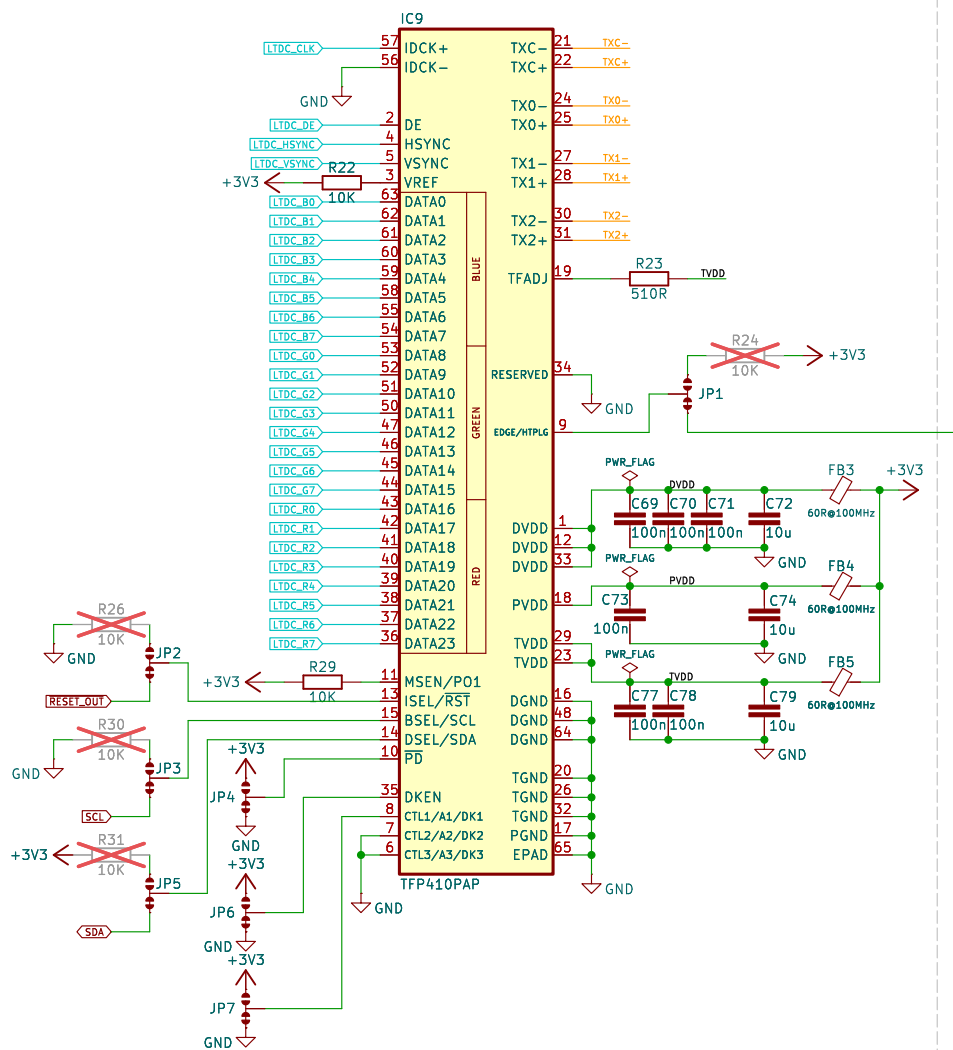

EN	SEL1	SEL2	FUNCTION
L	X	X	Switch disabled. All channels are Hi-Z.
H	L	L	Channel D0+D0- to D0+A0D0- is ON. All the other channels (D1+D1-, D2+D2-, D3+D3-, SCL, SDA, HPD, CEC) are Hi-Z.
H	L	H	Channel D0+D0- to D0+B0D0- is ON. All the other channels (D1+D1-, D2+D2-, D3+D3-, SCL, SDA, HPD, CEC) are Hi-Z.
H	H	L	All A channels are enabled. All B channels are Hi-Z.
H	H	H	All A channels are enabled. All B channels are Hi-Z.

<https://www.envox.eu>
 32-bit STM32 MCU module
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /DVID converter, NOR Flash/
 File: Ethernet_flash.kicad_sch
Title: EEZ BB3+ STM32H7 CM5 module
 Size: A4 Date: 2026-04-01
 KiCad E.D.A. 9.0.7 Rev: r1B4
 Id: 4/5