







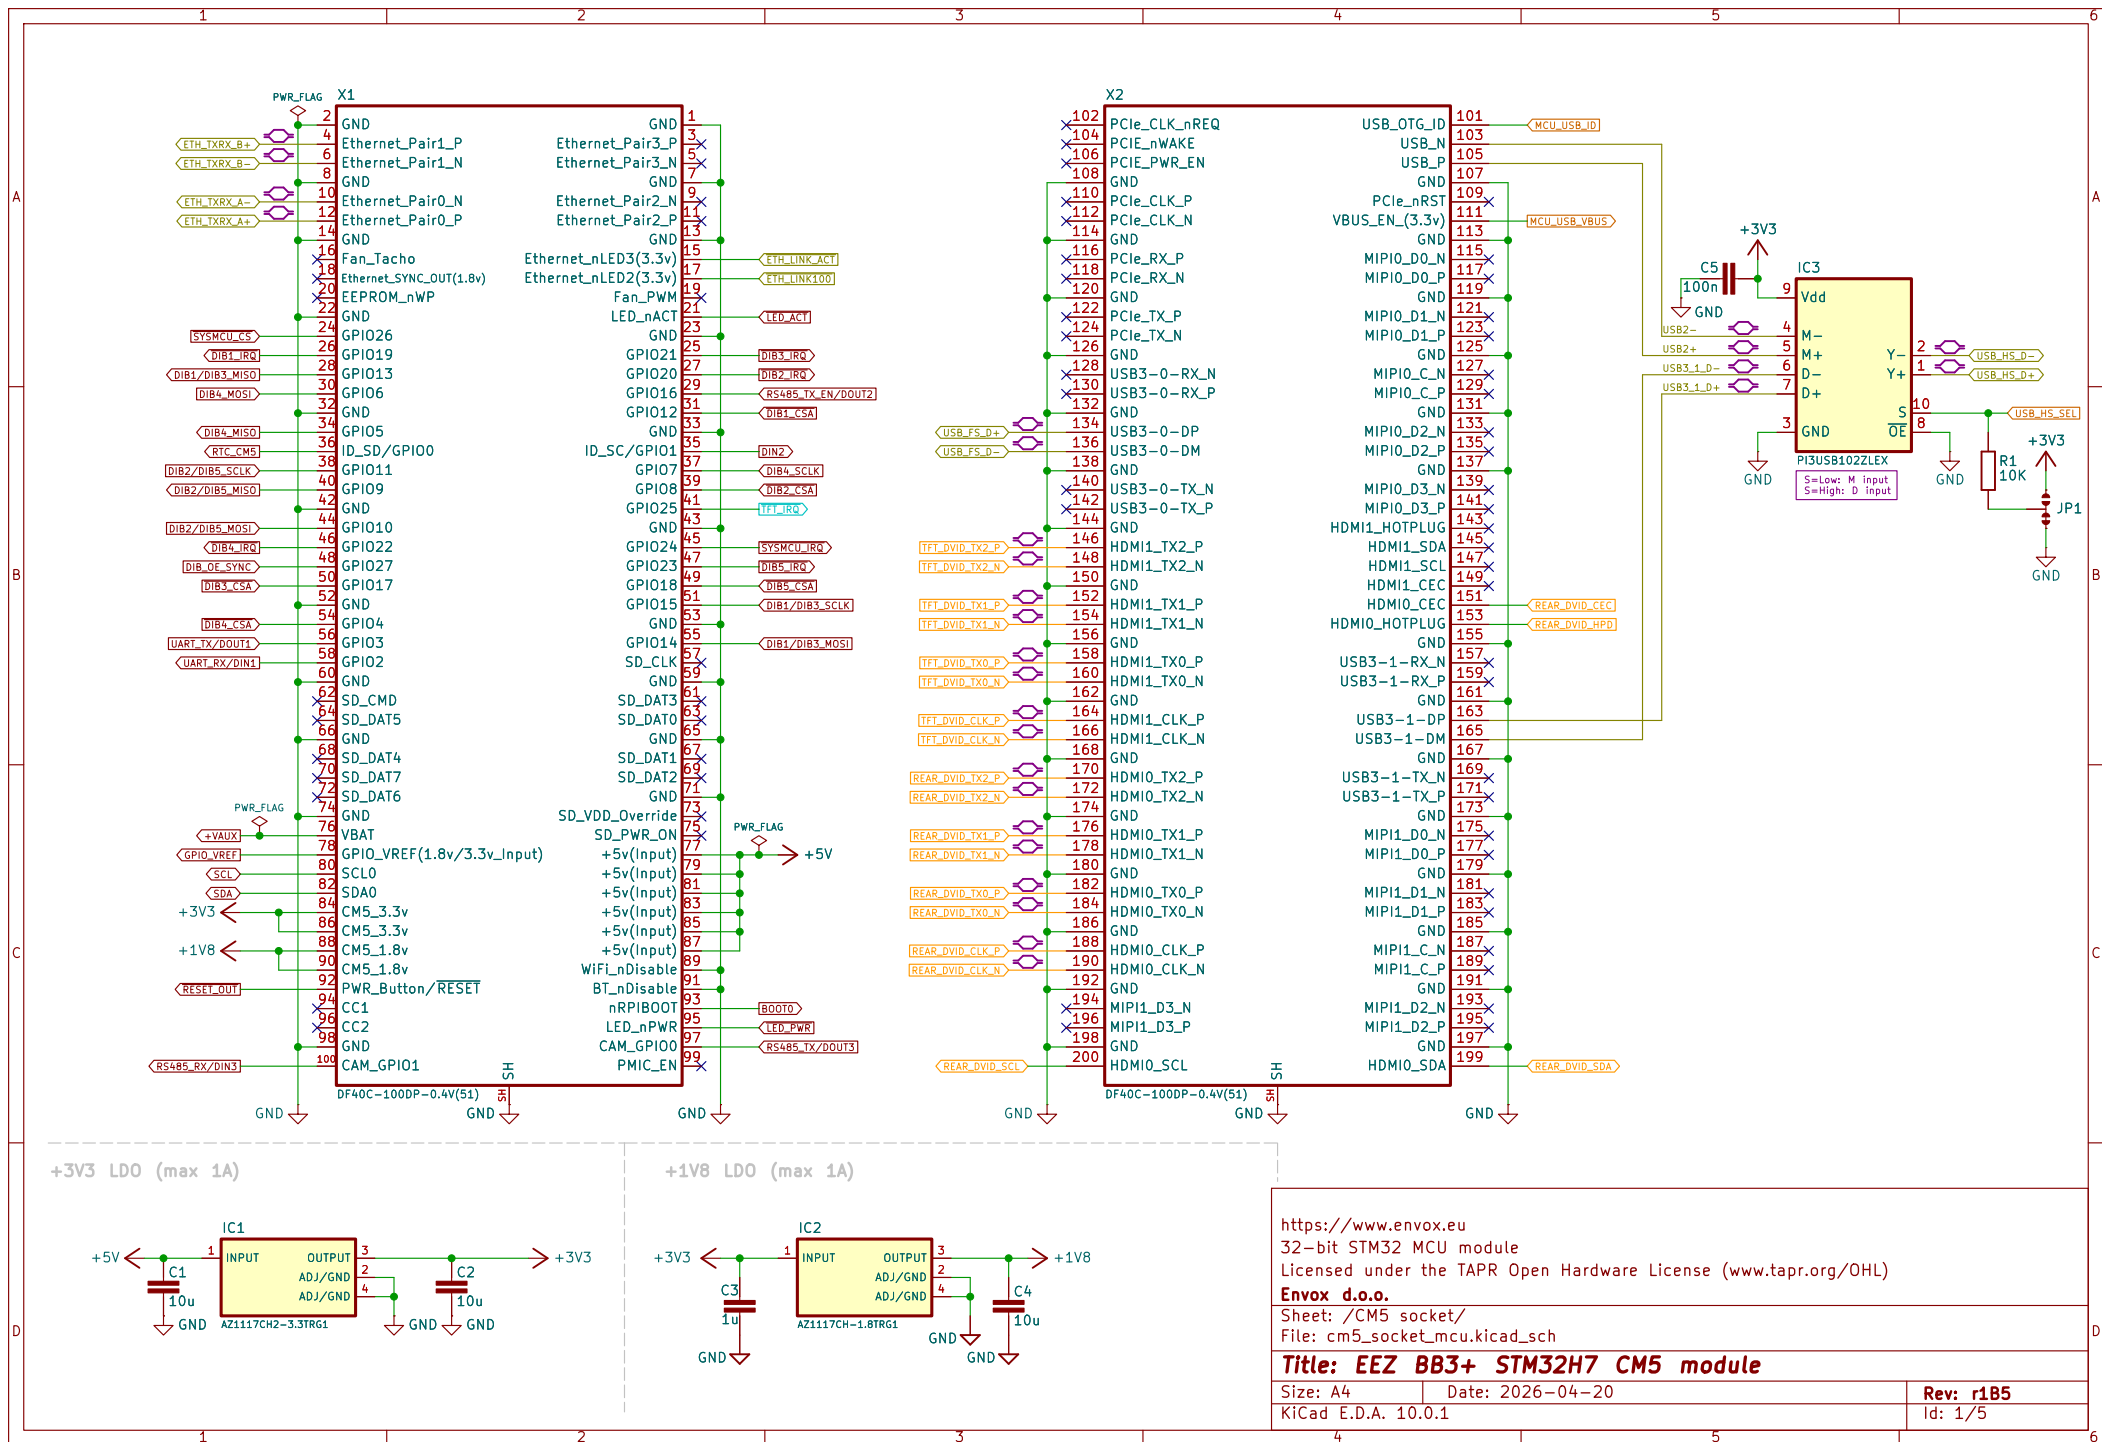

RGB-to-DVID converter

Video MUX 1:2

NOR flash memory 256 Mbit (32 MB x 8, 200 MHz)

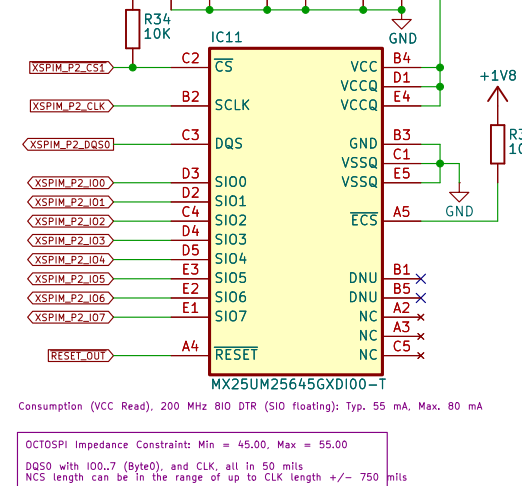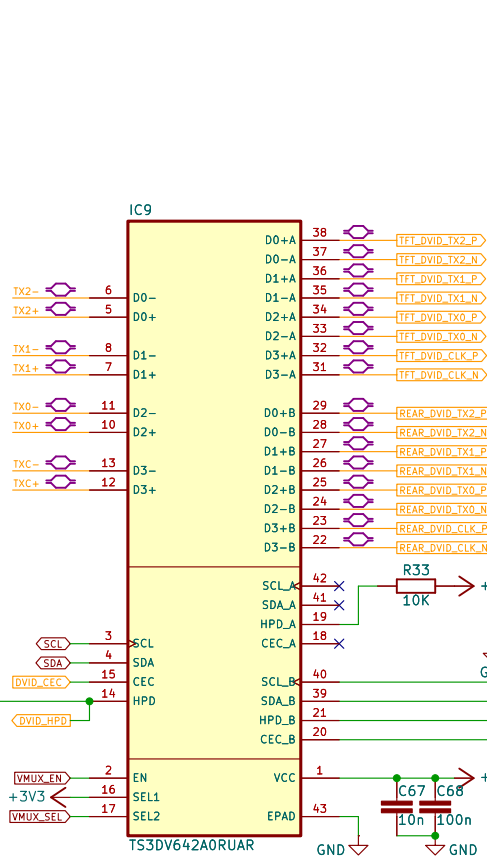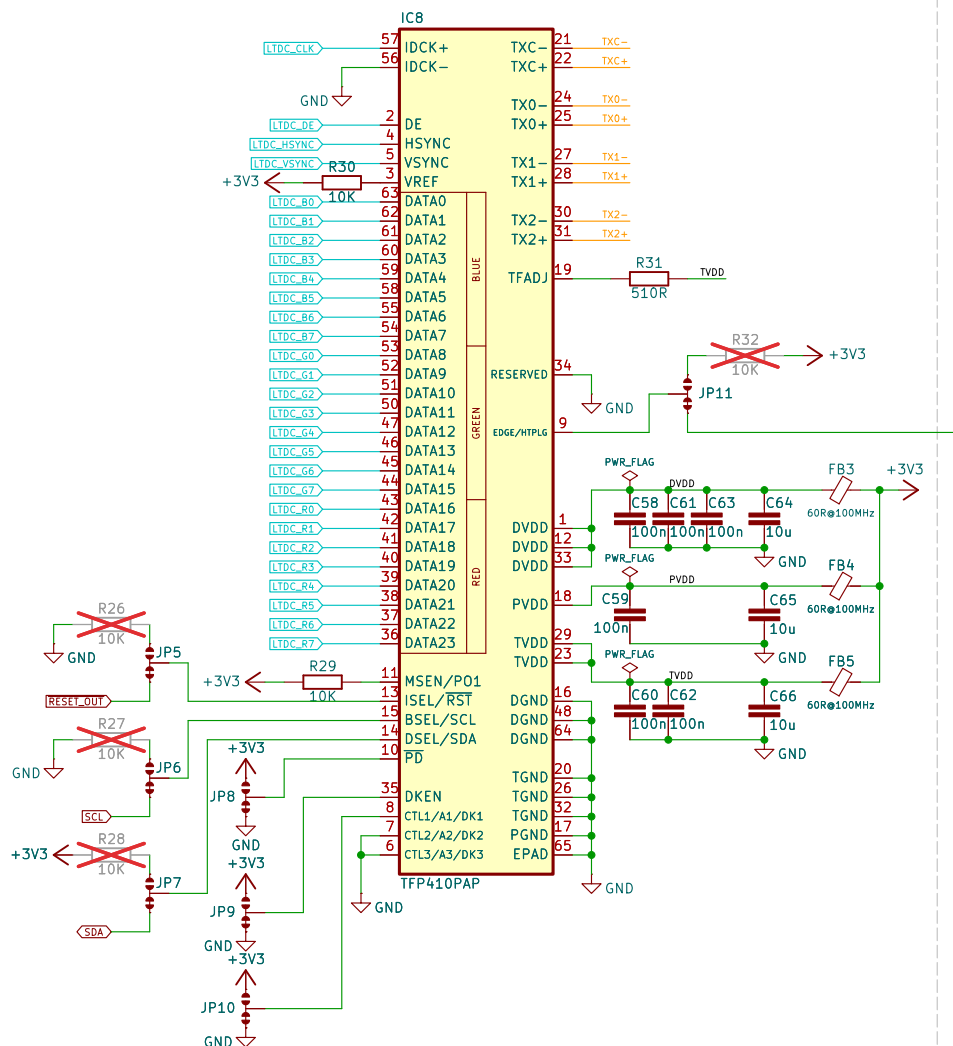

EN	SEL1	SEL2	FUNCTION
L	X	X	Switch disabled. All channels are Hi-Z.
H	L	L	Channel D0+D0- to D0+AD0- is ON. All the other channels (D1+D1-, D2+D2-, D3+D3-, SCL, SDA, HPD, CEC) are Hi-Z.
H	L	H	Channel D0+D0- to D0+AD0- is ON. All the other channels (D1+D1-, D2+D2-, D3+D3-, SCL, SDA, HPD, CEC) are Hi-Z.
H	H	L	All A channels are enabled. All B channels are Hi-Z.
H	H	H	All B channels are enabled. All A channels are Hi-Z.

https://www.envox.eu
 32-bit STM32 MCU module
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /DVID converter, NOR Flash/
 File: Ethernet_flash.kicad_sch

Title: EEZ BB3+ STM32H7 CM5 module

Size: A4 Date: 2026-04-20

KiCad E.D.A. 10.0.1

Rev: r1B5

Id: 4/5