





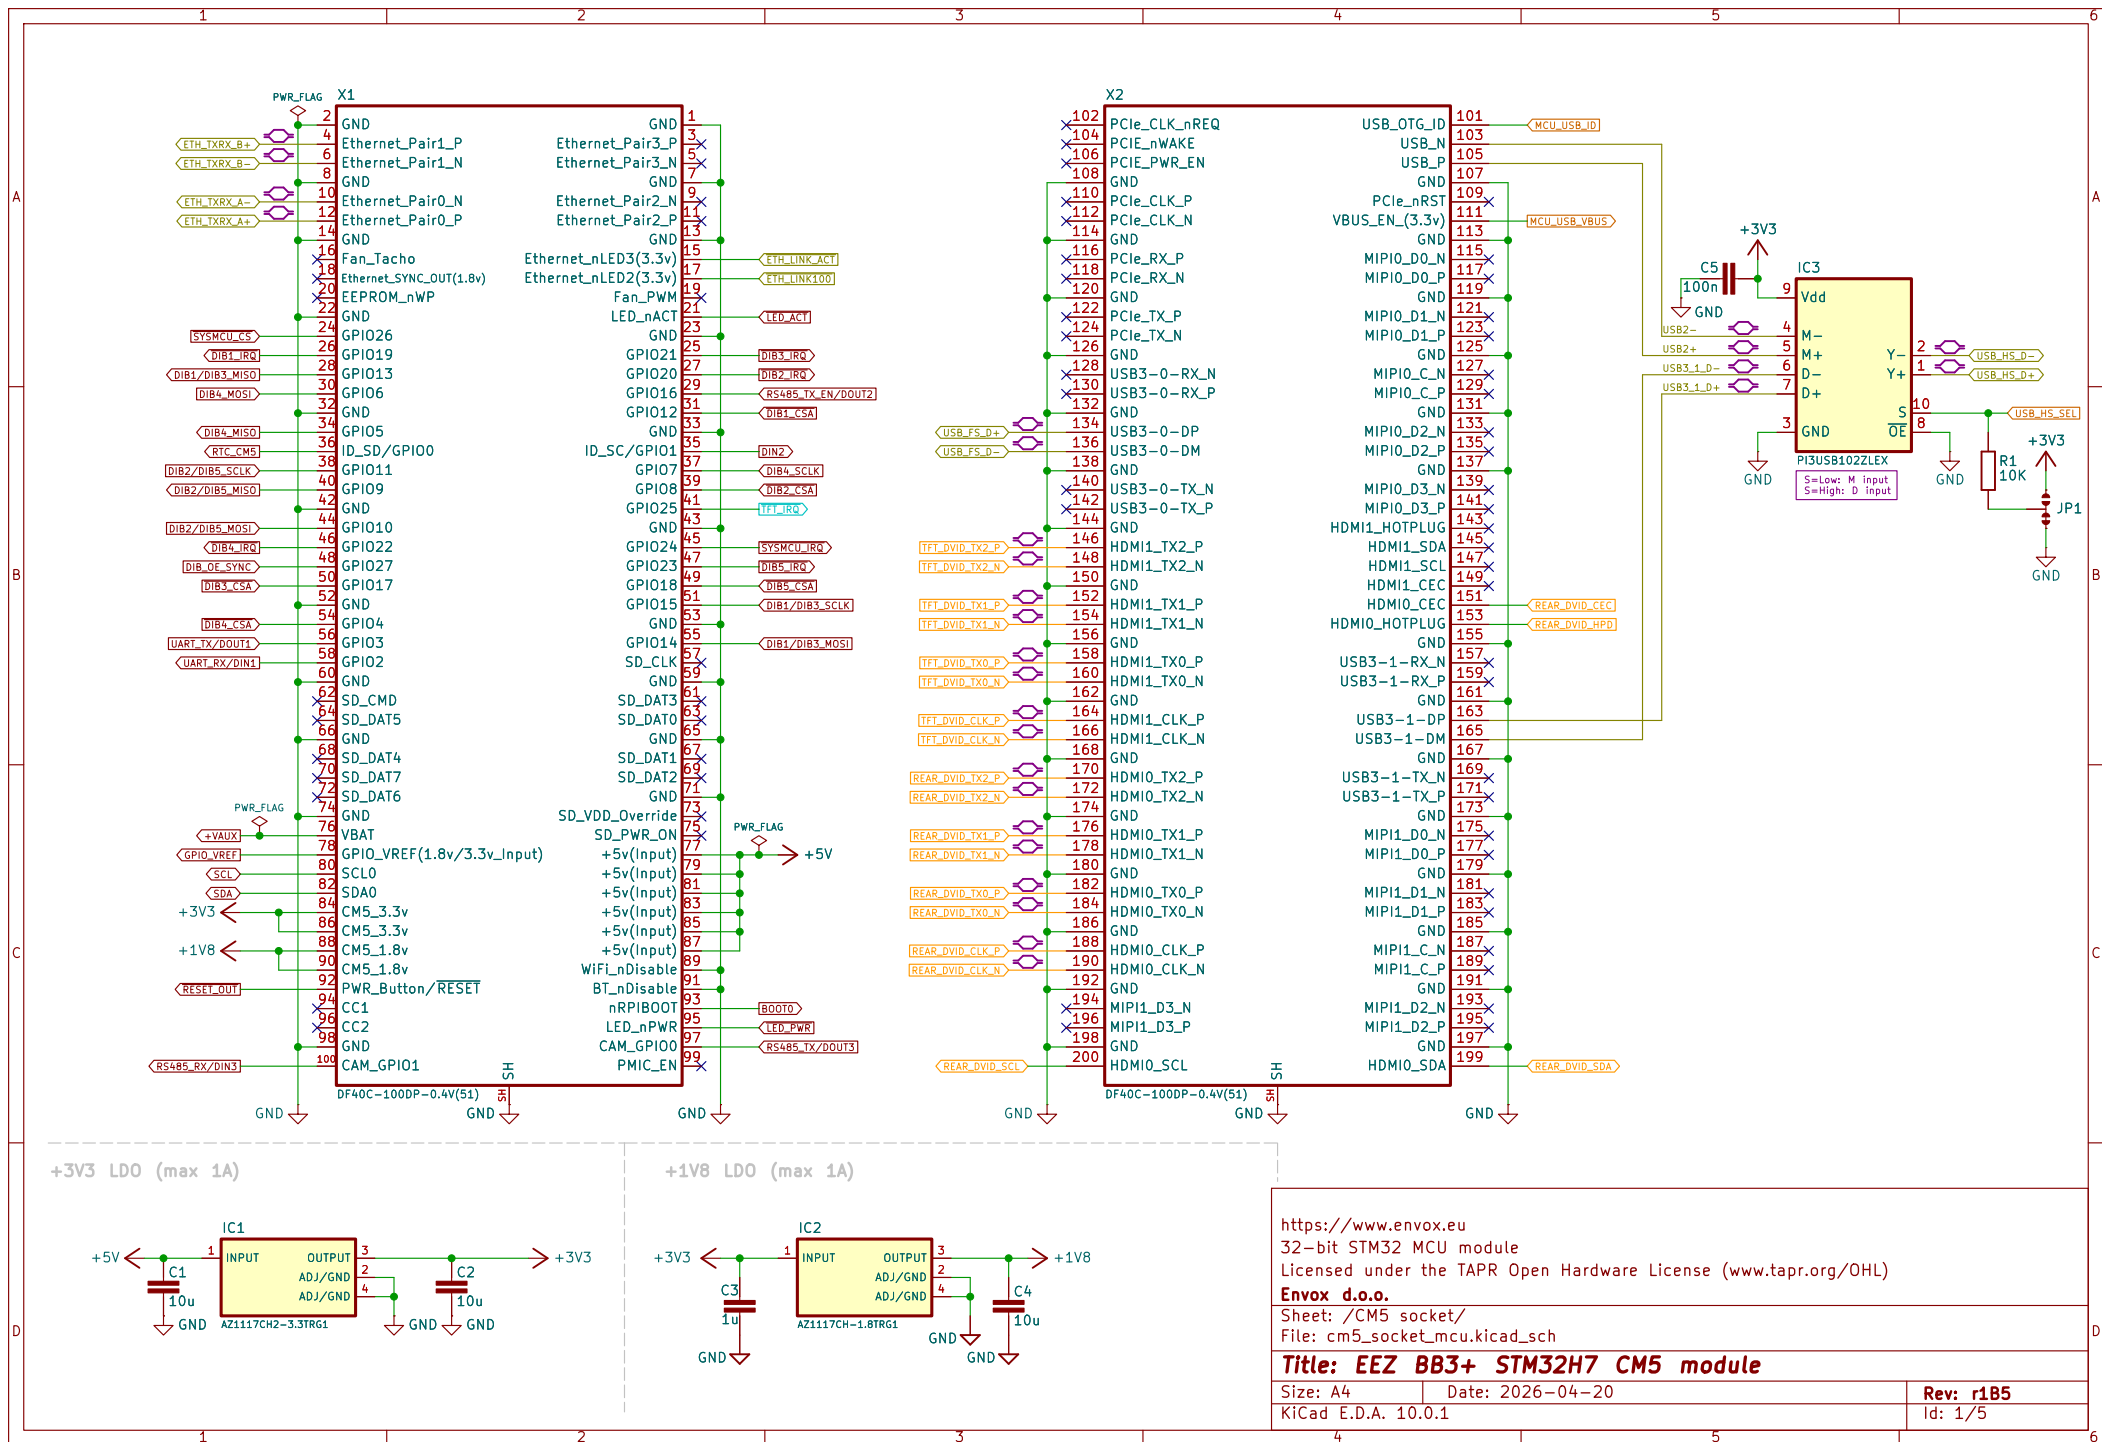


https://www.envox.eu
 32-bit STM32 MCU module
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /CM5 socket/
 File: cm5_socket_mcu.kicad_sch

Title: EEZ BB3+ STM32H7 CM5 module	
Size: A4	Date: 2026-04-20
KiCad E.D.A. 10.0.1	Rev: r1B5 Id: 1/5


32-bit dual core MCU

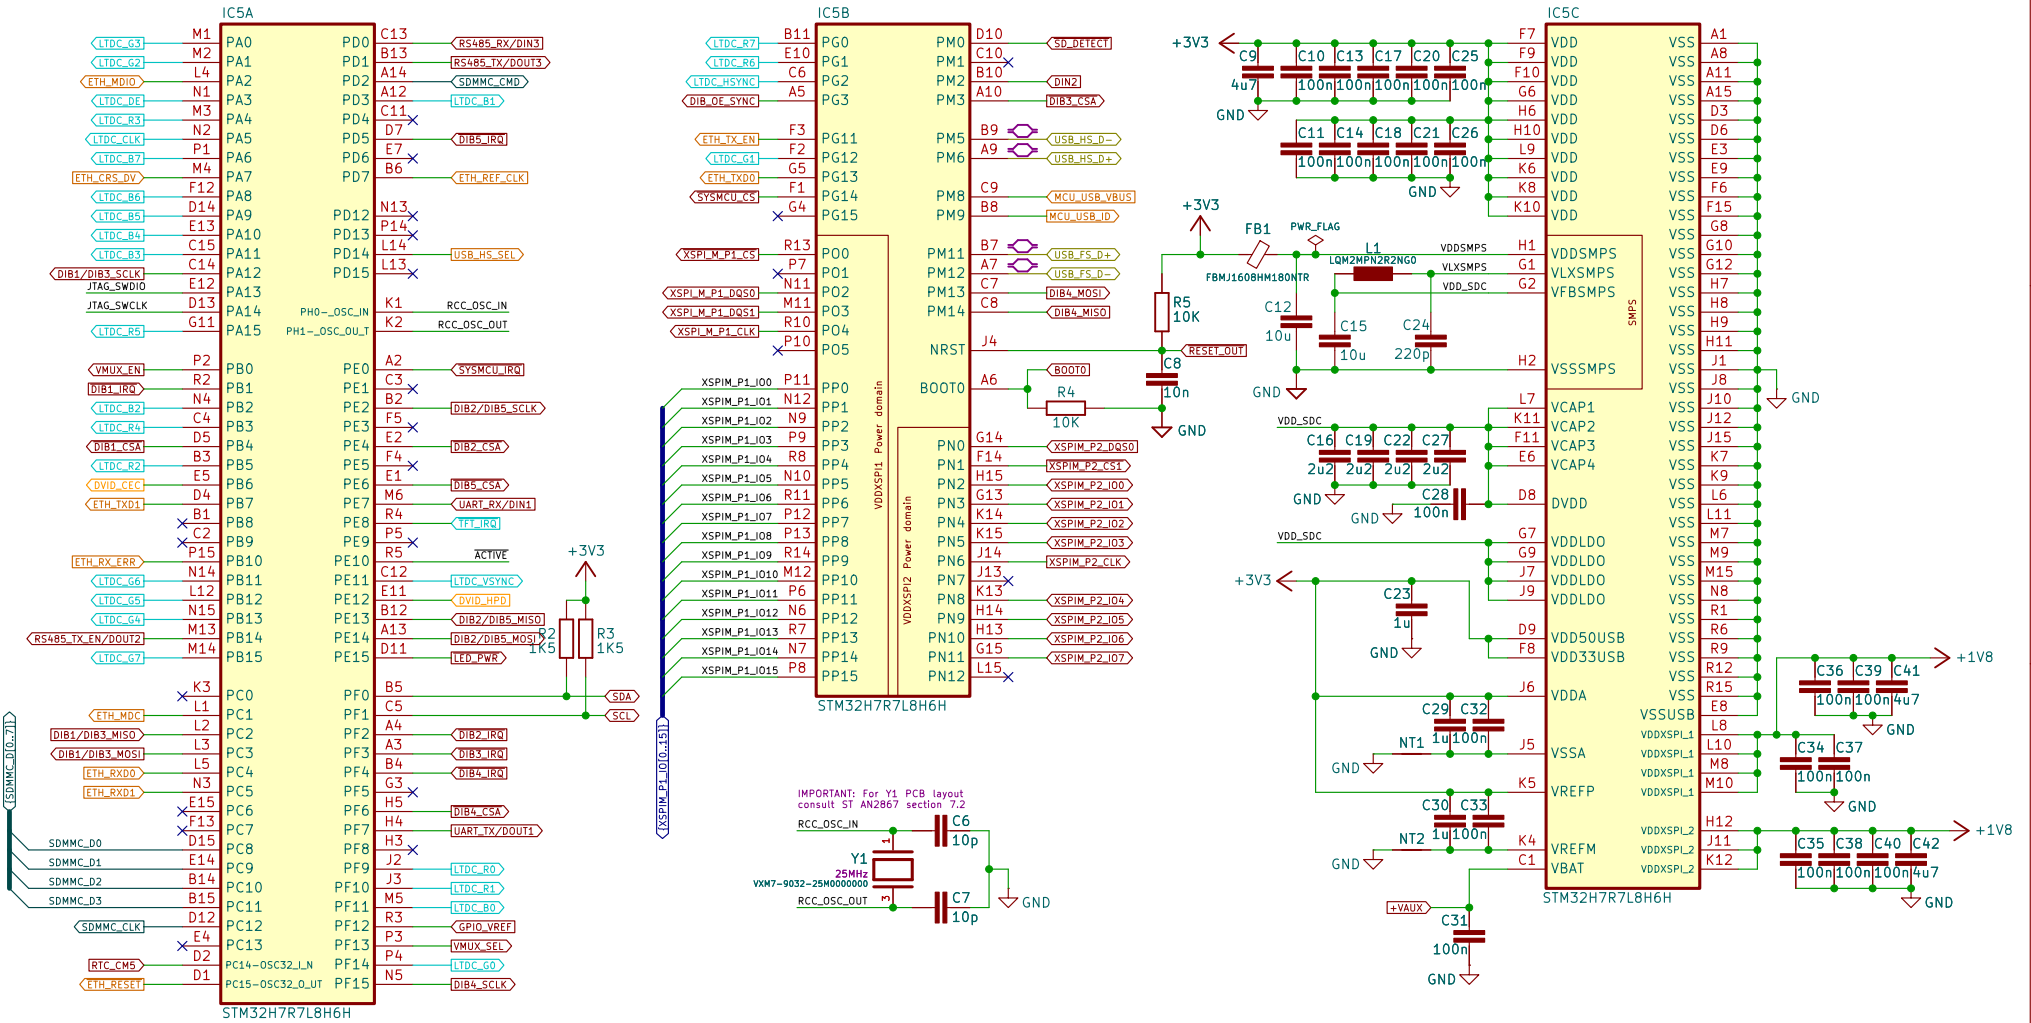

LED Active buffer



JTAG PCB connector

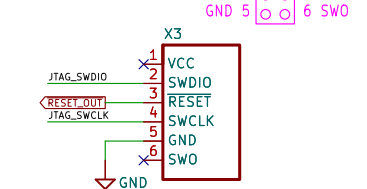


<https://www.envox.eu>
 32-bit STM32 MCU module
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /STM32H7 MCU/
 File: STM32H7_MCU.kicad_sch

Title: EEZ BB3+ STM32H7 CM5 module


Size: A4 Date: 2026-04-20
 KiCad E.D.A. 10.0.1

Rev: r1B5
 Id: 2/5


Ethernet RMII PHY

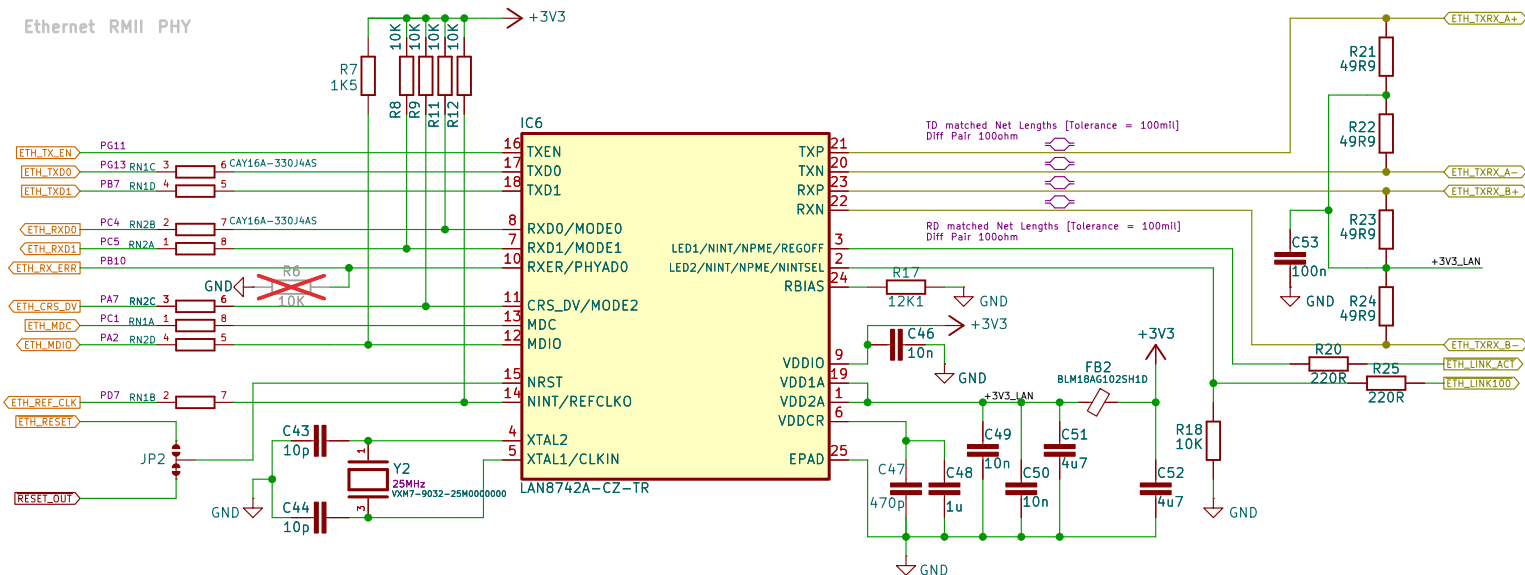

Micro SD card socket

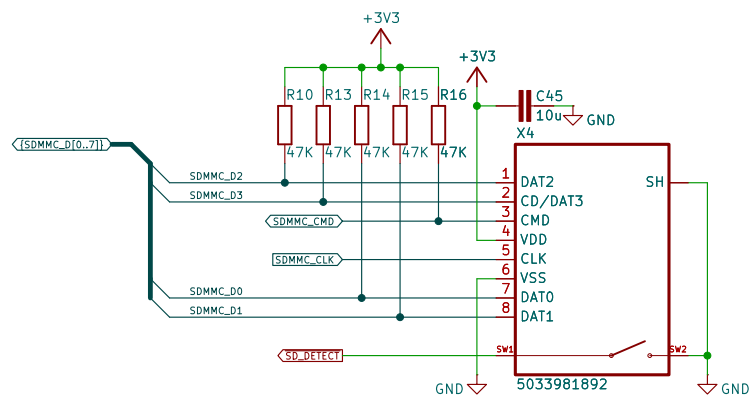

PSRAM 256 Mbit

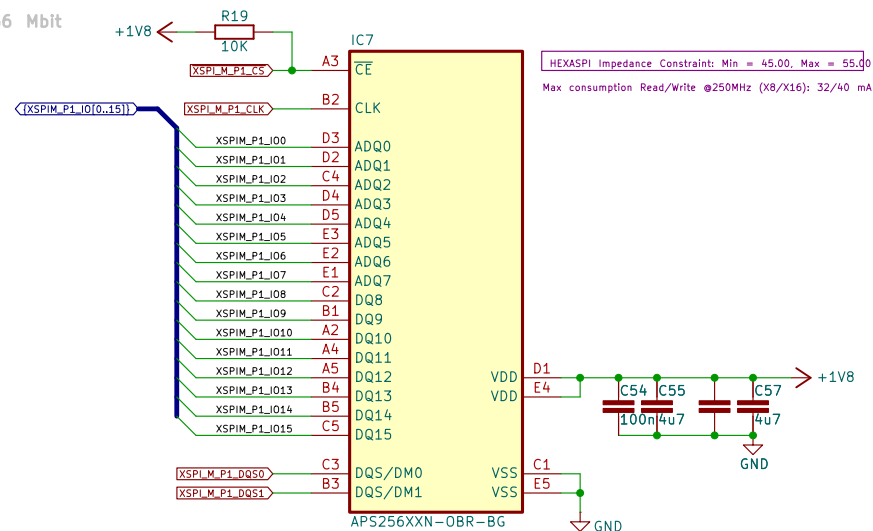


<https://www.envox.eu>
 32-bit STM32 MCU module
 Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)
Envox d.o.o.
 Sheet: /Ethernet PHY, PSRAM, SDcard/
 File: eth_psram_emmc.kicad_sch

Title: EEZ BB3+ STM32H7 CM5 module

Size: A4 | Date: 2026-04-20
 KiCad E.D.A. 10.0.1

Rev: r1B5
 Id: 3/5

RGB-to-DVID converter

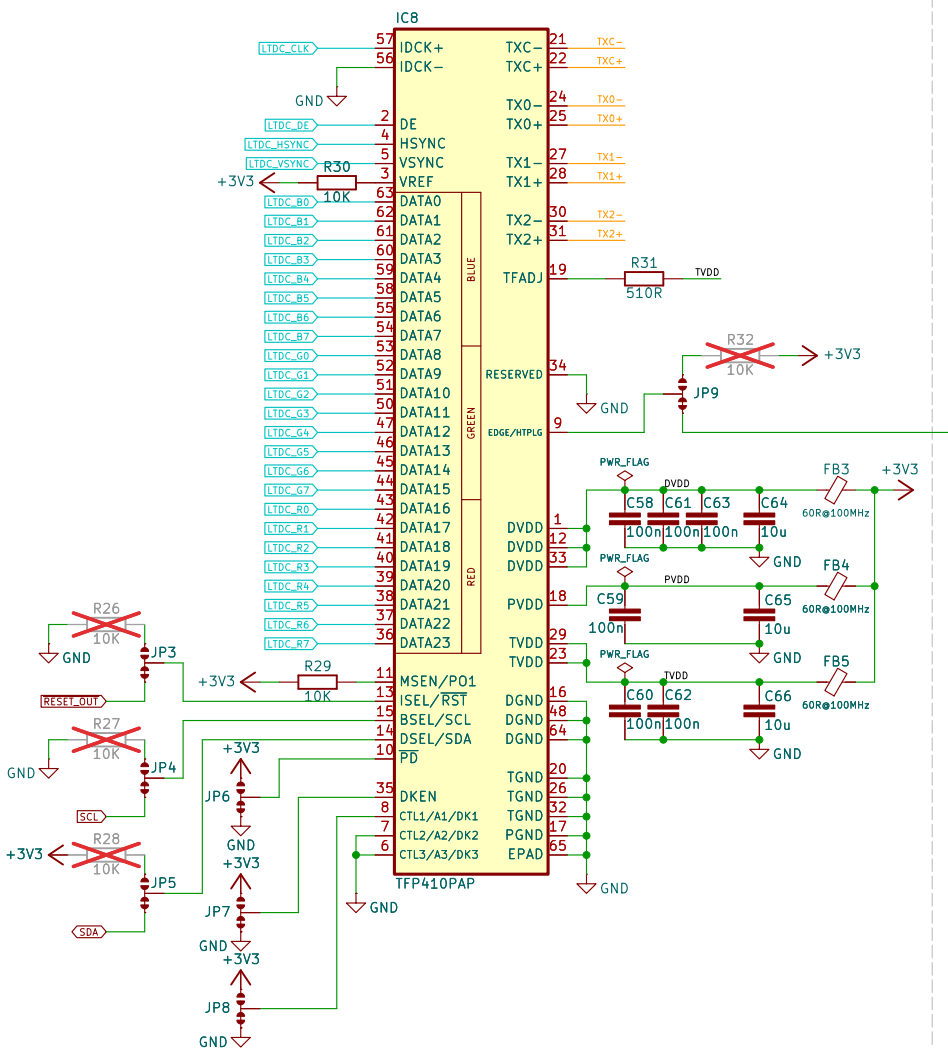

Video MUX 1:2

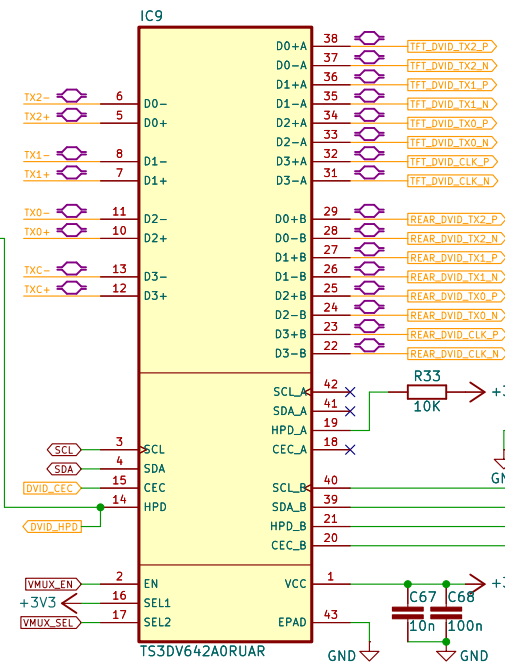


Table 8-1. Functional Table			
EN	SEL1	SEL2	FUNCTION
L	X	X	Switch disabled. All channels are Hi-Z.
H	L	L	Channel D0-D30 to D0-AD0-A is ON. All the other channels (D1-D1, D2-D2, D3-D3, D4-D4, D5-D5, D6-D6, D7-D7, D8-D8, D9-D9, D10-D10, D11-D11, D12-D12, D13-D13, D14-D14, D15-D15, D16-D16, D17-D17, D18-D18, D19-D19, D20-D20, D21-D21, D22-D22, D23-D23, D24-D24, D25-D25, D26-D26, D27-D27, D28-D28, D29-D29, D30-D30) are Hi-Z.
H	L	H	Channel D0-D30 to D0-AD0-A is ON. All the other channels (D1-D1, D2-D2, D3-D3, D4-D4, D5-D5, D6-D6, D7-D7, D8-D8, D9-D9, D10-D10, D11-D11, D12-D12, D13-D13, D14-D14, D15-D15, D16-D16, D17-D17, D18-D18, D19-D19, D20-D20, D21-D21, D22-D22, D23-D23, D24-D24, D25-D25, D26-D26, D27-D27, D28-D28, D29-D29, D30-D30) are Hi-Z.
H	H	L	All A channels are enabled. All B channels are Hi-Z.
H	H	H	All B channels are enabled. All A channels are Hi-Z.

NOR flash memory 256 Mbit (32 MB x 8, 200 MHz)

