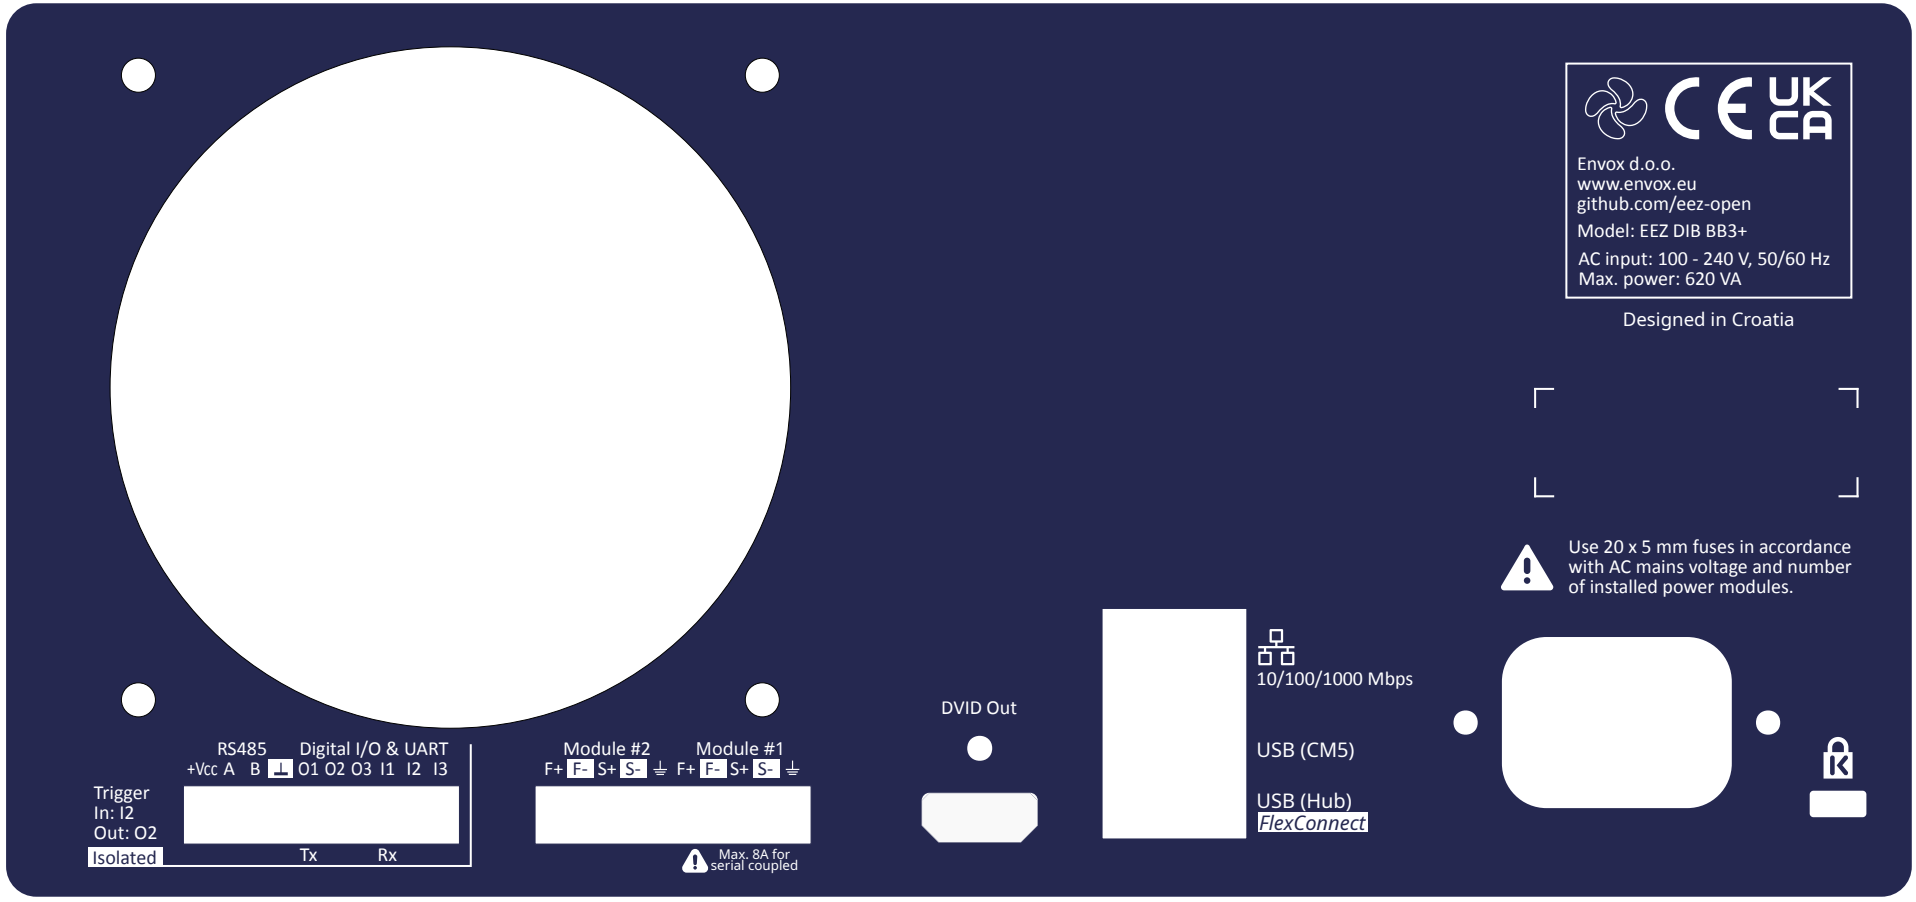
Envox d.o.o.
www.envox.eu
github.com/eez-open
Model: EEZ DIB BB3+
AC input: 100 - 240 V, 50/60 Hz
Max. power: 620 VA
Designed in Croatia
Use 20 x 5 mm fuses in accordance with AC mains voltage and number of installed power modules.
RS485
+Vcc A B
Digital I/O & UART
O1 O2 O3 I1 I2 I3
Trigger
In: I2
Out: O2
Isolated
Tx Rx
Module #2
F+ F- S+ S-
Module #1
F+ F- S+ S-
Max. 8A for serial coupled
DVID Out
10/100/1000 Mbps
USB (CM5)
USB (Hub)
FlexConnect