



The System MCU is programmed so that the Master MCU first simultaneously activates DIB4_CSA and DIB5_CSA (active LOW) and then simultaneously activates DIB2_CSA and DIB3_CSA which will reset the System MCU and put it into bootloader mode. Simultaneous activation of two CSA (Chip Select) signals on the same SPI channel should never occur in normal operation. 100K pullup resistors ensure that RESET and BOOT0 are inactive if the Master MCU is not installed.


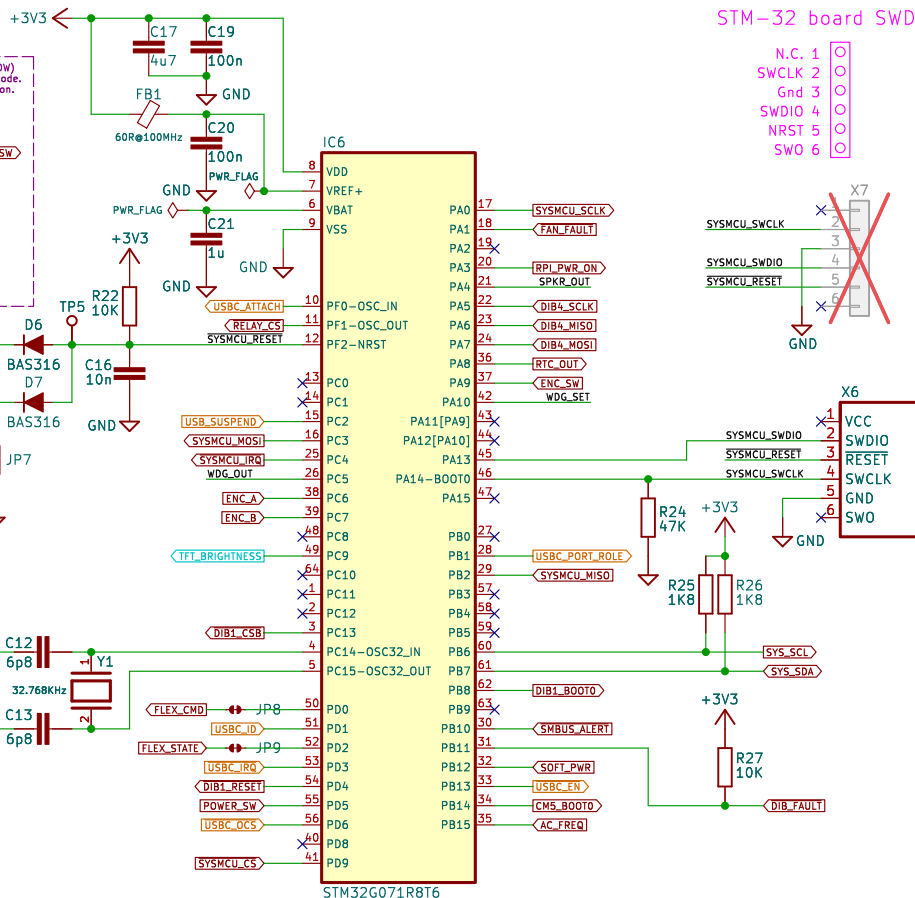


N.C.	1	
SWCLK	2	
Gnd	3	
SWDIO	4	
NRST	5	
SWO	6	


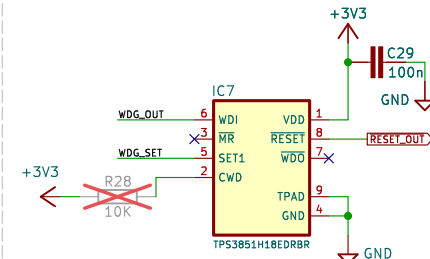


Id: 3/6

USB-C 3.0 front port (source max 1.5A)

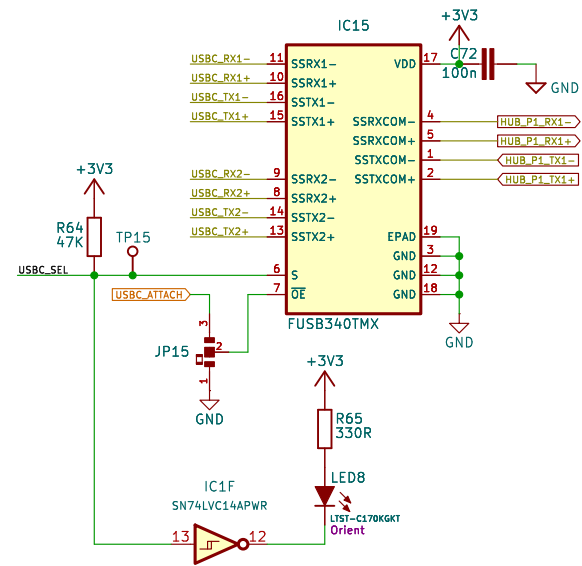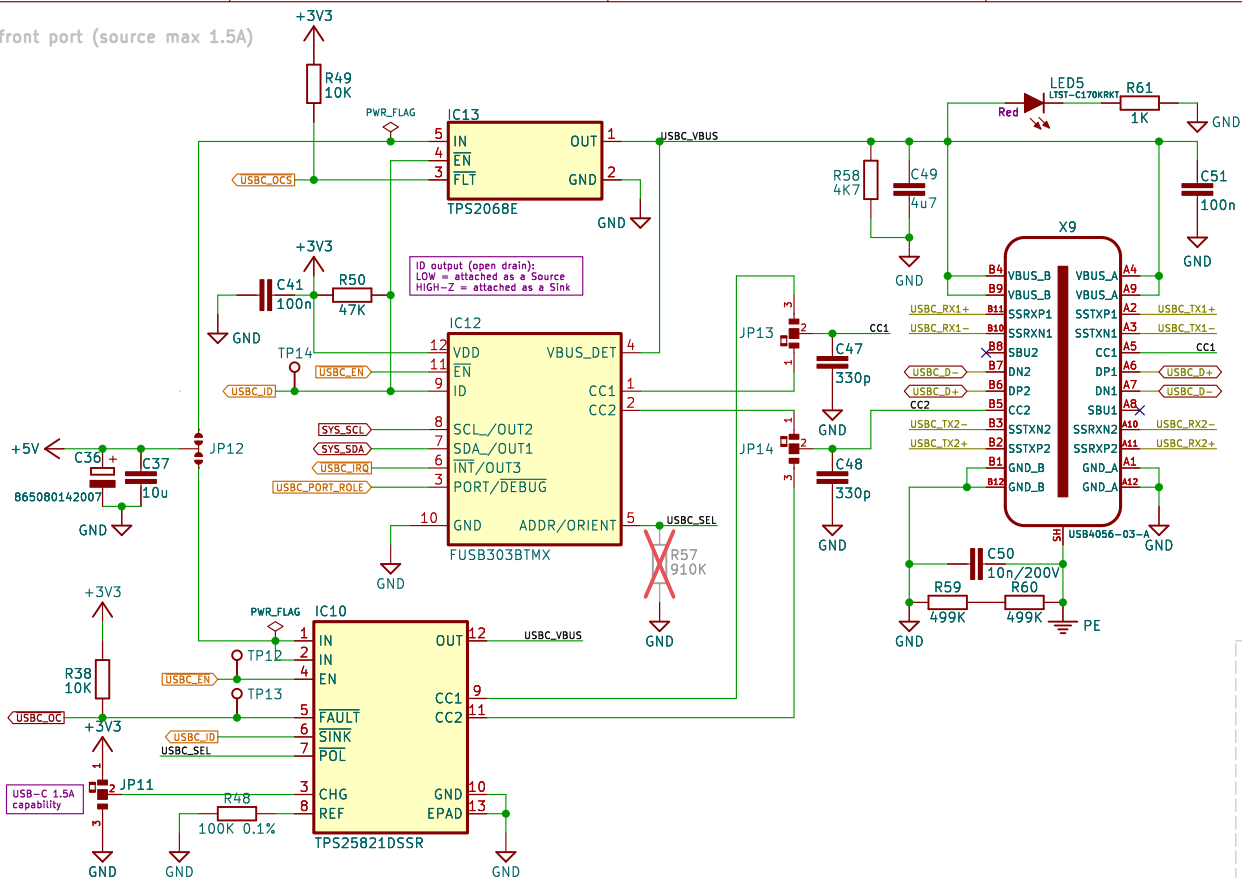

12V DC Fan speed controllers

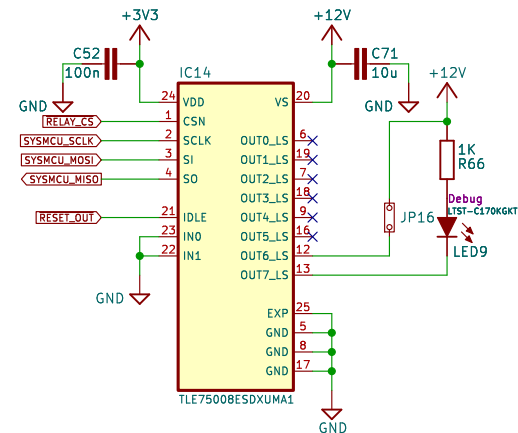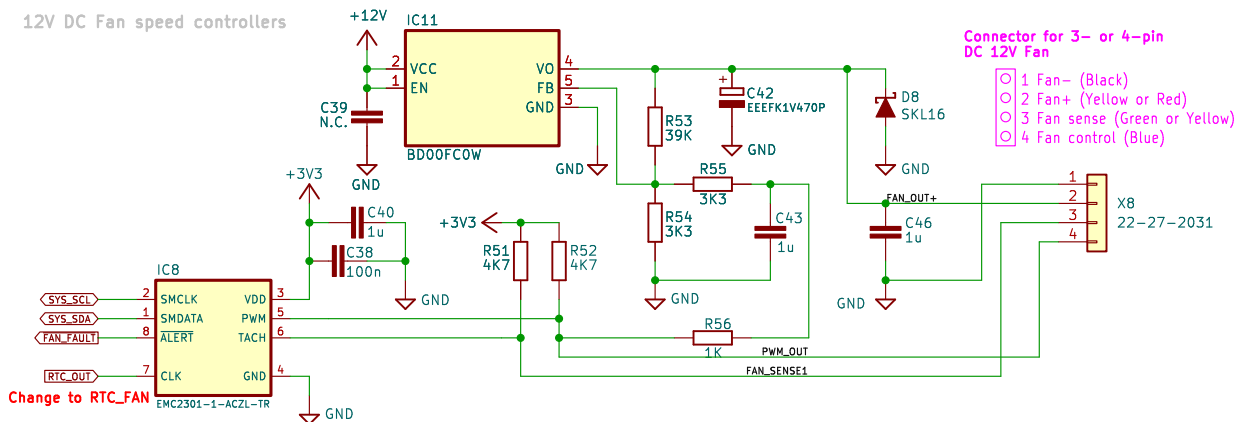

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /USB-C socket, Mux, CC/

File: usbc.kicad_sch






Title: BB3+ mainboard

Size: A4 Date: 2026-01-04

KiCad E.D.A. 9.0.7

Rev: r1B1

Id: 6/6

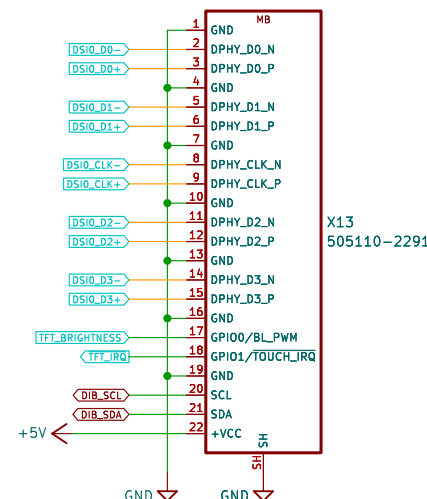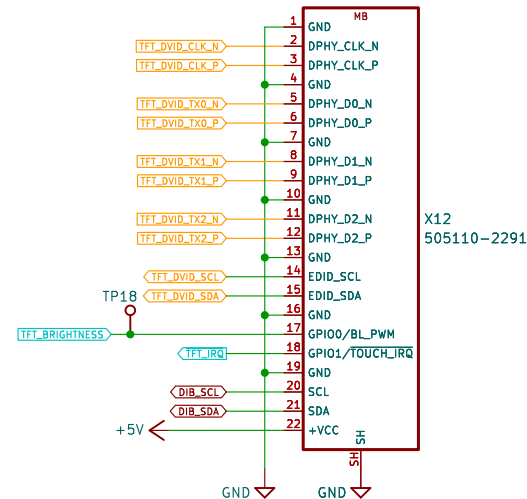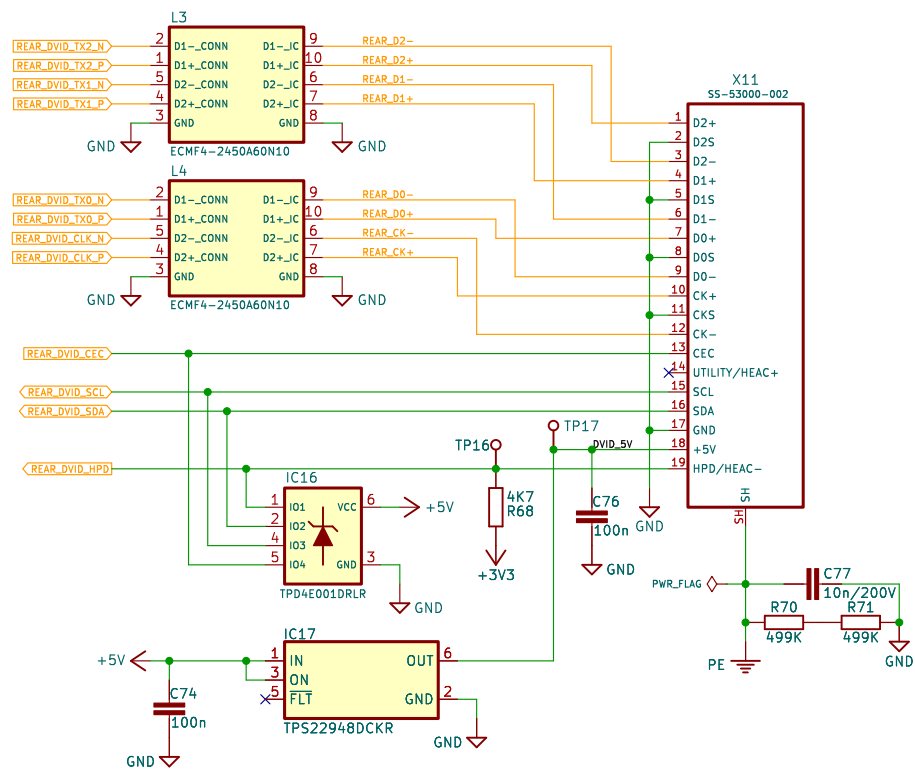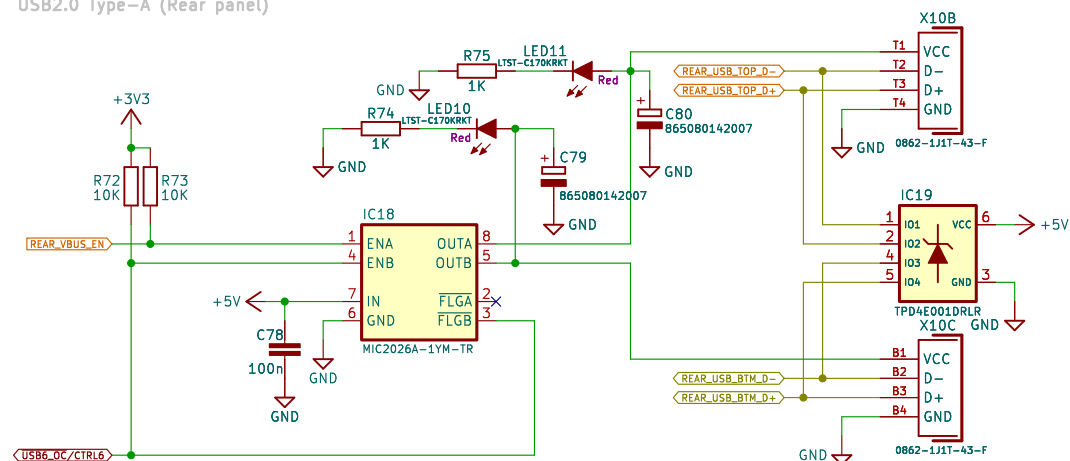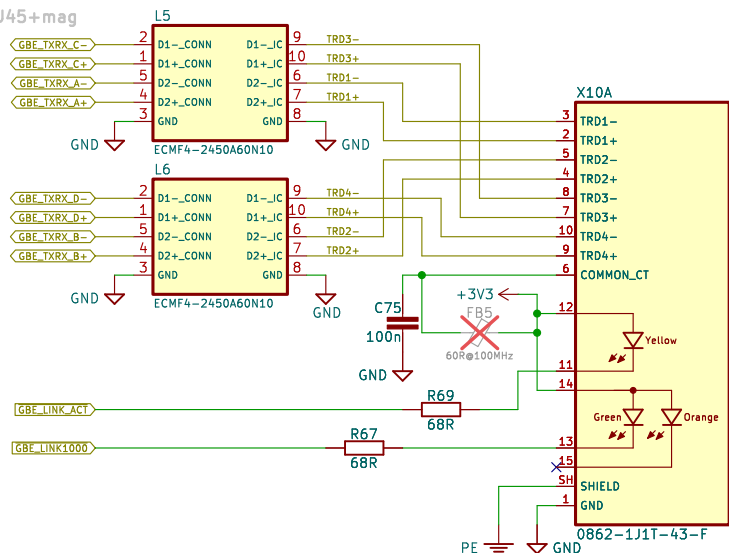

<https://github.com/eez-open/eez-bb3plus>

More info at <http://www.envox.eu/>

Licensed under the TAPR Open Hardware License (www.tapr.org/OHL)

Envox d.o.o.

Sheet: /Ext video, Ethernet, Rear USB, TFT/

File: ext_video.kicad_sch

Title: BB3+ mainboard

Size: A4

Date: 2026-01-04

KiCad E.D.A. 9.0.7

Rev: r1B1

Id: 7/6