




TIMER 1 – VARIABLE–SPEED ASTABLE

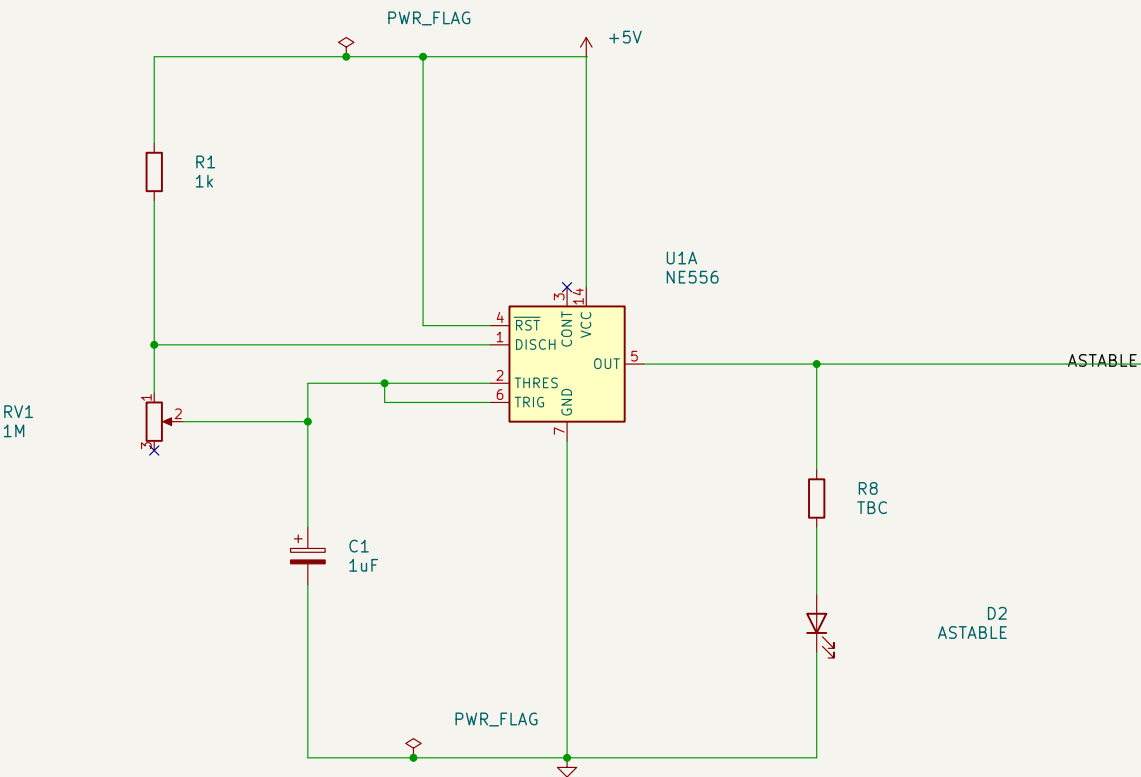

TIMER 2 – MANUAL STEP

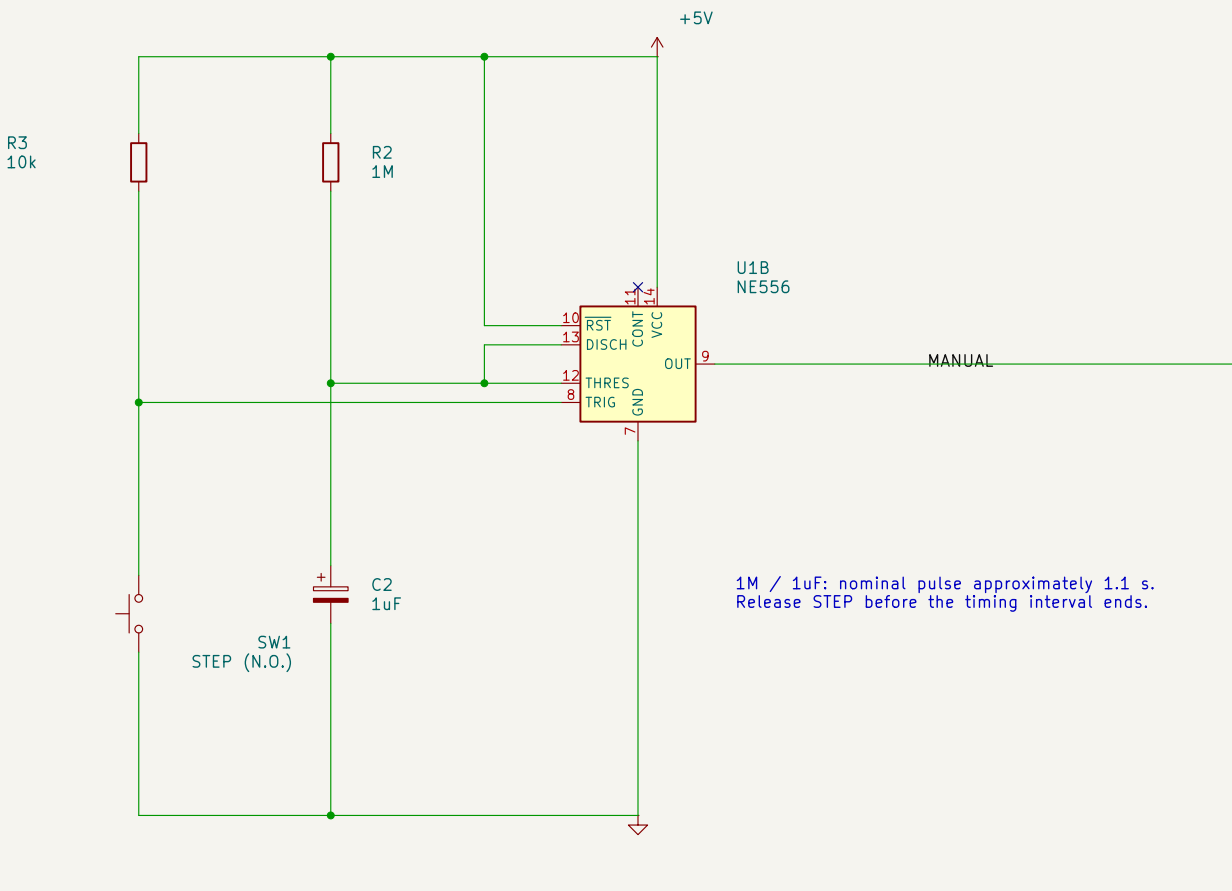

SN7400 A/B – RUN / MANUAL LATCH

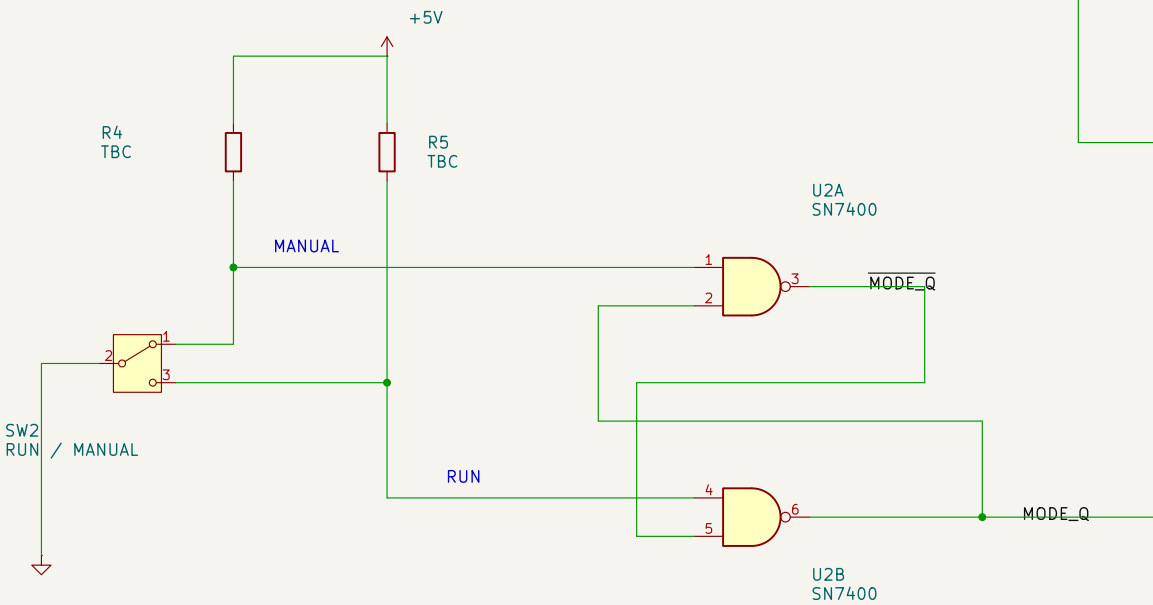

Ground pin 1: MANUAL. Ground pin 4: RUN.
R4/R5 values and switch physical terminal mapping: TBC.

TBC = unknown; confirm before building.
U1 pins 3/11 open; RV1 unused end shown open.
D2 return to GND provisional; R7/R8 unknown.
C3–C5 bypass provisions: fitted parts/values TBC.
U3 unused inputs shown grounded: confirm as built.

SN7400 C/D – HLT / CPU CLOCK

