
NOVIBRASYON
MARINE ENGINE MOUNTS

PRODUCT CATALOGUE
2026

Marine engine mounts.

Feel the quality. Enjoy the silence.

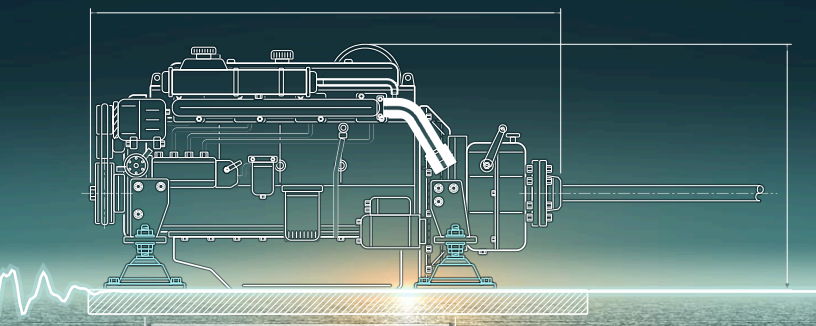

Engine mounts for Yanmar · Cummins · Caterpillar · Volvo Penta · MAN · Perkins

www.novibrasyon.com **WhatsApp +90 530 780 19 95**



WELCOME TO NOVIBRASYON MARIN

Feel the quality. Enjoy the silence.

Novibrasyon Marin produces marine engine mounts and shaft bearings in Istanbul and ships them worldwide. Every mount in this catalogue is made to reduce engine vibration and noise, help keep the engine in line, and stand up to salt water and long hours at sea.

Less vibration

Bonded rubber elements absorb engine vibration before it reaches the hull.

Built for salt water
Galvanized steel, 316 stainless steel and marine-grade aluminum bodies.

2–4 business days
FedEx or UPS Express, insured and tracked. Depends on destination and customs.

FIND IT FAST

How a mount works Technical introduction →

Engine finder Look up your engine →

Part number finder Your old mount →

How to order Three simple steps →

IN THIS CATALOGUE

01 Yanmar Engine Mounts →

02 Saildrive Mounts →

03 Cummins Engine Mounts →


04 Universal Mounts →

Shaft bearings →

TECHNICAL INTRODUCTION

From vibration to silence.

A diesel engine shakes with every firing stroke. An engine mount is a rubber spring between the engine and the hull: it carries the weight of the engine and gearbox, keeps the shaft in line and stops most of the vibration before it reaches the boat.

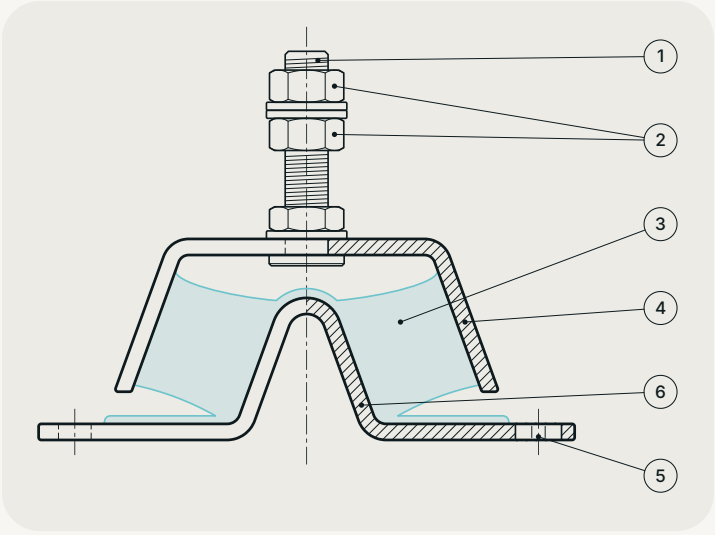

INSIDE A NOVIBRASYON MOUNT

1. **Stud**
   Carries the engine foot.
2. **Adjusting nuts**
   Set the engine height for shaft alignment.
3. **Rubber element**
   Absorbs the vibration. Its hardness is given in Shore.
4. **Metal housing**
   Holds the rubber and takes the load.
5. **Base flange**
   Bolted to the engine bed.
6. **Centre core**
   The raised centre of the base plate, bonded into the rubber.

TECHNICAL INTRODUCTION

Choosing the right mount.

Four things decide which mount is right for your engine.

1 **Engine model**

Find your engine in the engine finder. It shows the right mount for your engine.

2 **Load at each mount**

Engine and gearbox weight, shared between the mounts. The rear mounts often carry more, because the gearbox sits there.

3 **Fit**

Stud thread, mounting hole centers and height must match your engine feet and engine bed.

4 Rubber hardness

Chosen by the load at each mount: softer for light loads, harder for heavy ones.

RUBBER HARDNESS IN SHORE

SOFTER — HARDER

45 Shore

Soft

Best isolation, for lighter loads.

55 Shore

Medium

Balanced isolation and load capacity.

65 Shore

Hard

Firm support for the heaviest loads.

WHEN IS IT TIME TO REPLACE?

- Cracked, split or crumbling rubber
- Rubber coming away from the metal
- The engine sits lower than before or the mount has collapsed
- Soft, swollen rubber from oil or diesel
- More vibration or noise, knocking when shifting gear
- Shaft seal or shaft bearing wearing fast, shaft out of line

> Mounts age together: when one has failed, check all of them. After fitting new mounts, check the shaft alignment at the coupling and tighten the nuts to the recommended torque.

ENGINE FINDER

Find your mount in three steps.

1 **Find your engine brand**
Tap your brand in the list below.

2 **Find your engine model**
The model is on the engine's name plate or in its manual.

3 **Tap the mount**
Each box shows the mount code. Tap it to open the mount.

HOW TO READ A BOX



100 →

ENGINE BRANDS

- Yanmar →
- Yanmar saildrive →
- Cummins →
- Caterpillar →
- John Deere →
- Volvo Penta →
- MAN →
- Perkins / Sabre →
- Universal Mounts →

ENGINE FINDER

Yanmar

1GM



50 →



70 →

2GM series

2GM · 2GMF · 2GM20 · 2GM20B · 2GM20F



75 →



100 →

2YM15



75 →



100 →

3GM series

3GM · 3GMF · 3GMD · 3GMDF · 3GM30 · 3GM30B · 3GM30F



75 →



100 →

3YM series

3YM20 · 3YM30 · 3YM30AE



75 →



100 →

3JH series

3JH2 · 3JH2BE · 3JH2TBE · 3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE · 3JH40



100 →



150 →

4JH series

4JH-E · 4JH-TE · 4JH-HTE · 4JH-DTE · 4JH2 · 4JH2E · 4JH2TE · 4JH2BE · 4JH2TBE · 4JH2HTE · 4JH2DTE · 4JH2UTBE · 4JH2UTE · 4JH3E · 4JH4 · 4JH4-E · 4JH4-AE · 4JH5E · 4JH45 · 4JH57



150 →



200 →

4JH3 / 4JH4 turbo · 4JH80 · 4JH110

4JH3-TE · 4JH3-HTE · 4JH3-DTE · 4JH4-TE · 4JH4-HTE · 4JH80 · 4JH110



200 →

4LHA series

4LHA-HTP · 4LHA-DTP · 4LHA-STP



400 →



VV3 55 Shore →

4LH series



VV3 55 Shore →

6LP · 6LY · 6LF

6LPA-STP2 · 6LPA-STC · 6LY2M-WDT · 6LY2A-UTP · 6LY2M-WST · 6LY400 · 6LY440 · 6LY2A-STP · 6LF550



500 →



VV3 55 Shore 6LP →

Yanmar saildrive

2GM · 2GM20 · 2GM20F · 2YM15

with SD20 · SD25



SD150 →

3YM20 · 3YM30 · 3GM30 · 3HM35

with SD20 · SD25 · SD30



SD230 →

3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE

with SD31 · SD40 · SD50



SD230 →

4JH3E · 4JH3TE · 4JH4E · 4JH4AE · 4JH4TE

with SD40 · SD50



SD430 →

Cummins

6B 5.9



450 →

6BT · 6BTA 5.9



450 →



VV3 55 Shore →

QSB 5.9



600



VV3 55 Shore

QSB 6.7



500

6CTA 8.3 · QSC 8.3 · QSL9



500



600



VV3 65 Shore

QSM11



600



VV3 65 Shore

4BT



VV3 55 Shore

Caterpillar

3116 · 3126 · C7



500



VV3 65 Shore

C9



VV3 65 Shore

3056 · C4.4



VV3 55 Shore →

John Deere

Selected marine engines



500 →

Volvo Penta

D2 · D3 · TAMD30 · 31 · 41 · KAD · KAMD



VV2 →

D4 · D6 · TAMD 63 · 71–75 · D9



VV3 55 Shore D4 · D6 →



VV3 65 Shore TAMD · D9 →

Selected installations



VV1

MAN

D2866 · D2876



VV3

D2848 · D2840 · D2842 · D0836 · D0826



VV3 65 Shore

Selected installations



VV2



VV3 55 Shore

Perkins / Sabre

M92 · M115 · M130



VV3 55 Shore →

Selected installations



VV1 →



VV2 →

Universal Mounts

Mercruiser · Beta Marine

Selected installations



VV1 →

Yanmar · Cummins · Caterpillar

Selected installations



VV2 →

Any marine engine

Chosen by the load at each mount



VV1



VV2



VV3



MT

PART NUMBER FINDER

Have a part number?

Find the original part number on your old mount or in your engine manual, then look it up here.

Yanmar

128170-08340	50 →
128170-08350	70 →
128270-08340	75 →
128270-08341	75 →
128377-08340	75 →
128377-08341	75 →
124772-08341	100 →
128377-08351	100 →
121370-08351	150 →

129470-08350	200 →
129670-08341	200 →
119175-08440	400 →
519175-08300	400 →
119773-08300	500 →
119773-08310	500 →
129795-08340	SD150 →
196420-02310	SD230 →
196440-02380	SD430 →

Cummins

3393853	500 →	600 →
3968021	500 →	600 →
3349230		450 →
3964883		600 →

4931364	600 →
5301975	600 →

Caterpillar

139-1502	500 →

Barry Controls

27391-8	500 →
27391-9	500 →
28717-2	500 →
27655-2	450 →



01

Yanmar Engine Mounts

Replacement mounts for Yanmar 1GM, 2GM, 3GM, 2YM, 3YM, 3JH, 4JH, 4LHA and 6LP / 6LY engines. The 75, 100, 150 and 200 come in galvanized steel or 316 stainless steel.

Novibrasyon 50
Used together with the 70 on the Yanmar 1GM. →

Novibrasyon 70
Used together with the 50 on the Yanmar 1GM. →

Novibrasyon 75
For Yanmar 2GM, 3GM, 2YM and 3YM. →

YANMAR ENGINE MOUNTS

Novibrasyon

50

Used together with the 70 on the Yanmar 1GM.



50 kg
Max. load per mount

M14 × 1.5
Stud thread

159 mm
Base length

127.5 mm
Hole centers

NOVIBRASYON 50

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine alignment on Yanmar 1GM engines.

FITS THESE ENGINES

Yanmar

1GM

REPLACES PART NUMBERS

Yanmar

128170-08340

DIMENSIONS

M14 × 1.5
Stud thread

159 mm
Base length

127.5 mm
Hole centers

Ø12.5 mm + slot
Holes

66 mm
Body height


96.5 mm
Min. height

147 mm
Total height

KEY FEATURES


- Bonded rubber element designed to reduce engine vibration and noise
- Helps support stable engine alignment
- Durable construction for marine environments

Dimensions

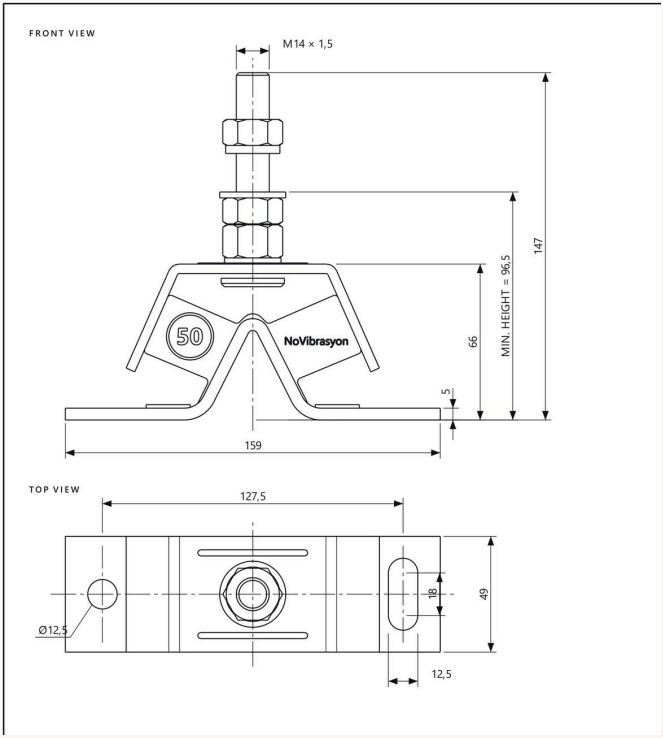


All dimensions in mm.

Natural frequency curve

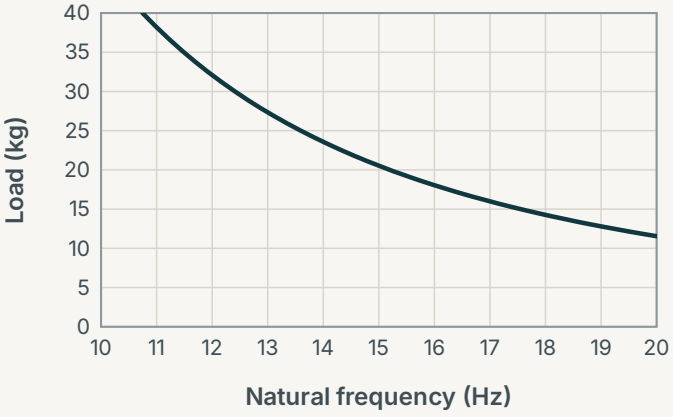

Load-deflection curve

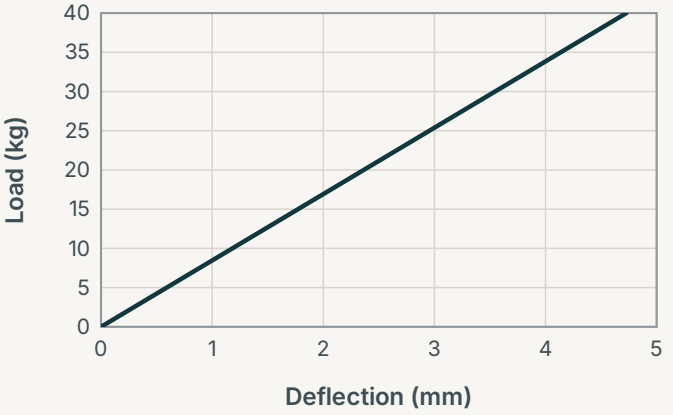

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

70

Used together with the 50 on the Yanmar 1GM.



70 kg
Max. load per mount

M14 × 1.5
Stud thread

159 mm
Base length

127.5 mm
Hole centers

NOVIBRASYON 70

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine alignment on Yanmar 1GM engines.

FITS THESE ENGINES

Yanmar

1GM

REPLACES PART NUMBERS

Yanmar

128170-08350

DIMENSIONS

M14 × 1.5
Stud thread

159 mm
Base length

127.5 mm
Hole centers

Ø12.5 mm + slot
Holes

66 mm
Body height


96.5 mm
Min. height

147 mm
Total height

KEY FEATURES


- Bonded rubber element designed to reduce engine vibration
- Helps support stable engine alignment
- Designed for use in marine environments

Dimensions

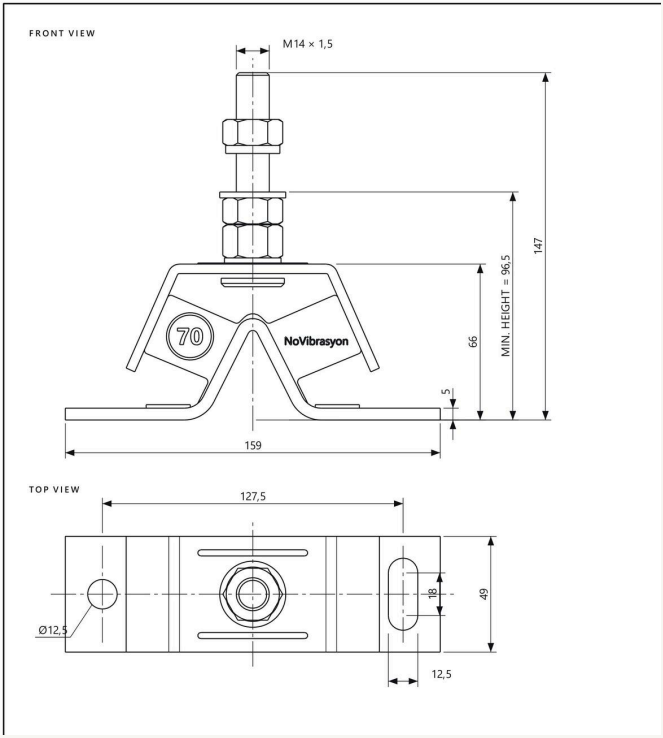


All dimensions in mm.

Natural frequency curve

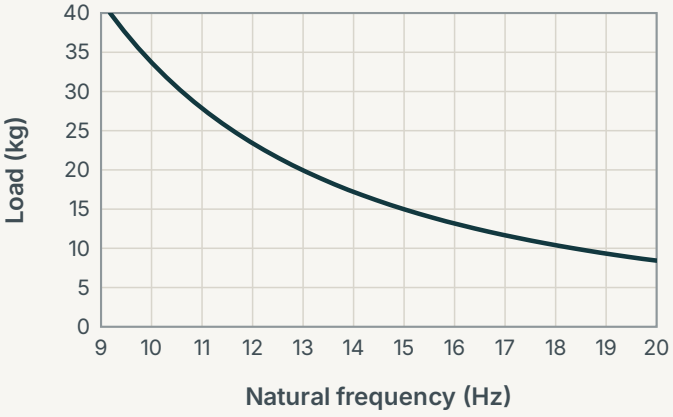

Load-deflection curve

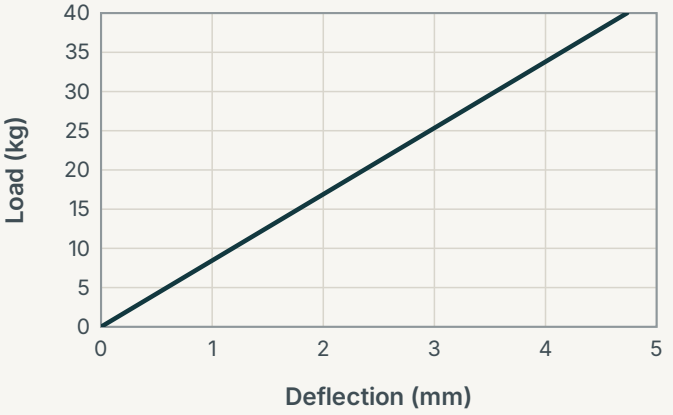

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

75

For Yanmar 2GM, 3GM, 2YM and 3YM.





● Galvanized steel ○ 316 stainless steel

M16 × 1.5
Stud thread

200 mm
Base length

173 mm
Hole centers

75 mm
Body height

NOVIBRASYON 75

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine alignment in the Yanmar applications listed below.

FITS THESE ENGINES

2GM series

2GM · 2GM20 · 2GM20B · 2GM20F · 2GMF

2YM series

2YM15

3GM series

3GM · 3GM30 · 3GM30B · 3GM30F · 3GMD · 3GMDF · 3GMF

3YM series

3YM20 · 3YM30 · 3YM30AE

REPLACES PART NUMBERS

Yanmar

128270-08341 **128270-08340**
128377-08340 **128377-08341**

DIMENSIONS

M16 × 1.5
Stud thread

200 mm
Base length

173 mm
Hole centers

Ø12.2 mm + 17.2 mm slot
Holes

75 mm
Body height


145 mm
Total height

Available body options ● Galvanized steel ○ 316 stainless steel

KEY FEATURES


- Bonded rubber element designed to reduce engine vibration and movement
- Helps support stable engine alignment
- Galvanized steel body with corrosion protection for marine use
- 316 stainless steel option for demanding saltwater environments

Dimensions

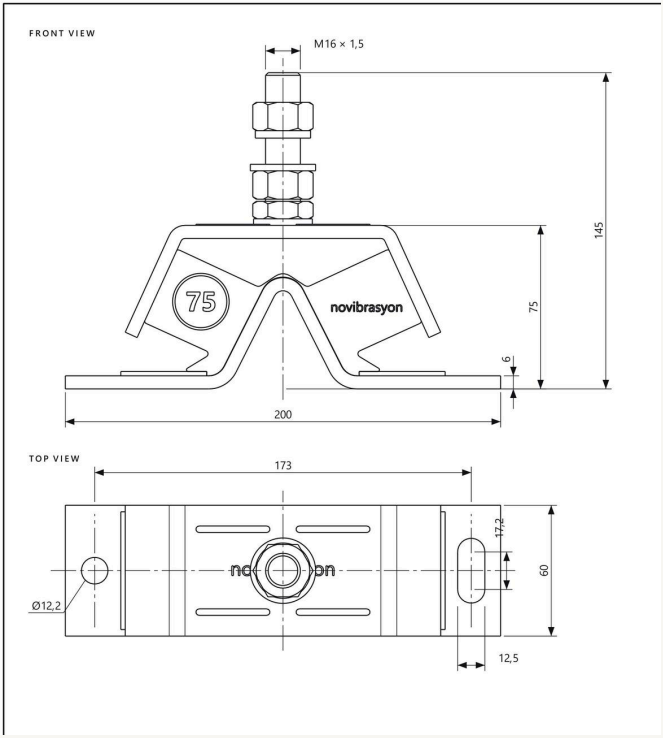


All dimensions in mm.

Natural frequency curve

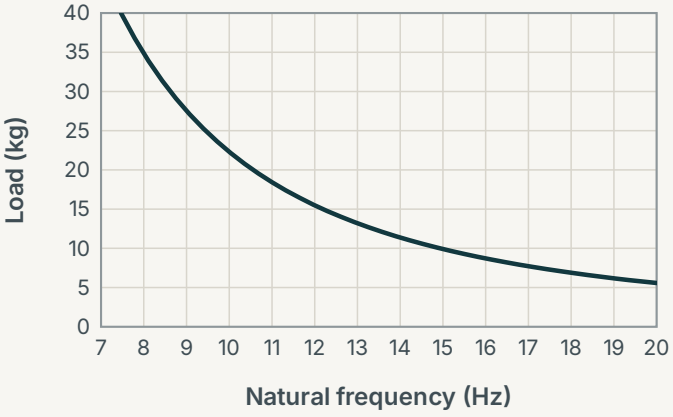

Load-deflection curve

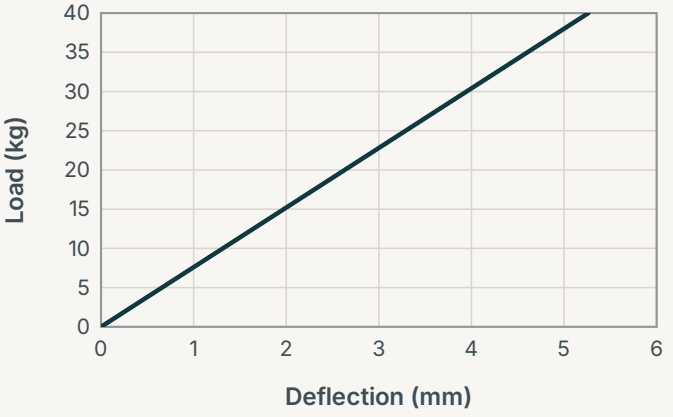

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

100

For Yanmar 2GM, 3GM, 2YM, 3YM and 3JH.





● Galvanized steel ○ 316 stainless steel

M16 × 1.5 Stud thread	**200 mm** Base length	**173 mm** Hole centers
75 mm Body height		

NOVIBRASYON 100

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine alignment in the Yanmar applications listed below.

FITS THESE ENGINES

2GM · 3GM · 2YM · 3YM

2GM · 2GMF · 2GM20 · 2GM20B · 2GM20F · 3GM · 3GMF · 3GMD · 3GMDF · 3GM30 · 3GM30B · 3GM30F · 2YM15 · 3YM20 · 3YM30 · 3YM30AE

3JH engines

3JH2 · 3JH2BE · 3JH2TBE · 3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE · 3JH40

V-drive · 3HM

2GM20V · 2GM20FV · 3GM30V · 3GM30FV · 3HM · 3HMF · 3HM35 · 3HM35F

REPLACES PART NUMBERS

Yanmar

124772-08341 **128377-08351**

DIMENSIONS

M16 × 1.5
Stud thread

200 mm
Base length

173 mm
Hole centers

Ø12.2 mm + 17.3 mm slot
Holes

75 mm
Body height


145 mm
Total height

Available body options ● Galvanized steel ○ 316 stainless steel

KEY FEATURES


- Bonded rubber element designed to reduce engine vibration and movement
- Helps support stable engine alignment
- Galvanized steel body with corrosion protection for marine use
- 316 stainless steel option for demanding saltwater environments

Dimensions

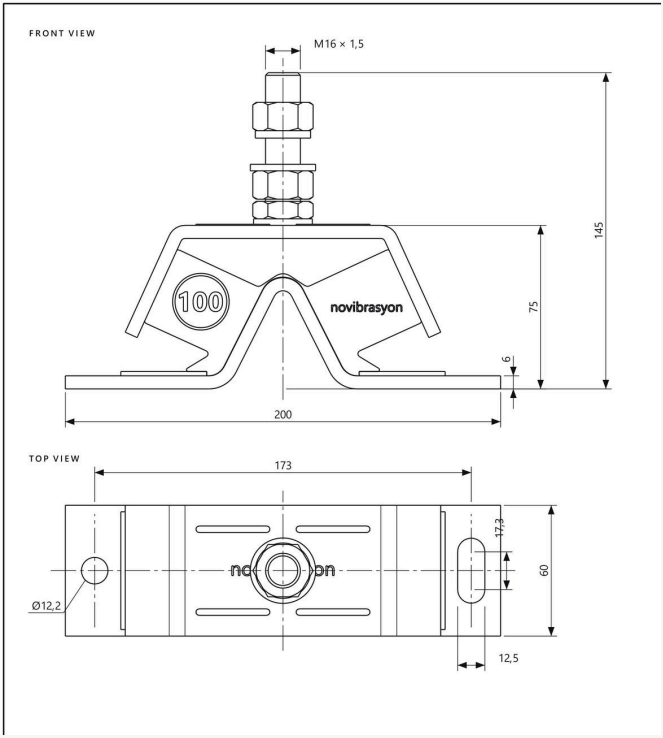


All dimensions in mm.

Natural frequency curve

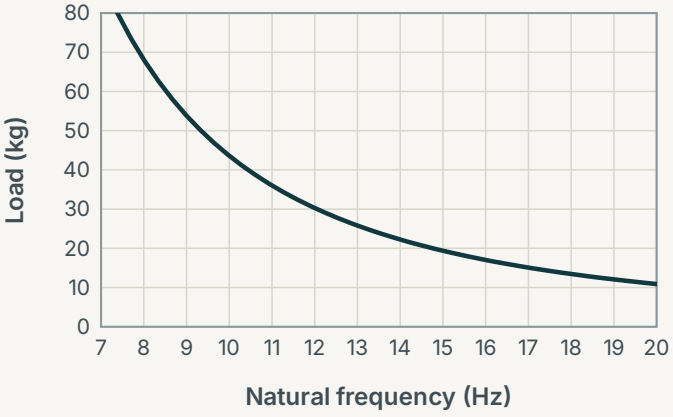

Load-deflection curve

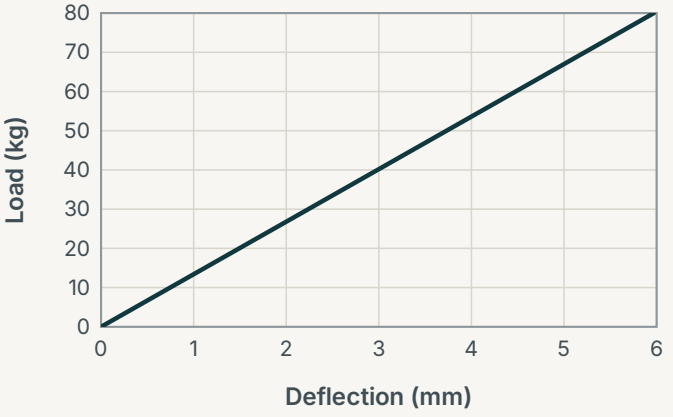

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

150

Made for higher engine loads.





● **Galvanized steel** ○ **316 stainless steel**

M16 × 1.5 Stud thread	**200 mm** Base length	**173 mm** Hole centers
75 mm Body height		

NOVIBRASYON 150

Fit & specifications

A marine engine mount designed for higher engine loads, vibration reduction and stable engine alignment on Yanmar 3JH and 4JH engines.

FITS THESE ENGINES

3JH series

3JH2 · 3JH2BE · 3JH2TBE · 3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE · 3JH40

4JH series

4JH-E · 4JH-TE · 4JH-HTE · 4JH-DTE · 4JH2 · 4JH2E · 4JH2TE · 4JH2BE · 4JH2TBE · 4JH2HTE · 4JH2DTE · 4JH2UTBE · 4JH2UTE · 4JH3E · 4JH4 · 4JH4-E · 4JH4-AE · 4JH5E · 4JH45 · 4JH57

REPLACES PART NUMBERS

Yanmar

121370-08351

DIMENSIONS


M16 × 1.5 Stud thread	**200 mm** Base length
173 mm Hole centers	**Ø12.2 mm + 17.2 mm slot** Holes
75 mm Body height	**145 mm** Total height

Available body options ● Galvanized steel ○ 316 stainless steel

KEY FEATURES


- Designed for higher engine loads
- Bonded rubber element designed to reduce vibration and engine movement
- Galvanized steel body with corrosion protection for marine use
- 316 stainless steel option for demanding saltwater environments

Dimensions

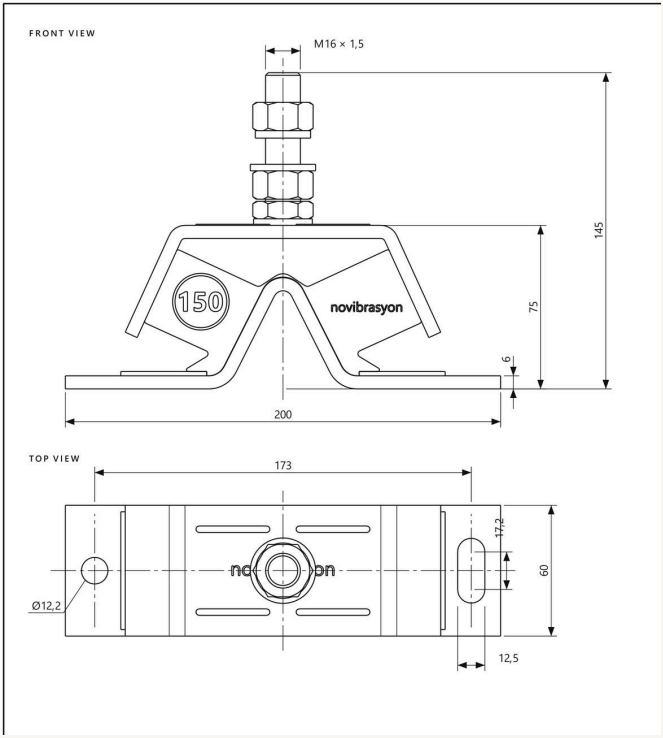


All dimensions in mm.


Natural frequency curve

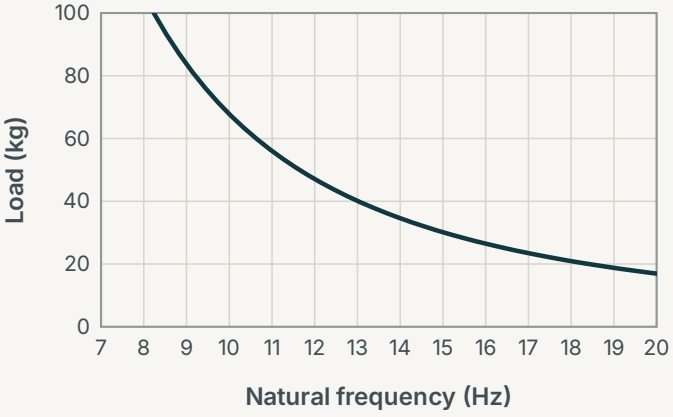

Load-deflection curve

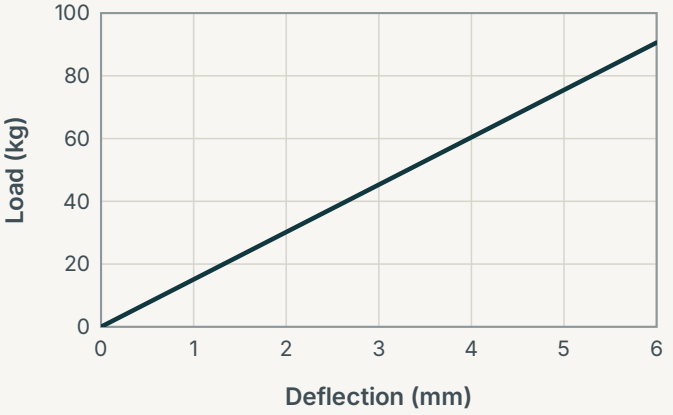

PHOTOS

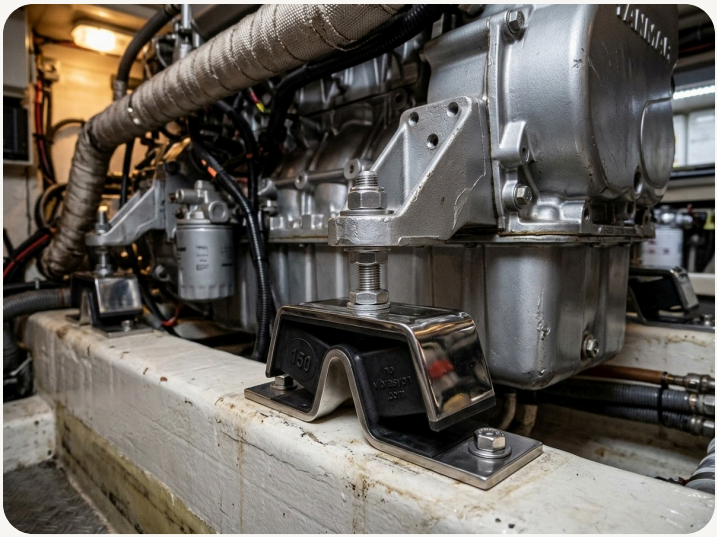



To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

200

For the Yanmar 4JH series, turbo 4JH3 / 4JH4, 4JH80 and 4JH110.



● Galvanized steel ○ 316 stainless steel

M16 × 1.5
Stud thread

205 × 60 mm
Base (L × W)

174 mm
Hole centers

76 mm
Body height

NOVIBRASYON 200

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine alignment in Yanmar 4JH applications.

FITS THESE ENGINES

4JH series

4JH-E · 4JH-TE · 4JH-HTE · 4JH-DTE · 4JH2 · 4JH3E · 4JH4-E · 4JH4-AE · 4JH5E · 4JH45 · 4JH57

4JH3 series

4JH3-TE · 4JH3-HTE · 4JH3-DTE

4JH4 series

4JH4-TE · 4JH4-HTE

4JH80 / 4JH110

4JH80 · 4JH110

REPLACES PART NUMBERS

Yanmar

129470-08350 **129670-08341**

DIMENSIONS

M16 × 1.5
Stud thread

205 × 60 mm
Base (L × W)

174 mm
Hole centers

Ø12.2 mm + 17.5 mm slot
Holes

76 mm
Body height

103 mm
Min. height


145 mm
Total height

Available body options ● Galvanized steel ○ 316 stainless steel

KEY FEATURES


- Bonded rubber element designed to reduce engine vibration and movement
- Helps support stable engine alignment
- Galvanized steel body with corrosion protection for marine use
- 316 stainless steel option for demanding saltwater environments

Dimensions

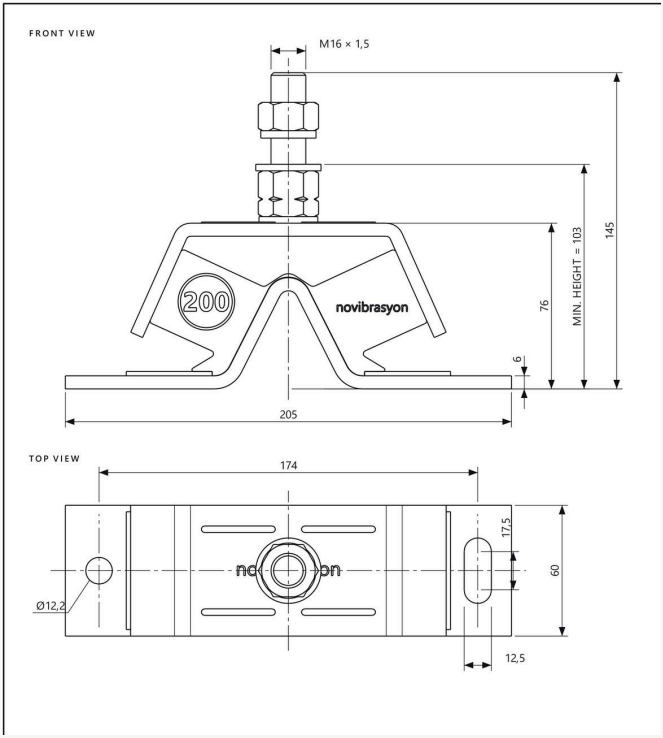


All dimensions in mm.

Natural frequency curve

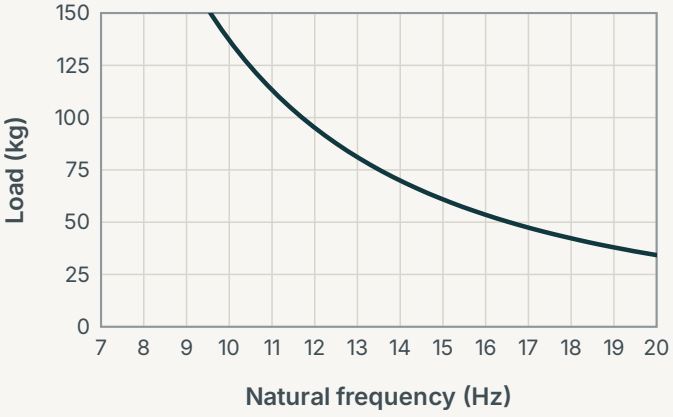

Load-deflection curve

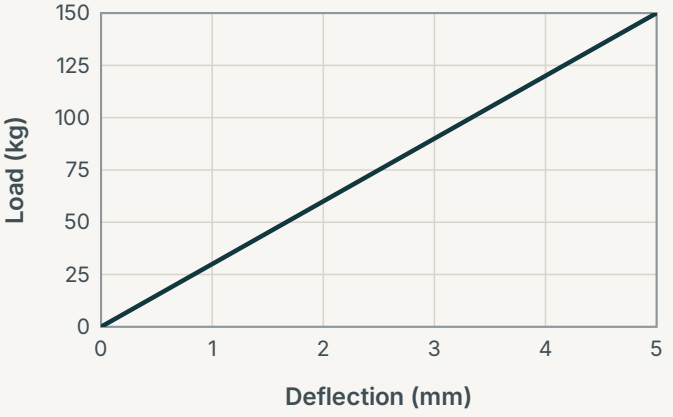

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

400

Aluminum strength for the Yanmar 4LHA.



M20 Stud thread	**166 × 66 mm** Base (L × W)	**127 mm** Hole centers
80 mm Body height		

NOVIBRASYON 400

Fit & specifications

A marine engine mount designed to reduce vibration and help maintain stable engine alignment.

FITS THESE ENGINES

Yanmar

4LHA-HTP · 4LHA-DTP · 4LHA-STP

REPLACES PART NUMBERS

Yanmar

519175-08300 **119175-08440**

Novibrasyon 400 is our product model designation.


DIMENSIONS

M20 Stud thread	**166 × 66 mm** Base (L × W)
127 mm Hole centers	**2 slots, 14 × 28 mm** Holes
80 mm Body height	**120 mm** Min. height
170 mm Total height	

KEY FEATURES

- Marine-grade aluminum body with corrosion-resistant construction
- Bonded rubber element designed to reduce engine vibration and noise
- Helps support stable engine alignment
- Designed for the demanding conditions of marine use

Dimensions

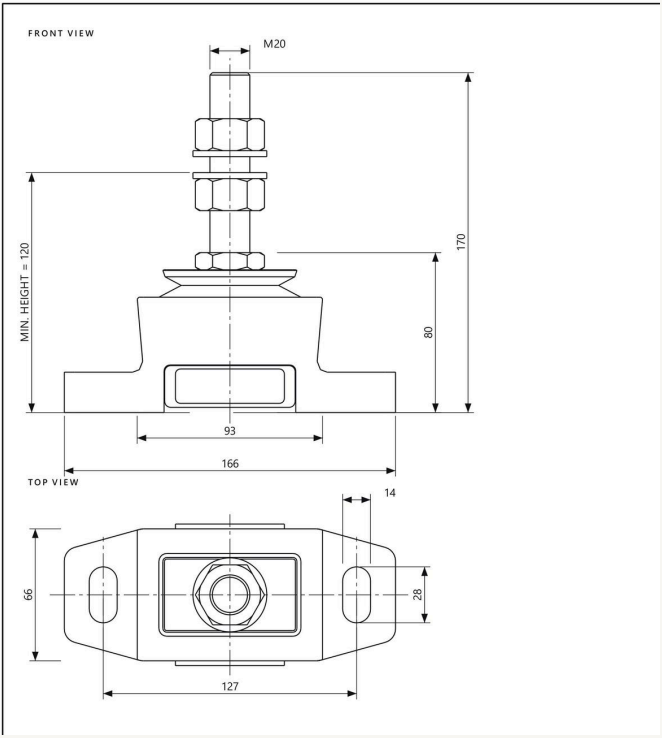

All dimensions in mm.

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

YANMAR ENGINE MOUNTS

Novibrasyon

500

For Yanmar 6LP / 6LY, Cummins and Caterpillar.



1″ × 14 TPI Stud thread	**166 × 93 mm** Base (L × W)	**127 mm** Hole centers
90 mm Body height		

NOVIBRASYON 500

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine alignment.

FITS THESE ENGINES

Yanmar

6LPA-STP2 · 6LPA-STC · 6LY2M-WDT · 6LY2A-UTP · 6LY2M-WST · 6LY400 · 6LY440 · 6LY2A-STP · 6LF550

Cummins

6CTA 8.3 · QSC 8.3 · QSL9 · QSB 6.7

Caterpillar

3116 · 3126 · C7

John Deere

Selected marine engine applications

The mount may also suit other marine engines when the mounting dimensions and load requirements match.

REPLACES PART NUMBERS

Yanmar

119773-08300 **119773-08310**

Cummins

3968021 **3393853**

Caterpillar

139-1502

Barry Controls

27391-8 **27391-9** **28717-2**

DIMENSIONS

1'' × 14 TPI
Stud thread

166 × 93 mm
Base (L × W)

127 mm
Hole centers

2 slots, 14 × 28 mm
Holes

90 mm
Body height


130 mm
Min. height

190 mm
Total height

KEY FEATURES

- Marine-grade aluminum body with corrosion-resistant construction
- Bonded rubber element designed to reduce vibration transfer
- Helps support stable engine alignment
- Designed for use in humid and saltwater marine environments

Dimensions

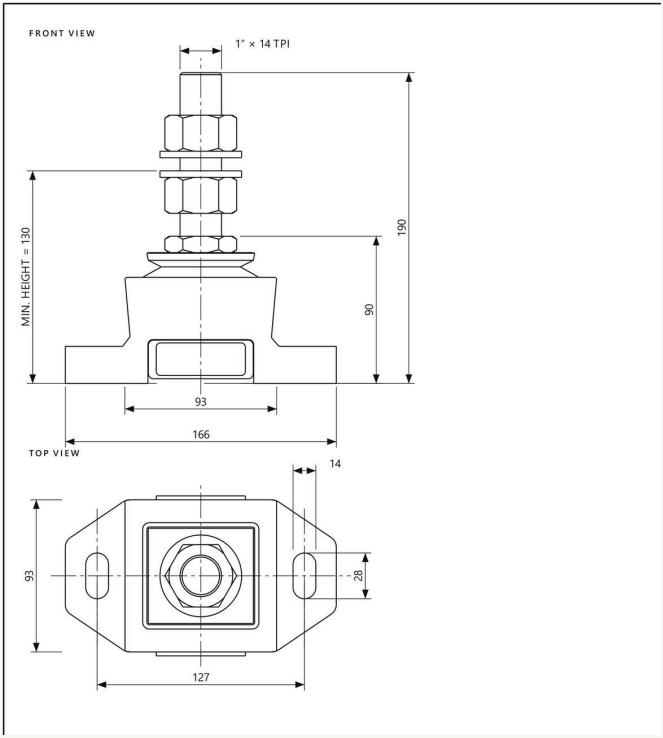

All dimensions in mm. The drawing shows an M24 stud; the stud thread can differ by installation. Please confirm before ordering.

PHOTOS





Please confirm the existing mount part number, stud thread and engine load before ordering. Yanmar installations may use a different stud specification. For help confirming fitment, please send us your engine model and the part number or a photo of your current mount.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked



02

Saildrive Mounts

Rear mounts for the gearbox / saildrive side of Yanmar saildrive installations, from SD20 to SD50.

Novibrasyon SD Saildrive Series
Three saildrive mounts, SD20 to SD50. →

SAILDRIVE MOUNTS

Novibrasyon Saildrive

SD

Three saildrive mounts, SD20 to SD50.



SD150



SD230



SD430

SD20–SD50
Yanmar saildrive

SD150 · SD230 · SD430
Three models

M12
Studs, top and bottom

NOVIBRASYON SD SAILDRIVE SERIES

Fit & specifications

Saildrive mounts for Yanmar saildrive installations. The SD150, SD230 and SD430 share the same mounting dimensions and differ in load capacity; choose by engine and saildrive.

FITS THESE ENGINES

SD150

SD20 · SD25

2GM · 2GM20 · 2GM20F · 2YM15

SD230

SD20 · SD25 · SD30

3YM20 · 3YM30 · 3GM30 · 3HM35

SD230

SD31 · SD40 · SD50

3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE

SD430

SD40 · SD50

4JH3E · 4JH3TE · 4JH4E · 4JH4AE · 4JH4TE

MOUNTING DETAILS

SD150

Yanmar part no.	**129795-08340**
Studs	**M12, top and bottom**
Base (L × W)	**130 × 61 mm**
Height	**64 mm**

SD230

Yanmar part no.	**196420-02310**
Studs	**M12, top and bottom**
Base (L × W)	**130 × 61 mm**
Height	**64 mm**

SD430


Yanmar part no.	**196440-02380**
Studs	**M12, top and bottom**
Base (L × W)	**130 × 61 mm**
Height	**64 mm**

KEY FEATURES


- Bonded rubber element designed to reduce vibration and noise
- Supports the engine at the gearbox / saildrive side
- One mount per saildrive

Dimensions


SD150



SD230



SD430



All dimensions in mm. Typical saildrive layout: the saildrive mount supports the gearbox / saildrive side at the back and two engine mounts carry the front. The front mount model depends on the engine — see the engine finder or ask us.

PHOTOS






To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

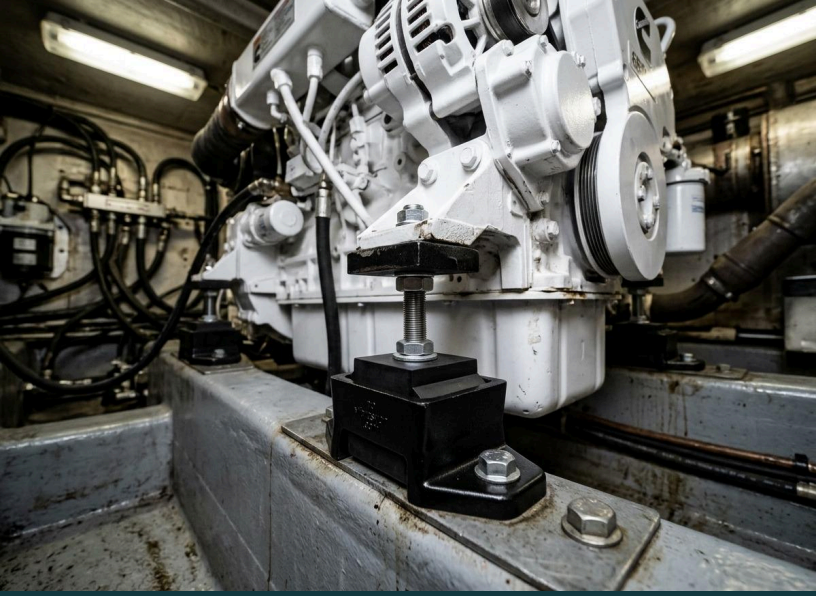

03

Cummins Engine Mounts

Block mounts for Cummins 5.9, 6CTA 8.3, QSC 8.3, QSL9, QSB and QSM11 marine diesels.

Novibrasyon 450
Heavy-duty support for the Cummins 5.9. →

Novibrasyon 600
Engine and gearbox, held in line. →

CUMMINS ENGINE MOUNTS

Novibrasyon

450

Heavy-duty support for the Cummins 5.9.



M20 Stud thread	**165 × 85 mm** Base (L × W)	**127 mm** Hole centers
72 mm Body height		

NOVIBRASYON 450

Fit & specifications

A marine engine mount designed to reduce vibration and help maintain stable engine and drivetrain alignment.

FITS THESE ENGINES

Cummins

6B 5.9 | 6BT 5.9 | 6BTA 5.9

REPLACES PART NUMBERS

Cummins	Barry Controls
3349230	27655-2


DIMENSIONS

M20 Stud thread	**165 × 85 mm** Base (L × W)
127 mm Hole centers	**72 mm** Body height
120 mm Min. height	**170 mm** Total height

KEY FEATURES

- Durable construction for marine diesel applications
- Bonded rubber element designed to reduce engine vibration and noise
- Helps reduce vibration transfer to the hull and drivetrain
- Designed for use in demanding marine environments

Dimensions

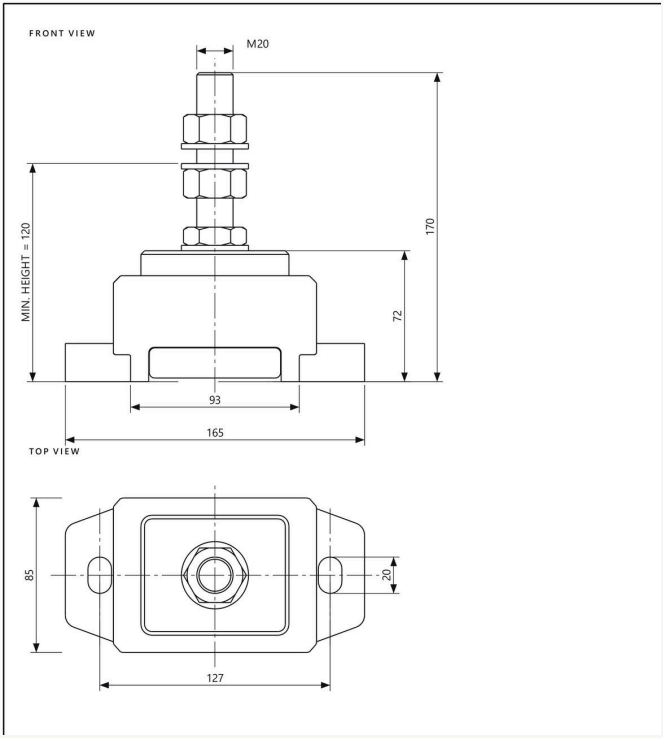

All dimensions in mm.

PHOTOS





To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

CUMMINS ENGINE MOUNTS

Novibrasyon

600

Engine and gearbox, held in line.



M24 Stud thread	**166 × 93 mm** Base (L × W)	**127 mm** Hole centers
95 mm Body height		

NOVIBRASYON 600

Fit & specifications

A marine engine mount designed to reduce vibration and support stable engine and gearbox alignment.

FITS THESE ENGINES

Cummins

QSM11 · QSB 5.9 · 6CTA 8.3 · QSL9 · QSC 8.3

REPLACES PART NUMBERS · BY ENGINE APPLICATION

Cummins QSM11
3964883

Cummins QSB 5.9
4931364 5301975

Cummins 6CTA 8.3 / QSL9 / QSC 8.3
3968021 3393853

DIMENSIONS

M24
Stud thread

166 × 93 mm
Base (L × W)

127 mm
Hole centers


95 mm
Body height

190 mm
Total height

KEY FEATURES

- Marine-grade aluminum body with corrosion-resistant construction
- Bonded rubber element designed to reduce engine vibration and noise
- Helps support stable engine and gearbox alignment
- Suitable for leisure and commercial marine applications

Dimensions

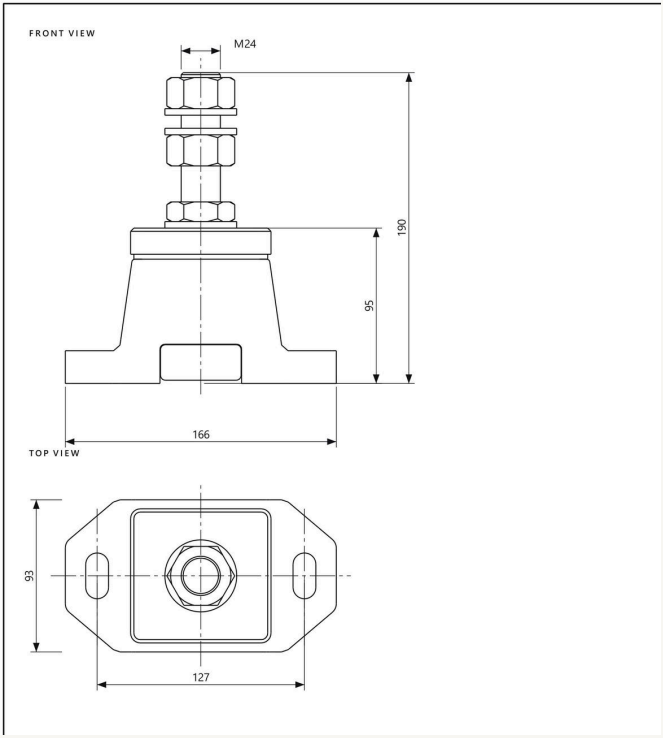

All dimensions in mm.

PHOTOS





Mount specifications can vary between engine and gearbox configurations. Please confirm the existing mount part number, stud size and load requirements before ordering. Send us a photo of your current mount if you need help checking compatibility.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked



04

Universal Mounts

Flexible mounts chosen by load and rubber hardness, for Volvo Penta, Perkins, Mercruiser, Beta, MAN, Cummins, Caterpillar and similar engines.

Novibrasyon VV1
Flexible support for smaller engines. →

Novibrasyon VV2
Flexible support for mid-size engines. →

Novibrasyon VV3
Flexible support for large marine diesels. →

Novibrasyon MT Series
Three sizes. Three hardness options. →

UNIVERSAL MOUNTS

Novibrasyon Universal

VV1

Flexible support for smaller engines.





● **Galvanized steel** ○ **316 stainless steel**

45–100 kg
Max. load per mount

M16 × 1.5
Stud thread

120 × 60.5 mm
Base (L × W)

100 mm
Hole centers

NOVIBRASYON VV1

Fit & specifications

A flexible marine engine mount designed to reduce vibration and support stable engine alignment. Available in three rubber hardness options, with a choice of galvanized steel or 316 stainless steel body.

TYPICAL APPLICATIONS

Volvo Penta · Perkins · Mercruiser · Beta Marine · and similar engines

Selected installations, subject to checking the mounting dimensions and engine load.

RUBBER HARDNESS & MAXIMUM LOAD

45 kg	55 kg	100 kg
45 Shore · per mount	55 Shore · per mount	65 Shore · per mount

DIMENSIONS

M16 × 1.5
Stud thread

120 × 60.5 mm
Base (L × W)

100 mm
Hole centers

Ø11 mm
Holes

43 mm
Body height

68.5 mm
Min. height


125 mm
Total height

Available body options ● Galvanized steel ○ 316 stainless steel

KEY FEATURES


- Bonded rubber element designed to reduce vibration and noise
- Helps support stable engine alignment

Dimensions

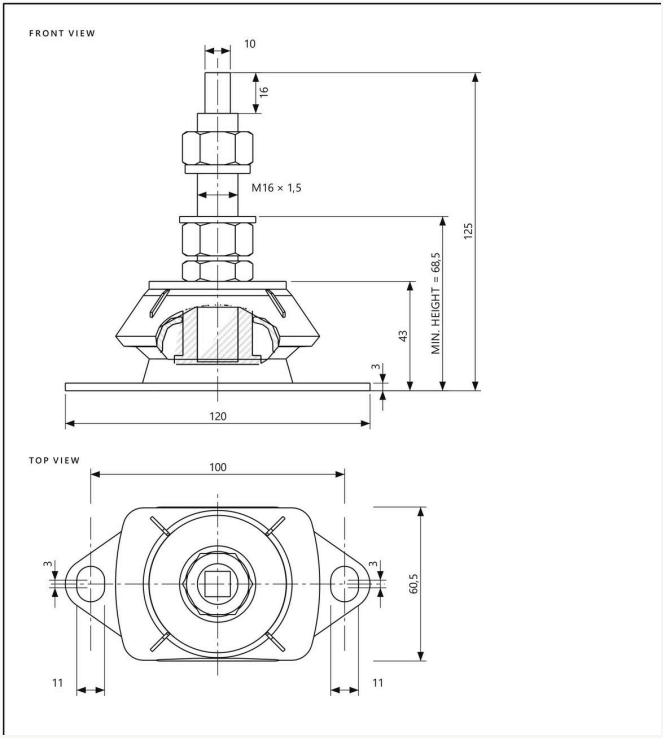


All dimensions in mm.

Natural frequency curve

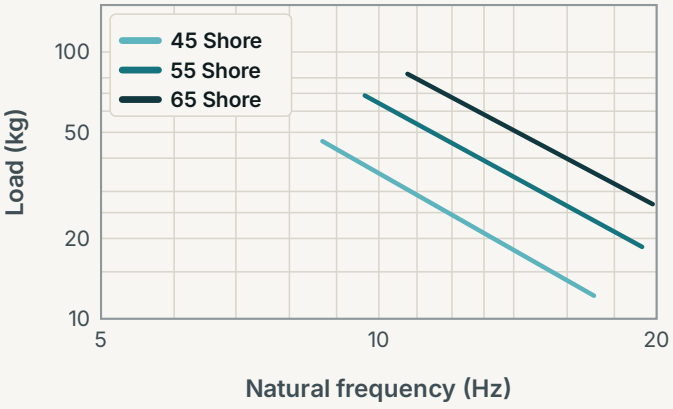

Load-deflection curve

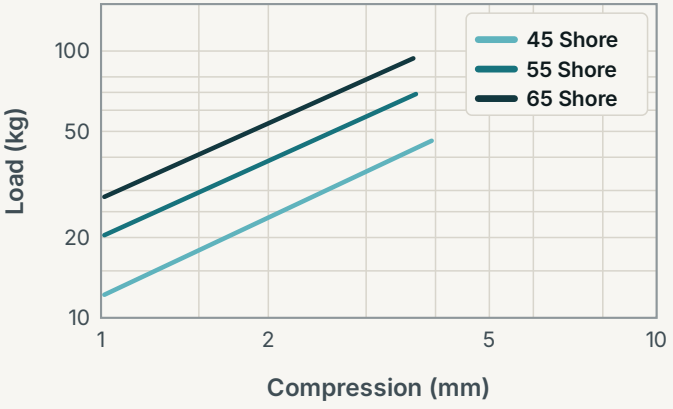

PHOTOS





To help us select the correct variant, please send us your engine model and a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

UNIVERSAL MOUNTS

Novibrasyon Universal

VV2

Flexible support for mid-size engines.





● **Galvanized steel** ○ **316 stainless steel**

120–300 kg
Max. load per mount

M16 × 1.5
Stud thread

184 × 82 mm
Base (L × W)

140 mm
Hole centers

NOVIBRASYON VV2

Fit & specifications

A flexible marine engine mount designed to reduce vibration and support stable engine alignment. Available in three rubber hardness options, with a choice of galvanized steel or 316 stainless steel body.

FITS THESE ENGINES

Volvo Penta

D2-40 · D2-55 · D2-75 · D3-110 · D3-130 · D3-160 · D3-190 · TAMD30 · TAMD31 · TAMD41 · KAD32 · KAMD42 · KAMD43 · KAMD44 · KAD300

Other engines

Yanmar · Caterpillar · MAN · Perkins · Cummins · and similar engines

Selected marine engines, subject to checking the mounting dimensions and load distribution.

RUBBER HARDNESS & MAXIMUM LOAD

120 kg	200 kg	300 kg
45 Shore · per mount	55 Shore · per mount	65 Shore · per mount

DIMENSIONS


M16 × 1.5 Stud thread	**184 × 82 mm** Base (L × W)
140 mm Hole centers	**Ø13 mm + 17 mm slot** Holes
55 mm Body height	**78.5 mm** Min. height
128 mm Total height	

Available body options ● Galvanized steel ○ 316 stainless steel

KEY FEATURES


- Flexible rubber element designed to reduce vibration and noise
- Helps support stable engine alignment

Dimensions

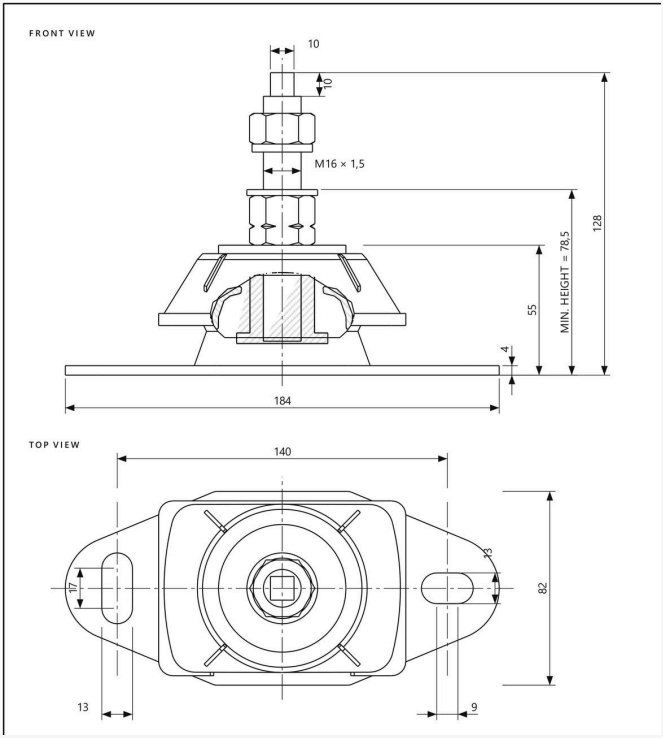


All dimensions in mm.

Natural frequency curve

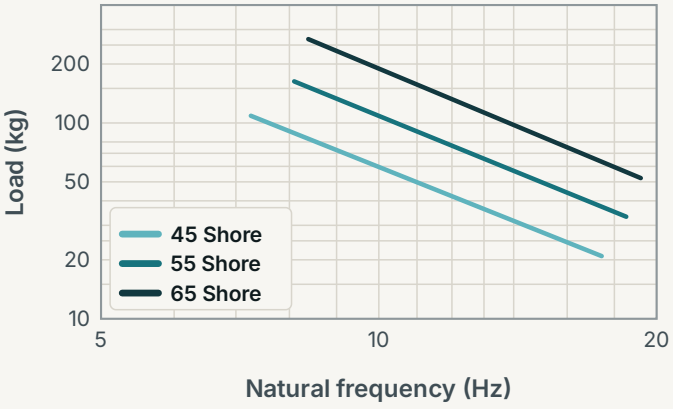


Load-deflection curve

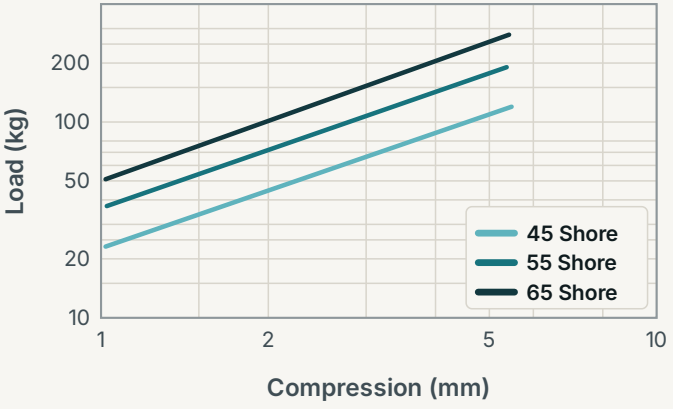

PHOTOS



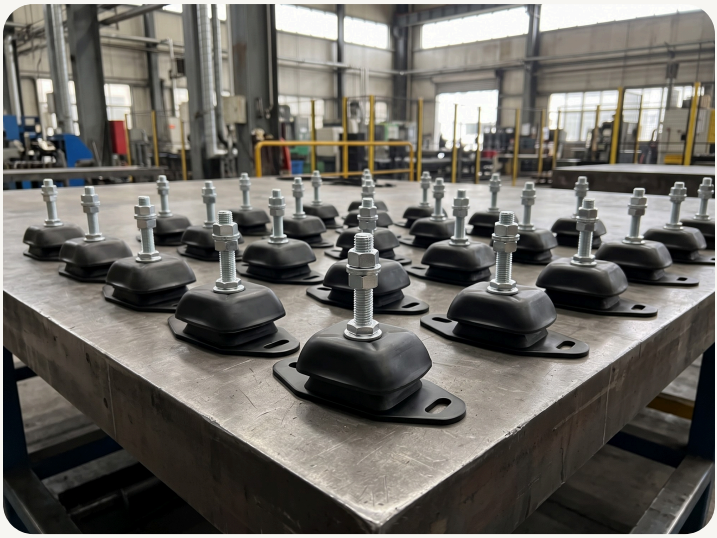

To help us select the correct variant, please send us your engine model and a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

UNIVERSAL MOUNTS

Novibrasyon Universal

VV3

Flexible support for large marine diesels.



500 / 800 kg
Max. load per mount

M20 × 1.5
Stud thread

228 × 112 mm
Base (L × W)

182 mm
Hole centers

NOVIBRASYON VV3

Fit & specifications

A large flexible marine engine mount designed to reduce vibration and support stable engine alignment. Available in two rubber hardness and load capacity options.

FITS THESE ENGINES

Volvo Penta

D4 · D6

TAMD63L-A · 63P-A

TAMD71B

TAMD73P-A · 73WJ-A

TAMD74A-A · A-B · C-A

TAMD74L-A · L-B · P-A · P-B

TAMD75P-A

MAN

D2866 LE201

D2866 LE202

D2866 LE203

D2866 LE4 Series

D2876 LE301

D2876 LE401

D2876 LE402

D2876 LE403

D2876 LE404

D2876 LE405

D2848 LE4 Series

D2840 LE4 Series

D2842 LE4 Series

MAN and Trelleborg / Metalastik reference numbers are listed in the part number finder.

AVAILABLE VARIANTS

55 Shore — 500 kg per mount

Volvo Penta D4 and D6 series; Yanmar 4LH and 6LP series; Cummins 4BT, 6BT, 6BTA 5.9 and QSB 5.9; Perkins/Sabre M92, M115 and M130; Caterpillar 3056 and C4.4; selected MAN applications

65 Shore — 800 kg per mount

Volvo Penta TAMD 63/71/72/73/74/75 and D9 series; MAN D0836, D0826, D2848 (V8), D2840 (V10) and D2842 (V12); Cummins 6CTA 8.3, QSC 8.3, QSL9 and QSM11; Caterpillar 3116, 3126, C7 and C9

DIMENSIONS

M20 × 1.5
Stud thread

228 × 112 mm
Base (L × W)

182 mm
Hole centers

18 × 34 mm slots
Holes

70 mm
Body height


100 mm
Min. height

170 mm
Total height

KEY FEATURES


- Bonded rubber element designed to reduce vibration and noise
- Load options for different engine and gearbox installations
- Helps support stable engine alignment

Dimensions

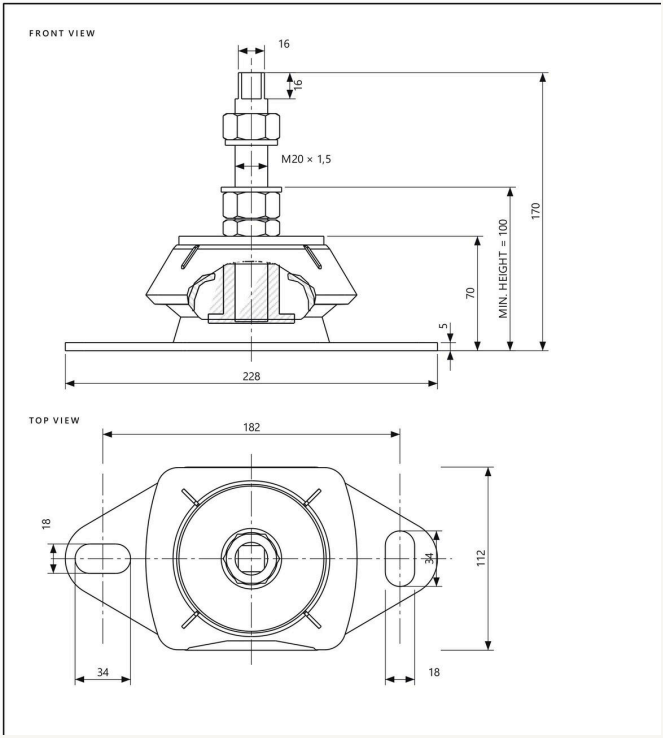


All dimensions in mm.

Natural frequency curve

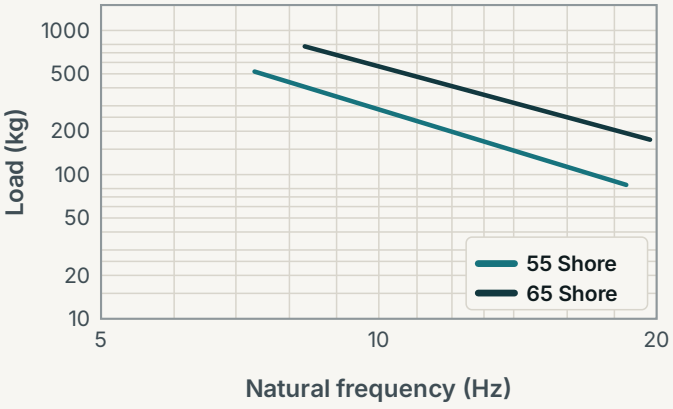

Load-deflection curve

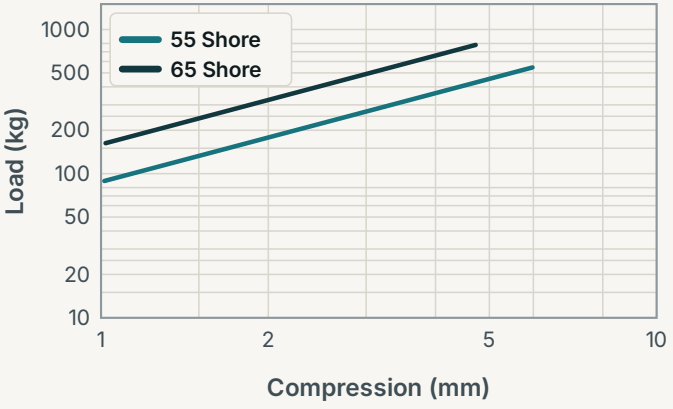

PHOTOS





The engine models and part numbers listed are potential replacement references; exact compatibility has not been verified for every model. To select the correct variant, please send us your engine model, engine and gearbox weight, and a photo or the dimensions of your current mount before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

UNIVERSAL MOUNTS

Novibrasyon Universal

MT

Three sizes. Three hardness options.



MT1



MT2



MT3

80–550 kg
Max. load per mount

MT1 · MT2 · MT3
Three sizes

45 · 55 · 65
Shore hardness options

NOVIBRASYON MT SERIES

Fit & specifications

The Novibrasyon MT series offers three mount sizes for a wide range of marine engines. Each model is available in 45, 55 and 65 Shore rubber hardness options, allowing the mount to be selected according to the load at each mounting point.

MAXIMUM STATIC LOAD PER MOUNT

MT1

approx. 9–130 hp

45 Shore	55 Shore	65 Shore
80 kg	**140 kg**	**200 kg**

MT2

approx. 100–240 hp

45 Shore	55 Shore	65 Shore
140 kg	**220 kg**	**350 kg**

MT3

approx. 200–650 hp

45 Shore	55 Shore	65 Shore
200 kg	**400 kg**	**550 kg**

Loads shown are maximum static loads per mount. Horsepower ranges are guides; engine weight and load distribution determine the correct model.

MOUNTING DETAILS

MT1

Stud thread	**M16 × 1.5**
Base (L × W)	**140 × 68 mm**
Hole centers	**100 mm**
Slots	**12.5 × 28 mm**
Height	**70 mm**

MT2

Stud thread	**M16 × 1.5 or M18 × 1.5**
Base (L × W)	**166 × 98 mm**
Hole centers	**133 mm**
Slots	**13 × 28 mm**
Height	**75 mm**

MT3


Stud thread	**M24 × 1.5**
Base (L × W)	**184 × 105 mm**
Hole centers	**140 mm**
Slots	**16 × 33 mm**
Height	**90 mm**

KEY FEATURES


- Three sizes covering a broad range of marine engine installations
- Bonded rubber element designed to reduce vibration and noise
- Choice of rubber hardness to suit different mounting loads

Dimensions


MT1



MT2



MT3



All dimensions in mm. MT curves are calculated (5 mm deflection assumed at maximum load) and will be confirmed by measurement.

PHOTOS





To help us select the correct MT model and Shore hardness, please send your engine model, engine and gearbox weight, and a photo or measurements of your current mounts before ordering.

Not sure it fits?

WhatsApp +90 530 780 19 95

info@novibrasyonmarin.com

FedEx or UPS Express · 2–4 business days · insured and tracked

ALSO FROM NOVIBRASYON

Shaft bearings.

Bronze and fiber shaft bearings for smooth, efficient shaft rotation, available in metric and inch sizes.



Bronze shaft bearings

- Marine-grade bronze (CuSn12, CuSn10Pb10, etc.)
- High resistance to saltwater and chemicals
- Precision-engineered for low-friction shaft rotation
- Operating temperature: −40 °C to +150 °C



Fiber shaft bearings

- High-performance fiber composite material
- Lighter than traditional metal bearings
- High resistance to seawater and chemicals
- Operating temperature: −30 °C to +120 °C

FULL SIZE LIST · WHATSAPP

+90 530 780 19 95

HOW TO ORDER

Ordering is simple.

1 **Tell us your engine**

Engine make and model, and the position you need: front, rear, left, right or saildrive.

2 **Send a photo**

A photo of your current mount, its part number, or its stud thread, mounting centers and height.

3 **We confirm and ship**

FedEx Express or UPS Express. Insured and tracked, in 2–4 business days depending on destination and customs.



WHATSAPP

+90 530 780 19 95

NOVIBRASYON
MARINE ENGINE MOUNTS

Feel the quality. Enjoy the silence.

Ask on WhatsApp

www.novibrasyon.com

WhatsApp
+90 530 780 19 95

E-mail
info@novibrasyonmarin.com

Web
www.novibrasyon.com

Instagram
@novibrasyon

Address
Evliya Çelebi Mah. Mavi Sokak No: 25
Tuzla / İstanbul, Türkiye

Engine brand names are used only to show compatibility. Specifications and images may change without notice. Please confirm fitment before ordering.