NOVIBRASYON
MARINE ENGINE MOUNTS

PRODUCT CATALOGUE
2026

Marine engine mounts.

Feel the quality. Enjoy the silence.

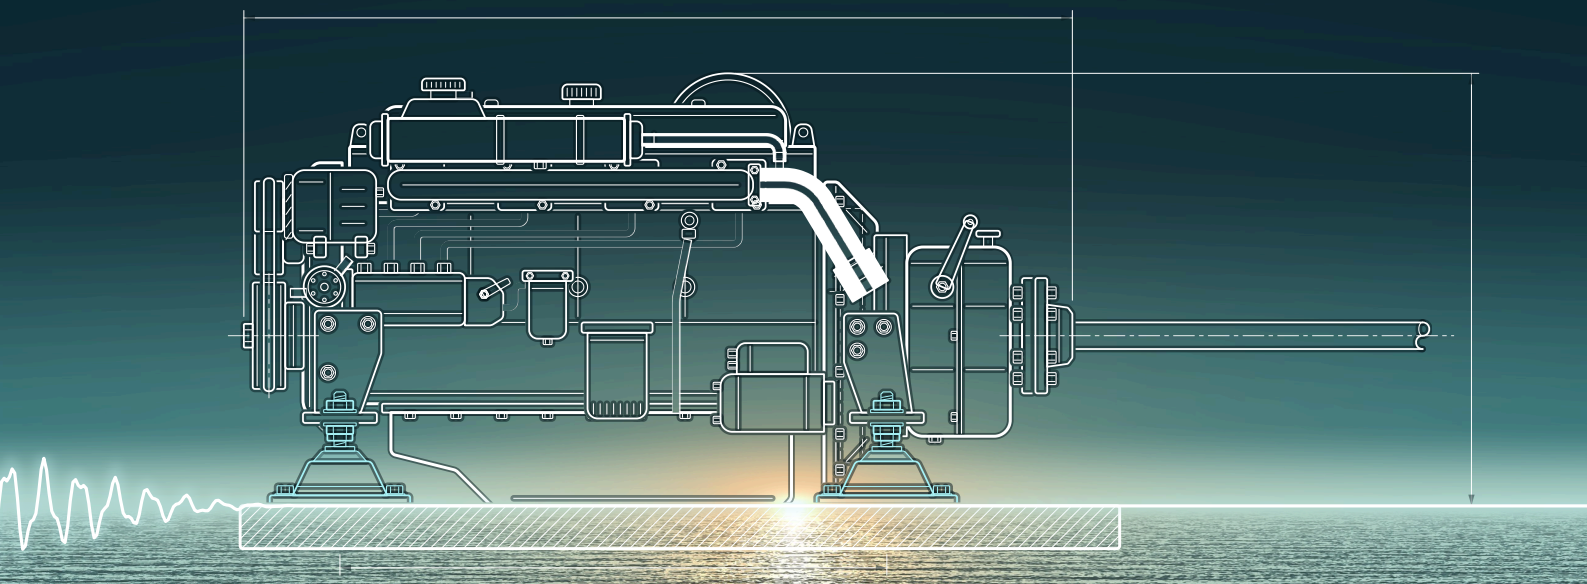

Engine mounts for Yanmar · Cummins · Caterpillar · Volvo Penta · MAN · Perkins

www.novibrasyon.com WhatsApp +90 530 780 19 95 info@novibrasyonmarin.com

ABOUT US

Built to Perform. Engineered to Last.

Our mission is simple: the right product, with exceptional quality, delivered as quickly as possible.

01 ABOUT US

Five decades of rubber expertise.

Novibrasyon is a marine brand built on our family's rubber manufacturing experience since 1970. We make professional vibration mounts for boat owners, service centres and shipyards around the world.

Yanmar · Volvo Penta · Cummins · Caterpillar · MAN · Perkins · Beta Marine · Mercruiser · John Deere

02 MANUFACTURING & QUALITY

Quality built into every product.

Rubber compounds developed for marine use and corrosion-resistant metal parts. Every mount passes a multi-stage inspection: dimensions, rubber-to-metal bonding and load tolerance.

Marine-grade materials · Multi-stage inspection · 45–65 Shore options

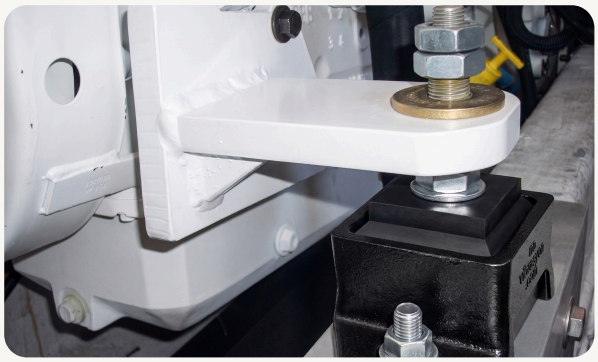

03 PACKAGING & DISPATCH

Carefully packed. Quickly shipped.

Most orders leave within 24 hours, packed for international transport and checked one last time. Tracking is sent as soon as the parcel ships.

FedEx Express Priority · Dispatch within 24 hours · Worldwide shipping

04 DELIVERY & SUPPORT

Fast delivery. Reliable support.

Europe in 1–2, North America in 2–3 and other regions usually in 3–5 business days. Our team helps you choose the right mount and checks compatibility before you order.

Support on WhatsApp and e-mail

05 BUSINESS SOLUTIONS

Solutions for professionals.

Custom manufacturing and wholesale for shipyards, boat builders, service centres, engine rebuilders and distributors. Contact us for partnerships and special projects.

Shipyards · Boat builders · Distributors

WHAT WE DO

Professional vibration mounts for every marine engine.

We manufacture professional vibration mounts for the marine engines of Yanmar, Volvo Penta, Cummins, Caterpillar, MAN, Perkins, Beta Marine, Mercruiser, John Deere and many other brands, together with bronze and fiber shaft bearings.

Working with us is simple. Tell us your engine model, or send a photo of your old mount if you are not sure. We check the part number, stud thread and mounting dimensions, and confirm the right mount before you order.

Your order is packed for international transport and leaves within 24 hours with FedEx or UPS Express, insured and tracked. It usually reaches you in 2–4 business days, depending on destination and customs.

ENGINES WE MAKE MOUNTS FOR

Yanmar · Volvo Penta · Cummins · Caterpillar · MAN · Perkins · Beta Marine · Mercruiser · John Deere

Evliya Çelebi Mah. Mavi Sokak No: 25 · Tuzla / İstanbul, Türkiye
www.novibrasyon.com

WELCOME TO NOVIBRASYON MARIN

Feel the quality. Enjoy the silence.

Novibrasyon Marin produces marine engine mounts and shaft bearings in Istanbul and ships them worldwide. Every mount in this catalogue is made to reduce engine vibration and noise, help keep the engine in line, and stand up to salt water and long hours at sea.

FIND IT FAST

How a mount works	Technical introduction	p. 5
Engine finder	Look up your engine	p. 6
Part number finder	Your old mount	p. 8
Mount positions	Which mount goes where	p. 9
How to order	Three simple steps	p. 52

IN THIS CATALOGUE

01	**Yanmar Engine Mounts**	p. 11
02	**Saildrive Mounts**	p. 31
03	**Cummins Engine Mounts**	p. 35
04	**Universal Mounts**	p. 41
	Shaft bearings	p. 51

Less vibration

Bonded rubber elements absorb engine vibration before it reaches the hull.

Built for salt water

Galvanized steel, 316 stainless steel and marine-grade aluminum bodies.

2–4 business days

FedEx or UPS Express, insured and tracked. Depends on destination and customs.

TECHNICAL INTRODUCTION

From vibration to silence.

A diesel engine shakes with every firing stroke. An engine mount is a rubber spring between the engine and the hull: it carries the weight of the engine and gearbox, keeps the shaft in line and stops most of the vibration before it reaches the boat.

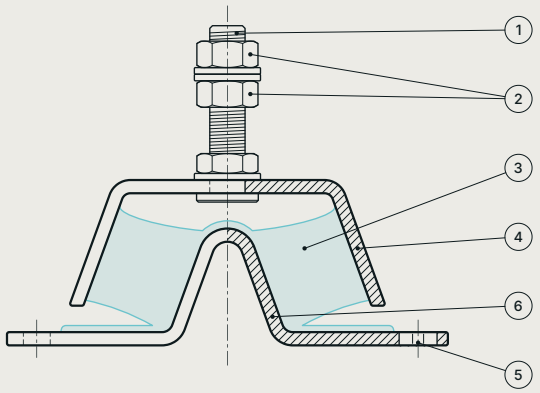

INSIDE A NOVIBRASYON MOUNT

1. **Stud**
   Carries the engine foot.
2. **Adjusting nuts**
   Set the engine height for shaft alignment.
3. **Rubber element**
   Absorbs the vibration. Its hardness is given in Shore.
4. **Metal housing**
   Holds the rubber and takes the load.
5. **Base flange**
   Bolted to the engine bed.
6. **Centre core**
   The raised centre of the base plate, bonded into the rubber.

CHOOSING THE RIGHT MOUNT

1 Engine model
Find your engine in the engine finder (page 6). It shows the right mount for your engine.

2 Load at each mount
Engine and gearbox weight, shared between the mounts. The rear mounts often carry more, because the gearbox sits there.

3 Fit
Stud thread, mounting hole centers and height must match your engine feet and engine bed.

4 Rubber hardness
Chosen by the load at each mount: softer for light loads, harder for heavy ones.

RUBBER HARDNESS IN SHORE

SOFTER — HARDER

45 Shore
Soft
Best isolation, for lighter loads.

55 Shore
Medium
Balanced isolation and load capacity.

65 Shore
Hard
Firm support for the heaviest loads.

WHEN IS IT TIME TO REPLACE?

- Cracked, split or crumbling rubber
- The engine sits lower than before or the mount has collapsed
- More vibration or noise, knocking when shifting gear
- Rubber coming away from the metal
- Soft, swollen rubber from oil or diesel
- Shaft seal or shaft bearing wearing fast, shaft out of line

> Mounts age together: when one has failed, check all of them. After fitting new mounts, check the shaft alignment at the coupling and tighten the nuts to the recommended torque.

ENGINE FINDER

Find your mount.

Find your engine brand and model in the table: each box shows the mount code and its page. The engine model is on the name plate or in the engine manual.

Yanmar

1GM	**50** | p. 12	**70** | p. 14
2GM series 2GM · 2GMF · 2GM20 · 2GM20B · 2GM20F	**75** | p. 16	**100** | p. 18
2YM15	**75** | p. 16	**100** | p. 18
3GM series 3GM · 3GMF · 3GMD · 3GMDF · 3GM30 · 3GM30B · 3GM30F	**75** | p. 16	**100** | p. 18
3YM series 3YM20 · 3YM30 · 3YM30AE	**75** | p. 16	**100** | p. 18
3JH series 3JH2 · 3JH2BE · 3JH2TBE · 3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE · 3JH40	**100** | p. 18	**150** | p. 22
4JH series 4JH-E · 4JH-TE · 4JH-HTE · 4JH-DTE · 4JH2 · 4JH2E · 4JH2TE · 4JH2BE · 4JH2TBE · 4JH2HTE · 4JH2DTE · 4JH2UTBE · 4JH2UTE · 4JH3E · 4JH4 · 4JH4-E · 4JH4-AE · 4JH5E · 4JH45 · 4JH57	**150** | p. 22	**200** | p. 24
4JH3 / 4JH4 turbo · 4JH80 · 4JH110 4JH3-TE · 4JH3-HTE · 4JH3-DTE · 4JH4-TE · 4JH4-HTE · 4JH80 · 4JH110	**200** | p. 24	
4LHA series 4LHA-HTP · 4LHA-DTP · 4LHA-STP	**400** | p. 26	**VV3** 55 Shore | p. 46
4LH series	**VV3** 55 Shore | p. 46	
6LP · 6LY · 6LF 6LPA-STP2 · 6LPA-STC · 6LY2M-WDT · 6LY2A-UTP · 6LY2M-WST · 6LY400 · 6LY440 · 6LY2A-STP · 6LF550	**500** | p. 28	**VV3** 55 Shore 6LP | p. 46

Yanmar saildrive

2GM · 2GM20 · 2GM20F · 2YM15 with SD20 · SD25	**SD150** | p. 32
3YM20 · 3YM30 · 3GM30 · 3HM35 with SD20 · SD25 · SD30	**SD230** | p. 32
3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE with SD31 · SD40 · SD50	**SD230** | p. 32
4JH3E · 4JH3TE · 4JH4E · 4JH4AE · 4JH4TE with SD40 · SD50	**SD430** | p. 32

Cummins

6B 5.9	**450** | p. 36	
6BT · 6BTA 5.9	**450** | p. 36	**VV3** 55 Shore | p. 46

ENGINE FINDER · 2 OF 2

Cummins continued	
QSB 5.9	600 | p. 38 VV3 55 Shore | p. 46
QSB 6.7	500 | p. 28
6CTA 8.3 · QSC 8.3 · QSL9	500 | p. 28 600 | p. 38 VV3 65 Shore | p. 46
QSM11	600 | p. 38 VV3 65 Shore | p. 46
4BT	VV3 55 Shore | p. 46
Caterpillar	
3116 · 3126 · C7	500 | p. 28 VV3 65 Shore | p. 46
C9	VV3 65 Shore | p. 46
3056 · C4.4	VV3 55 Shore | p. 46
John Deere	
Selected marine engines	500 | p. 28
Volvo Penta	
D2 · D3 · TAMD30 · 31 · 41 · KAD · KAMD	VV2 | p. 44
D4 · D6 · TAMD 63 · 71–75 · D9	VV3 55 Shore D4 · D6 | p. 46 VV3 65 Shore TAMD · D9 | p. 46
Selected installations	VV1 | p. 42
MAN	
D2866 · D2876	VV3 | p. 46
D2848 · D2840 · D2842 · D0836 · D0826	VV3 65 Shore | p. 46
Selected installations	VV2 | p. 44 VV3 55 Shore | p. 46
Perkins / Sabre	
M92 · M115 · M130	VV3 55 Shore | p. 46
Selected installations	VV1 | p. 42 VV2 | p. 44
Universal Mounts	
Mercruiser · Beta Marine Selected installations	VV1 | p. 42
Yanmar · Cummins · Caterpillar Selected installations	VV2 | p. 44
Any marine engine Chosen by the load at each mount	VV1 | p. 42 VV2 | p. 44 VV3 | p. 46 MT | p. 48

PART NUMBER FINDER

Have a part number?

Find the original part number on your old mount or in your engine manual, then look it up here.

Yanmar

50 p. 12	128170-08340
70 p. 14	128170-08350
75 p. 16	128270-08340
75 p. 16	128270-08341
75 p. 16	128377-08340
75 p. 16	128377-08341
100 p. 18	124772-08341
100 p. 18	128377-08351
150 p. 22	121370-08351
200 p. 24	129470-08350
200 p. 24	129670-08341
400 p. 26	119175-08440
400 p. 26	519175-08300
500 p. 28	119773-08300
500 p. 28	119773-08310
SD150 p. 32	129795-08340
SD230 p. 32	196420-02310
SD430 p. 32	196440-02380

Cummins

450 p. 36	3349230
500 p. 28 · 600 p. 38	3393853
500 p. 28 · 600 p. 38	3968021
600 p. 38	3964883

Cummins, continued

600 p. 38	4931364
600 p. 38	5301975

Caterpillar

500 p. 28	139-1502

MAN

VV3 p. 46	51.96210-7001
VV3 p. 46	51.96210-7002
VV3 p. 46	51.96210-7003
VV3 p. 46	51.96210-7004
VV3 p. 46	51.96210-7031
VV3 p. 46	51.96210-7032
VV3 p. 46	51.96210-7033
VV3 p. 46	51.96210-7035
VV3 p. 46	51.96210-7037

Barry Controls

450 p. 36	27655-2
500 p. 28	27391-8
500 p. 28	27391-9
500 p. 28	28717-2

Trelleborg / Metalastik

VV3 p. 46	17-1657-00
VV3 p. 46	17-1657-01
VV3 p. 46	17-1657-02
VV3 p. 46	17-1657-03

MOUNT POSITIONS · SHAFT-DRIVE ENGINES

Which mount goes where?

Seen from above: the back is the stern side, where the gearbox and shaft are; the front is the bow side. On some engines the port and starboard mounts are different models.

Yanmar 1GM · 1GM10

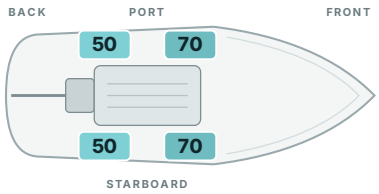

Back: 50 × 2 · Front: 70 × 2

50 p. 12 70 p. 14

Yanmar 2GM · 3GM · 2YM15 · 3YM

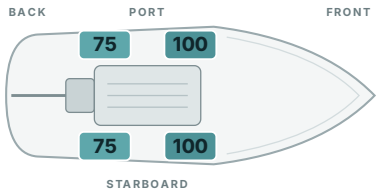

Back: 75 × 2 · Front: 100 × 2

75 p. 16 100 p. 18

Yanmar 2GM20V · 3GM30V (V-drive) · 3HM · 3HM35

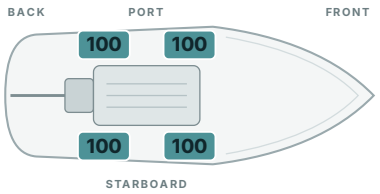

100 × 4

100 p. 18

Yanmar 3JH series

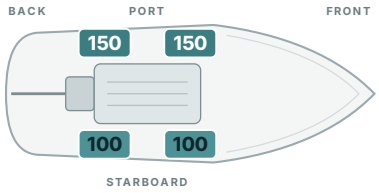

Port: 150 × 2 · Starboard: 100 × 2

100 p. 18 150 p. 22

Yanmar 4JH series

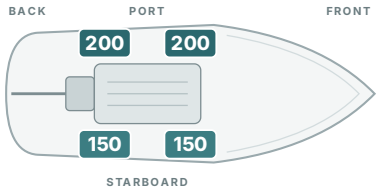

Port: 200 × 2 · Starboard: 150 × 2

150 p. 22 200 p. 24

Yanmar 4JH3 · 4JH4 turbo · 4JH80 · 4JH110

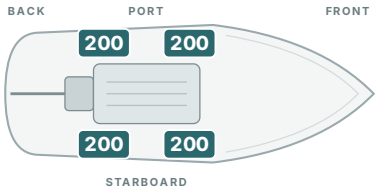

200 × 4

200 p. 24

Yanmar 4LHA series

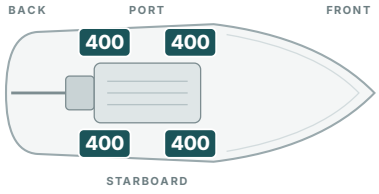

400 × 4

400 p. 26

Yanmar 6LP · 6LY · 6LF

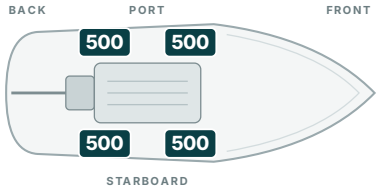

500 × 4

500 p. 28

Cummins 6B · 6BT · 6BTA 5.9

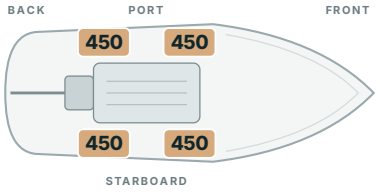

450 × 4

450 p. 36

Positions follow the original Yanmar mount arrangement. Port is the left side and starboard the right side when looking forward. If your engine is not listed, send us a photo of your old mounts.

MOUNT POSITIONS · SAILDRIVE AND OTHER ENGINES

Saildrive and other engines.

With a saildrive, one saildrive mount carries the back of the engine and two engine mounts carry the front.

Yanmar 1GM10 with saildrive

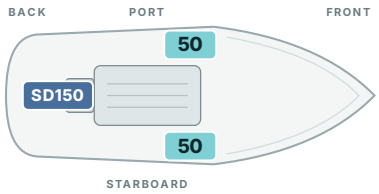

Front: 50 × 2 · Saildrive: SD150

50 p. 12 SD150 p. 32

Yanmar 2GM20 with SD20

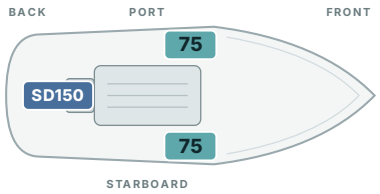

Front: 75 × 2 · Saildrive: SD150

75 p. 16 SD150 p. 32

Yanmar 2YM15 with saildrive

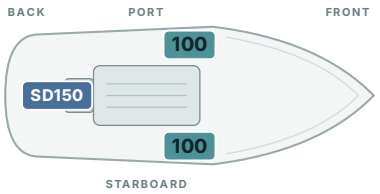

Front: 100 × 2 · Saildrive: SD150

100 p. 18 SD150 p. 32

Yanmar 3YM · 3GM30 · 3HM35 with SD20 · SD25 · SD30

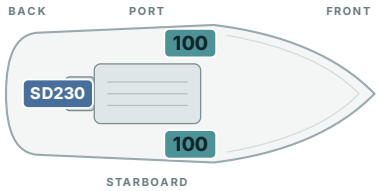

Front: 100 × 2 · Saildrive: SD230

100 p. 18 SD230 p. 32

Yanmar 3JH with SD31 · SD40 · SD50

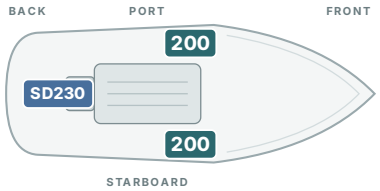

Front: 200 × 2 · Saildrive: SD230

200 p. 24 SD230 p. 32

Yanmar 4JH with SD40 · SD50

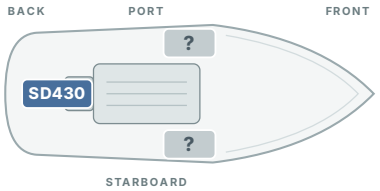

Saildrive: SD430 · Front mounts: ask us

SD430 p. 32

Cummins QSB 5.9 · 6CTA 8.3 · QSC 8.3 · QSL9 · QSM11

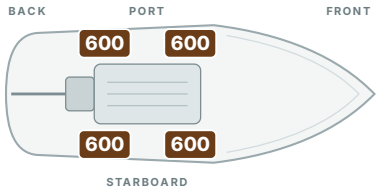

600 × 4 (6CTA 8.3, QSC 8.3 and QSL9 also 500)

600 p. 38

Cummins QSB 6.7 · Caterpillar 3116 · 3126 · C7

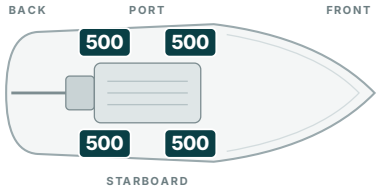

500 × 4

500 p. 28

Volvo Penta · Perkins · MAN and other engines

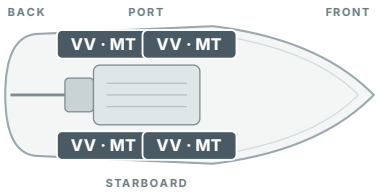

Universal mounts: the same model at all four positions; the Shore hardness is chosen by the load at each mount

VV1 p. 42 VV2 p. 44
VV3 p. 46 MT p. 48

For larger engines the same model is used at all four positions; please confirm with the part number of your old mount. Not sure? Send us your engine model or a photo.

01

Yanmar Engine Mounts

Replacement mounts for Yanmar 1GM, 2GM, 3GM, 2YM, 3YM, 3JH, 4JH, 4LHA and 6LP / 6LY engines. The 75, 100, 150 and 200 come in galvanized steel or 316 stainless steel.

Novibrasyon 50	Used together with the 70 on the Yanmar 1GM.	**p. 12**
Novibrasyon 70	Used together with the 50 on the Yanmar 1GM.	**p. 14**
Novibrasyon 75	For Yanmar 2GM, 3GM, 2YM and 3YM.	**p. 16**
Novibrasyon 100	For Yanmar 2GM, 3GM, 2YM, 3YM and 3JH.	**p. 18**
Novibrasyon 150	Made for higher engine loads.	**p. 22**
Novibrasyon 200	For the Yanmar 4JH series, turbo 4JH3 / 4JH4, 4JH80 and 4JH110.	**p. 24**
Novibrasyon 400	Aluminum strength for the Yanmar 4LHA.	**p. 26**
Novibrasyon 500	For Yanmar 6LP / 6LY, Cummins and Caterpillar.	**p. 28**

YANMAR 01

Novibrasyon

50

Used together with the 70 on the Yanmar 1GM.

A marine engine mount designed to reduce vibration and support stable engine alignment on Yanmar 1GM engines.

50 kg	M14 × 1.5	159 mm	127.5 mm
Max. load per mount	Stud thread	Base length	Hole centers

FITS THESE ENGINES

Yanmar	1GM

REPLACES PART NUMBERS

Yanmar
128170-08340

KEY FEATURES

- Bonded rubber element designed to reduce engine vibration and noise
- Durable construction for marine environments
- Helps support stable engine alignment

NOVIBRASYON 50

Dimensions & technical data

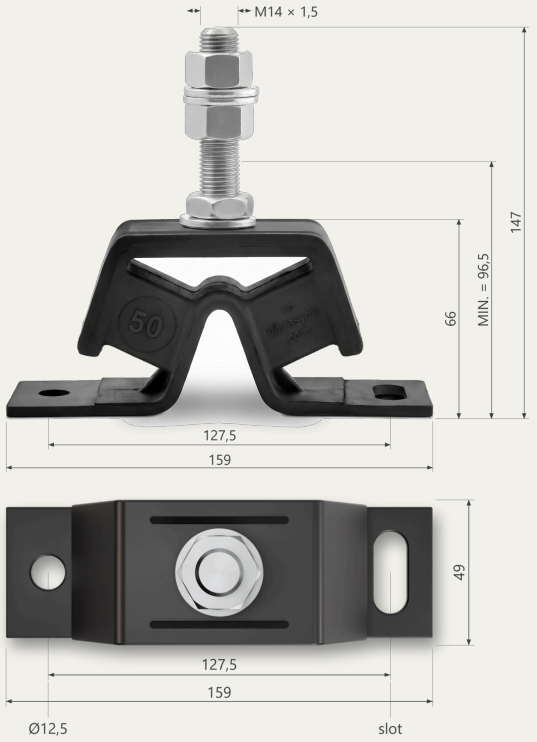

Natural frequency curve

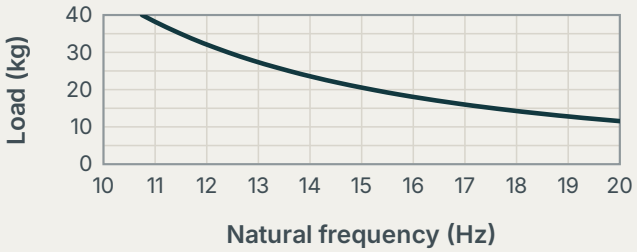

Load-deflection curve

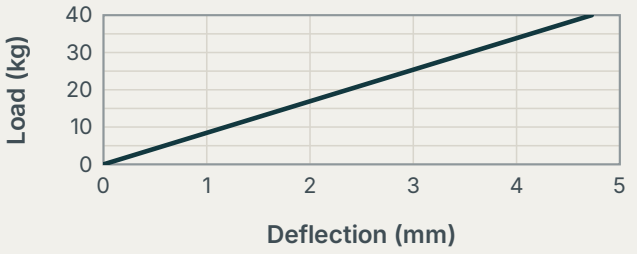

DIMENSIONS

Stud thread	**M14 × 1.5**	Base length	**159 mm**	Hole centers	**127.5 mm**
Holes	**Ø12.5 mm + slot**	Body height	**66 mm**	Min. height	**96.5 mm**
Total height	**147 mm**				

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

70

Used together with the 50 on the Yanmar 1GM.

A marine engine mount designed to reduce vibration and support stable engine alignment on Yanmar 1GM engines.

70 kg	M14 × 1.5	159 mm	127.5 mm
Max. load per mount	Stud thread	Base length	Hole centers

FITS THESE ENGINES

Yanmar	1GM

REPLACES PART NUMBERS

Yanmar
128170-08350

KEY FEATURES

- Bonded rubber element designed to reduce engine vibration
- Designed for use in marine environments
- Helps support stable engine alignment

NOVIBRASYON 70

Dimensions & technical data

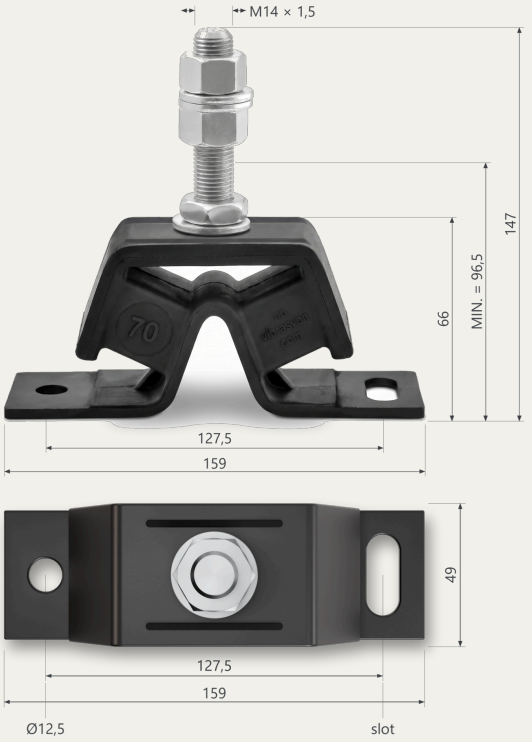

Natural frequency curve

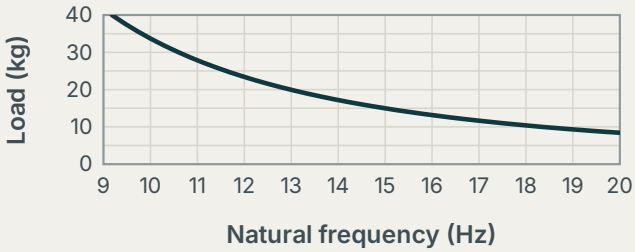

Load-deflection curve

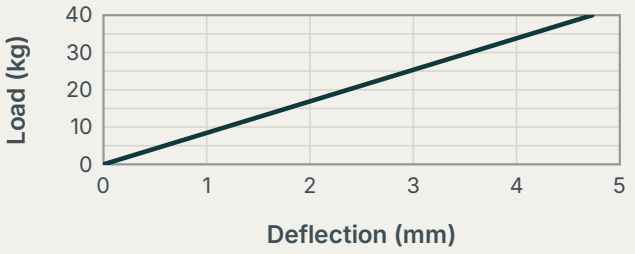

DIMENSIONS

Stud thread	**M14 × 1.5**	Base length	**159 mm**	Hole centers	**127.5 mm**
Holes	**Ø12.5 mm + slot**	Body height	**66 mm**	Min. height	**96.5 mm**
Total height	**147 mm**				

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

75

For Yanmar 2GM, 3GM, 2YM and 3YM.

A marine engine mount designed to reduce vibration and support stable engine alignment in the Yanmar applications listed below.

● Galvanized steel

○ 316 stainless steel

M16 × 1.5	200 mm	173 mm	75 mm
Stud thread	Base length	Hole centers	Body height

FITS THESE ENGINES

2GM series	2GM · 2GM20 · 2GM20B · 2GM20F · 2GMF
2YM series	2YM15
3GM series	3GM · 3GM30 · 3GM30B · 3GM30F · 3GMD · 3GMDF · 3GMF
3YM series	3YM20 · 3YM30 · 3YM30AE

REPLACES PART NUMBERS

Yanmar

128270-08341 128270-08340 128377-08340 128377-08341

KEY FEATURES

- Bonded rubber element designed to reduce engine vibration and movement
- Galvanized steel body with corrosion protection for marine use
- Helps support stable engine alignment
- 316 stainless steel option for demanding saltwater environments

NOVIBRASYON 75

Dimensions & technical data

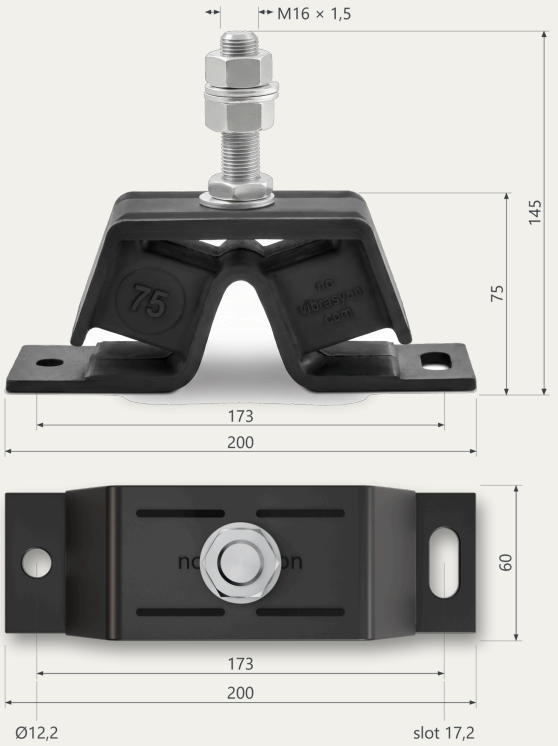

Natural frequency curve

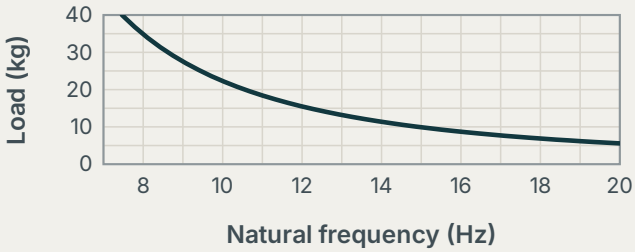

Load-deflection curve

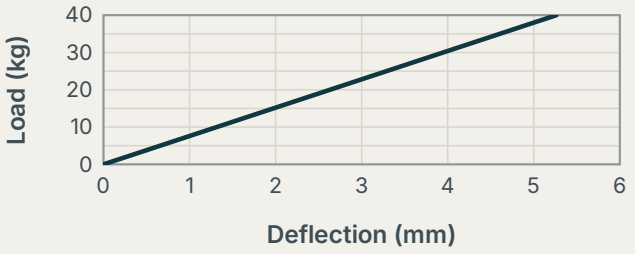

DIMENSIONS

Stud thread	**M16 × 1.5**	Base length	**200 mm**	Hole centers	**173 mm**
Holes	**Ø12.2 mm + 17.2 mm slot**	Body height	**75 mm**	Total height	**145 mm**

AVAILABLE BODY OPTIONS ● Galvanized steel ○ 316 stainless steel

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

100

For Yanmar 2GM, 3GM, 2YM, 3YM and 3JH.

A marine engine mount designed to reduce vibration and support stable engine alignment in the Yanmar applications listed below.

● Galvanized steel

○ 316 stainless steel

M16 × 1.5	200 mm	173 mm	75 mm
Stud thread	Base length	Hole centers	Body height

FITS THESE ENGINES

2GM · 3GM · 2YM · 3YM	2GM · 2GMF · 2GM20 · 2GM20B · 2GM20F · 3GM · 3GMF · 3GMD · 3GMDF · 3GM30 · 3GM30B · 3GM30F · 2YM15 · 3YM20 · 3YM30 · 3YM30AE
3JH engines	3JH2 · 3JH2BE · 3JH2TBE · 3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE · 3JH40
V-drive · 3HM	2GM20V · 2GM20FV · 3GM30V · 3GM30FV · 3HM · 3HMF · 3HM35 · 3HM35F

REPLACES PART NUMBERS

Yanmar

124772-08341 128377-08351

KEY FEATURES

- Bonded rubber element designed to reduce engine vibration and movement
- Galvanized steel body with corrosion protection for marine use
- Helps support stable engine alignment
- 316 stainless steel option for demanding saltwater environments

NOVIBRASYON 100

Dimensions & technical data

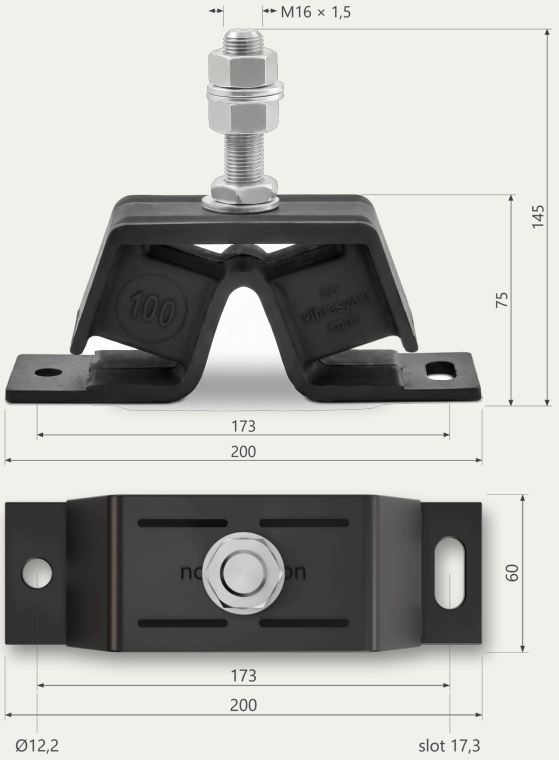

Natural frequency curve

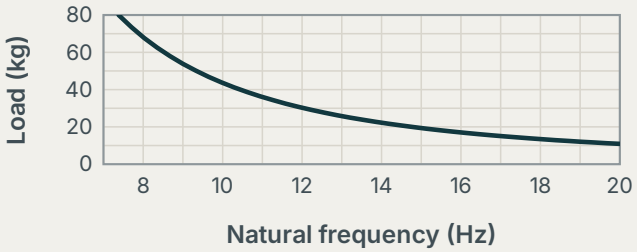

Load-deflection curve

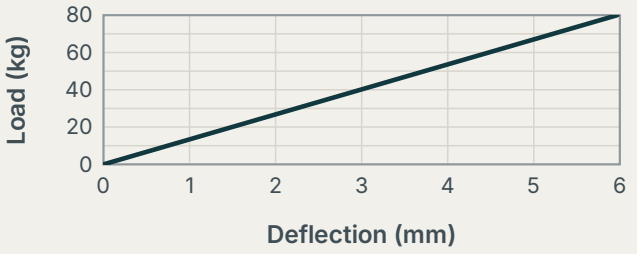

DIMENSIONS

Stud thread	**M16 × 1.5**	Base length	**200 mm**	Hole centers	**173 mm**
Holes	**Ø12.2 mm + 17.3 mm slot**	Body height	**75 mm**	Total height	**145 mm**

AVAILABLE BODY OPTIONS ● Galvanized steel ○ 316 stainless steel

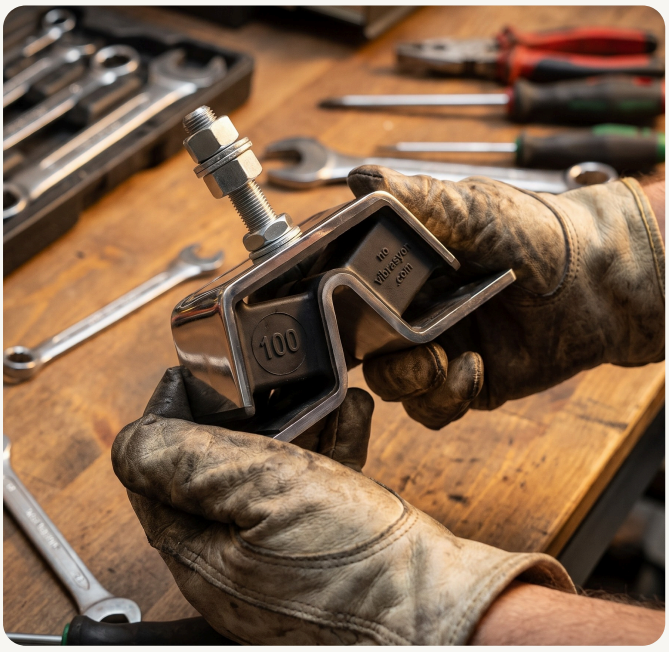

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

★ 5,0 CUSTOMER REVIEWS · EBAY

5,0

★★★★★

100% Positive Ratings

EBAY · NOVIBRASYON MARIN

★★★★★

"I ordered four engine mounts to replace the old ones on my Yanmar 4 JH2-DTE. Two days later, I received those from Istanbul, ..."

Canada eBay User

★★★★★

"Could not ask for better service to the UK - fantastic quality and speed of service first rate, wouldnt hesitate to order ..."

United Kingdom eBay User

★★★★★

"Excellent service and great communication. The order was shipped the same day and received a few days earlier than ..."

United Kingdom eBay User

★★★★★

"I purchased these on a Monday with a 7 day delivery promise. (Istanbul Turkey to San Diego US) The package arrived in 3 days ..."

USA eBay User

★ 5,0 CUSTOMER REVIEWS · EBAY

5,0

★★★★★

100% Positive Ratings

EBAY · NOVIBRASYON MARIN

★★★★★

"Vendedor súper recomendable. Se le ha preguntado por los soportes y la respuesta ha sido inmediata. El producto llegó en ..."

Spain eBay User

★★★★★

"Persona gentilissima ha risolto tutti i miei dubbi e problemi per poter acquistare il prodotto 5 stelle sono veramente poche ..."

Italy eBay User

★★★★★

"Thank you for a very fast delivery and high-grade products well packed in high quality sealed packings. We are very pleased ..."

Finland eBay User

Novibrasyon

150

Made for higher engine loads.

A marine engine mount designed for higher engine loads, vibration reduction and stable engine alignment on Yanmar 3JH and 4JH engines.

● Galvanized steel

○ 316 stainless steel

M16 × 1.5	200 mm	173 mm	75 mm
Stud thread	Base length	Hole centers	Body height

FITS THESE ENGINES

3JH series	3JH2 · 3JH2BE · 3JH2TBE · 3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE · 3JH40
4JH series	4JH-E · 4JH-TE · 4JH-HTE · 4JH-DTE · 4JH2 · 4JH2E · 4JH2TE · 4JH2BE · 4JH2TBE · 4JH2HTE · 4JH2DTE · 4JH2UTBE · 4JH2UTE · 4JH3E · 4JH4 · 4JH4-E · 4JH4-AE · 4JH5E · 4JH45 · 4JH57

REPLACES PART NUMBERS

Yanmar

121370-08351

KEY FEATURES

- Designed for higher engine loads
- Galvanized steel body with corrosion protection for marine use
- Bonded rubber element designed to reduce vibration and engine movement
- 316 stainless steel option for demanding saltwater environments

NOVIBRASYON 150

Dimensions & technical data

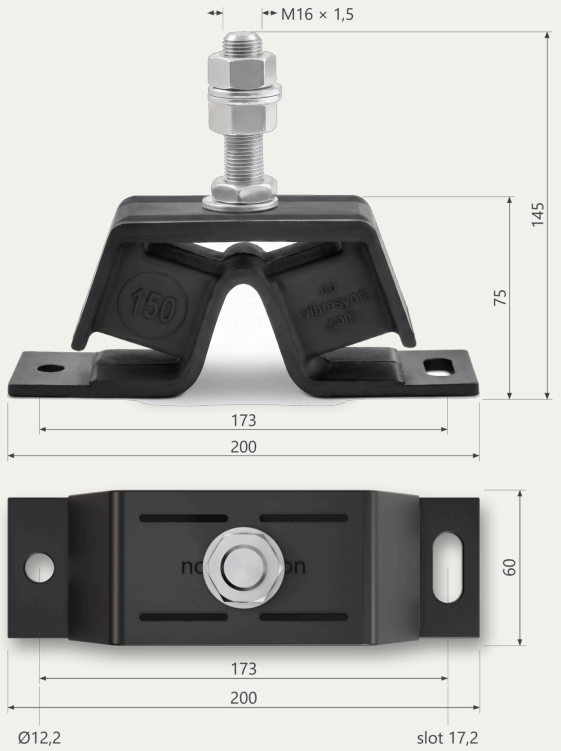

Natural frequency curve

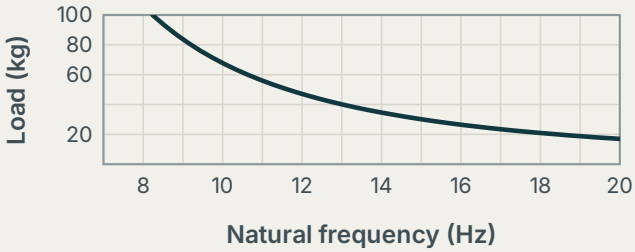

Load-deflection curve

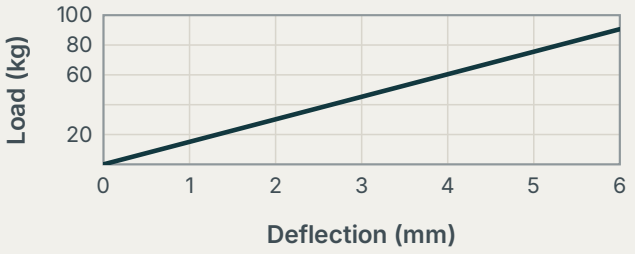

DIMENSIONS

Stud thread	**M16 × 1.5**	Base length	**200 mm**	Hole centers	**173 mm**
Holes	**Ø12.2 mm + 17.2 mm slot**	Body height	**75 mm**	Total height	**145 mm**

AVAILABLE BODY OPTIONS ● Galvanized steel ○ 316 stainless steel

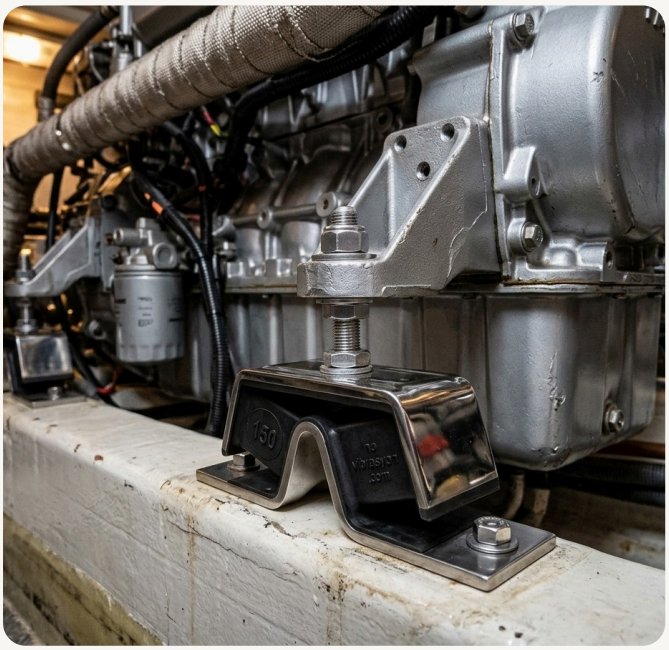

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

200

For the Yanmar 4JH series, turbo 4JH3 / 4JH4, 4JH80 and 4JH110.

A marine engine mount designed to reduce vibration and support stable engine alignment in Yanmar 4JH applications.

● Galvanized steel

○ 316 stainless steel

M16 × 1.5	205 × 60 mm	174 mm	76 mm
Stud thread	Base (L × W)	Hole centers	Body height

FITS THESE ENGINES

4JH series	4JH-E · 4JH-TE · 4JH-HTE · 4JH-DTE · 4JH2 · 4JH3E · 4JH4-E · 4JH4-AE · 4JH5E · 4JH45 · 4JH57
4JH3 series	4JH3-TE · 4JH3-HTE · 4JH3-DTE
4JH4 series	4JH4-TE · 4JH4-HTE
4JH80 / 4JH110	4JH80 · 4JH110

REPLACES PART NUMBERS

Yanmar

129470-08350 129670-08341

KEY FEATURES

- Bonded rubber element designed to reduce engine vibration and movement
- Galvanized steel body with corrosion protection for marine use
- Helps support stable engine alignment
- 316 stainless steel option for demanding saltwater environments

NOVIBRASYON 200

Dimensions & technical data

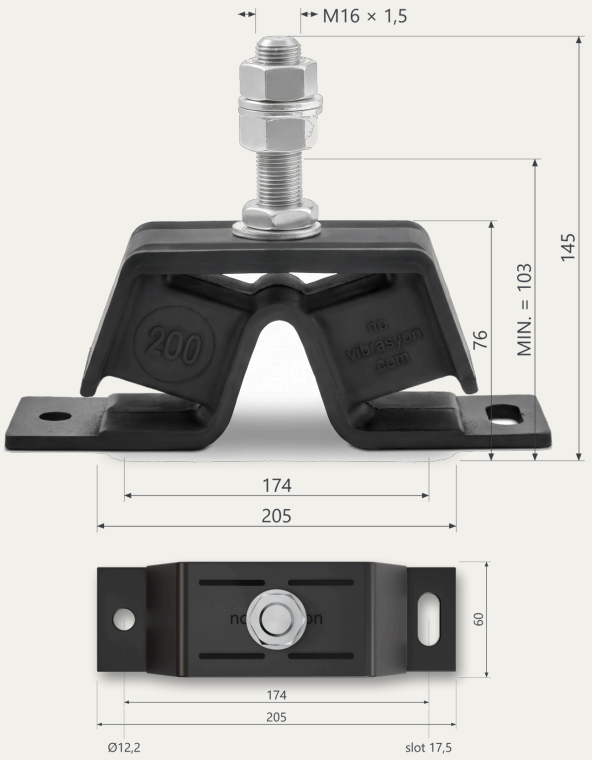

Natural frequency curve

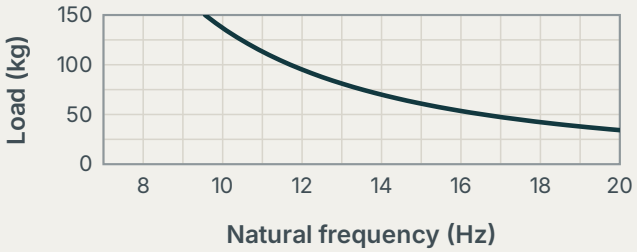

Load-deflection curve

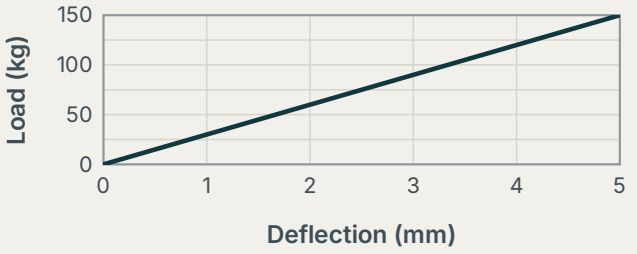

DIMENSIONS

Stud thread	**M16 × 1.5**	Base (L × W)	**205 × 60 mm**	Hole centers	**174 mm**
Holes	**Ø12.2 mm + 17.5 mm slot**	Body height	**76 mm**	Min. height	**103 mm**
Total height	**145 mm**				

AVAILABLE BODY OPTIONS ● Galvanized steel ○ 316 stainless steel

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

400

Aluminum strength for the Yanmar 4LHA.

A marine engine mount designed to reduce vibration and help maintain stable engine alignment.

M20	166 × 66 mm	127 mm	80 mm
Stud thread	Base (L × W)	Hole centers	Body height

FITS THESE ENGINES

Yanmar	4LHA-HTP	4LHA-DTP	4LHA-STP

REPLACES PART NUMBERS

Yanmar

519175-08300 119175-08440

Novibrasyon 400 is our product model designation.

KEY FEATURES

- Marine-grade aluminum body with corrosion-resistant construction
- Helps support stable engine alignment
- Bonded rubber element designed to reduce engine vibration and noise
- Designed for the demanding conditions of marine use

NOVIBRASYON 400

Dimensions & technical data

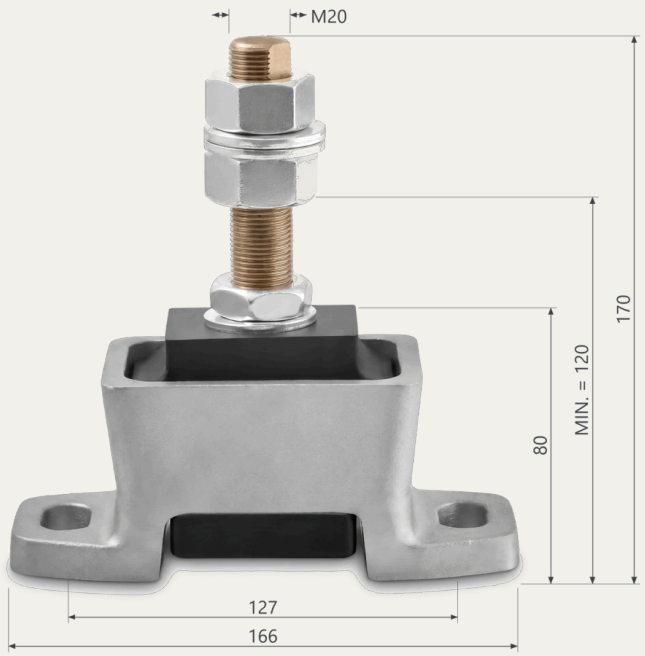

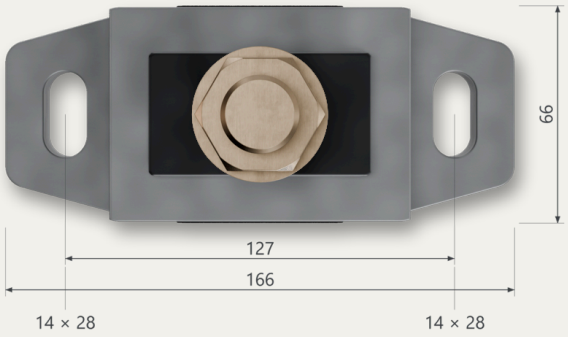

DIMENSIONS

Stud thread	**M20**	Base (L × W)	**166 × 66 mm**	Hole centers	**127 mm**
Holes	**2 slots, 14 × 28 mm**	Body height	**80 mm**	Min. height	**120 mm**
Total height	**170 mm**				

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

500

For Yanmar 6LP / 6LY, Cummins and Caterpillar.

A marine engine mount designed to reduce vibration and support stable engine alignment.

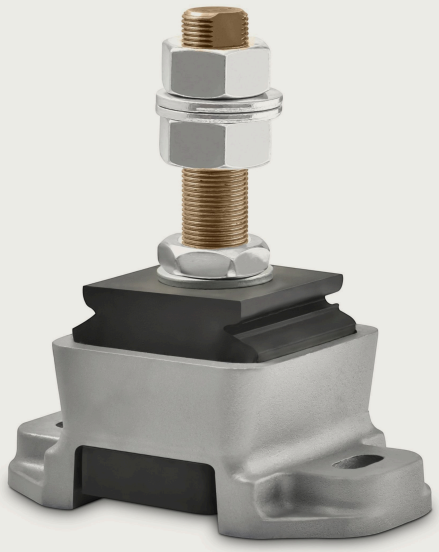

1″ × 14 TPI	166 × 93 mm	127 mm	90 mm
Stud thread	Base (L × W)	Hole centers	Body height

FITS THESE ENGINES

Yanmar	6LPA-STP2 · 6LPA-STC · 6LY2M-WDT · 6LY2A-UTP · 6LY2M-WST · 6LY400 · 6LY440 · 6LY2A-STP · 6LF550
Cummins	6CTA 8.3 · QSC 8.3 · QSL9 · QSB 6.7
Caterpillar	3116 · 3126 · C7
John Deere	Selected marine engine applications

The mount may also suit other marine engines when the mounting dimensions and load requirements match.

REPLACES PART NUMBERS

Yanmar
119773-08300 119773-08310

Cummins
3968021 3393853

Caterpillar
139-1502

Barry Controls
27391-8 27391-9 28717-2

KEY FEATURES

- Marine-grade aluminum body with corrosion-resistant construction
- Helps support stable engine alignment
- Bonded rubber element designed to reduce vibration transfer
- Designed for use in humid and saltwater marine environments

NOVIBRASYON 500

Dimensions & technical data

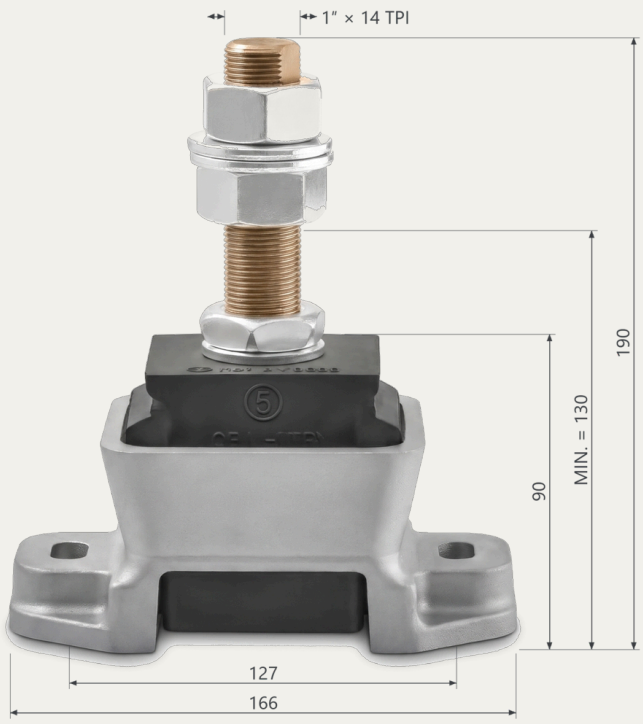

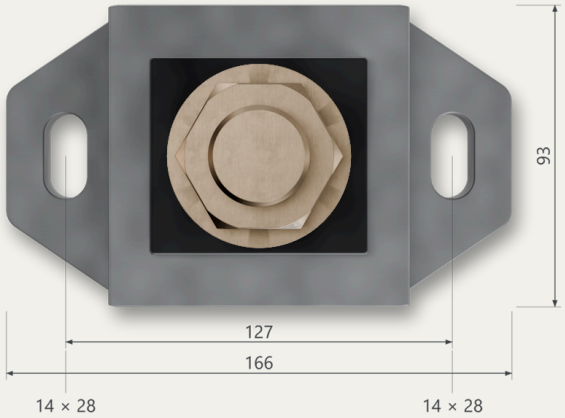

DIMENSIONS

Stud thread	**1'' × 14 TPI**	Base (L × W)	**166 × 93 mm**	Hole centers	**127 mm**
Holes	**2 slots, 14 × 28 mm**	Body height	**90 mm**	Min. height	**130 mm**
Total height	**190 mm**				

The drawing shows an M24 stud; the stud thread can differ by installation. Please confirm before ordering.

Not sure it fits? Please confirm the existing mount part number, stud thread and engine load before ordering. Yanmar installations may use a different stud specification. For help confirming fitment, please send us your engine model and the part number or a photo of your current mount.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

★ 5,0 CUSTOMER REVIEWS · EBAY

5,0

★★★★★

100% Positive Ratings

EBAY · NOVIBRASYON MARIN

★★★★★

"First class service email acknowledged in 2 minutes problem resolved within 10 minutes would not hesitate in recommending ..."

USA eBay User

★★★★★

"Very impressed with the seller. Packaging and postage was absolutely spot on! No problems receiving updates etc! My engine ..."

United Kingdom eBay User

★★★★★

"Good price. Very helpful. I ordered them and put the wrong address in immediately canceled it and ordered it again and they ..."

USA eBay User

02

Saildrive Mounts

Rear mounts for the gearbox / saildrive side of Yanmar saildrive installations, from SD20 to SD50.

Novibrasyon SD150 Saildrive	For Yanmar 2GM and 2YM15 with SD20 / SD25.	**p. 32**
Novibrasyon SD230 Saildrive	For Yanmar 3YM, 3GM, 3HM and 3JH with SD20 to SD50.	**p. 32**
Novibrasyon SD430 Saildrive	For Yanmar 4JH with SD40 / SD50.	**p. 32**

SD150

SD230

SD430

Typical saildrive layout: the saildrive mount supports the gearbox / saildrive side at the back and two engine mounts carry the front. The front mount model depends on the engine — see the engine finder or ask us.

Novibrasyon Saildrive

SD

Three saildrive mounts, SD20 to SD50.

Saildrive mounts for Yanmar saildrive installations. The SD150, SD230 and SD430 share the same mounting dimensions and differ in load capacity; choose by engine and saildrive.

SD150

SD230

SD430

SD20–SD50
Yanmar saildrive

SD150 · SD230 · SD430
Three models

M12
Studs, top and bottom

SAILDRIVE 01

FITS THESE ENGINES

SD150 SD20 · SD25	2GM · 2GM20 · 2GM20F · 2YM15
SD230 SD20 · SD25 · SD30	3YM20 · 3YM30 · 3GM30 · 3HM35
SD230 SD31 · SD40 · SD50	3JH2E · 3JH2TE · 3JH3E · 3JH4E · 3JH5E · 3JH5AE
SD430 SD40 · SD50	4JH3E · 4JH3TE · 4JH4E · 4JH4AE · 4JH4TE

KEY FEATURES

- Bonded rubber element designed to reduce vibration and noise
- One mount per saildrive
- Supports the engine at the gearbox / saildrive side

NOVIBRASYON SD SAILDRIVE SERIES

Dimensions & technical data

Natural frequency curve

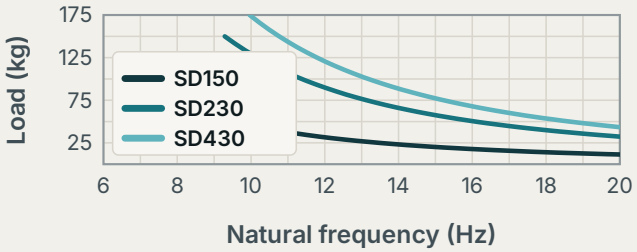

Load-deflection curve

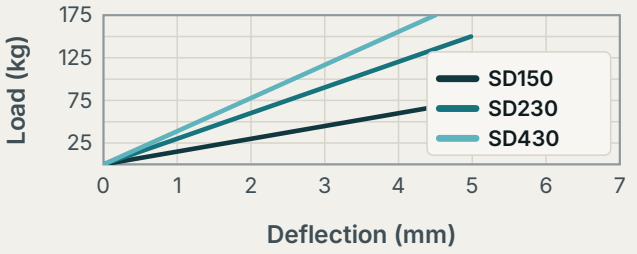

DIMENSIONS

	SD150	SD230	SD430
Yanmar part no.	**129795-08340**	**196420-02310**	**196440-02380**
Studs	**M12, top and bottom**	**M12, top and bottom**	**M12, top and bottom**
Base (L × W)	**130 × 61 mm**	**130 × 61 mm**	**130 × 61 mm**
Height	**64 mm**	**64 mm**	**64 mm**

Typical saildrive layout: the saildrive mount supports the gearbox / saildrive side at the back and two engine mounts carry the front. The front mount model depends on the engine — see the engine finder or ask us.

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

★ 5,0 CUSTOMER REVIEWS · EBAY

5,0

★★★★★

100% Positive Ratings

EBAY · NOVIBRASYON MARIN

★★★★★

"Super Service, Samstags bestellt, Sonntag früh die Bestellung geändert, Sonntag Mittag wurde die Bestellung mit der Änderung ..."

Germany eBay User

★★★★★

"Die Lieferung war zu schnell für mich, ich war von einer längeren Lieferzeit ausgegangen. Die Motorfüße sind genau richtig. ..."

Germany eBay User

★★★★★

"Beautiful engine mounts. The polished stainless steel look fantastic. Fast shipping to USA. Highly recommend."

USA eBay User

03

Cummins Engine Mounts

Block mounts for Cummins 5.9, 6CTA 8.3, QSC 8.3, QSL9, QSB and QSM11 marine diesels.

Novibrasyon 450	Heavy-duty support for the Cummins 5.9.	**p. 36**
Novibrasyon 600	Engine and gearbox, held in line.	**p. 38**

Novibrasyon

450

Heavy-duty support for the Cummins 5.9.

A marine engine mount designed to reduce vibration and help maintain stable engine and drivetrain alignment.

M20	165 × 85 mm	127 mm	72 mm
Stud thread	Base (L × W)	Hole centers	Body height

FITS THESE ENGINES

Cummins	6B 5.9 · 6BT 5.9 · 6BTA 5.9

REPLACES PART NUMBERS

Cummins	Barry Controls
3349230	**27655-2**

KEY FEATURES

- Durable construction for marine diesel applications
- Helps reduce vibration transfer to the hull and drivetrain
- Bonded rubber element designed to reduce engine vibration and noise
- Designed for use in demanding marine environments

NOVIBRASYON 450

Dimensions & technical data

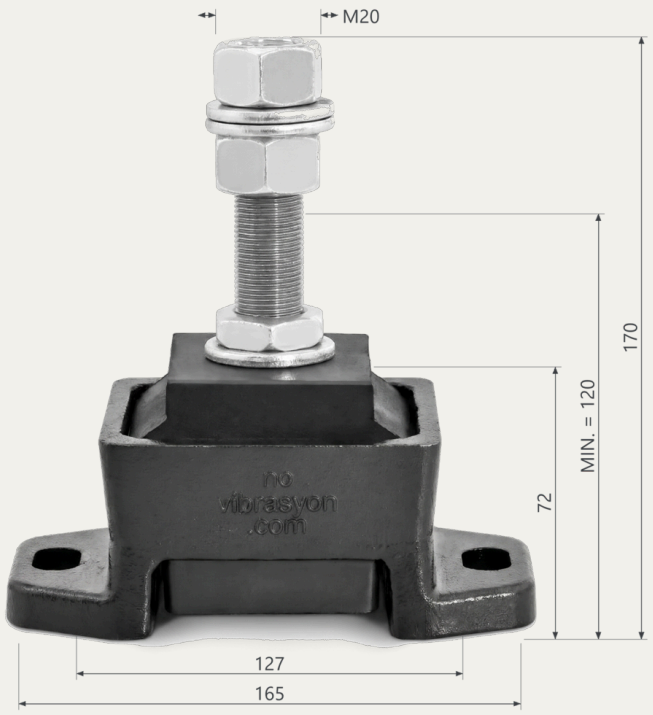

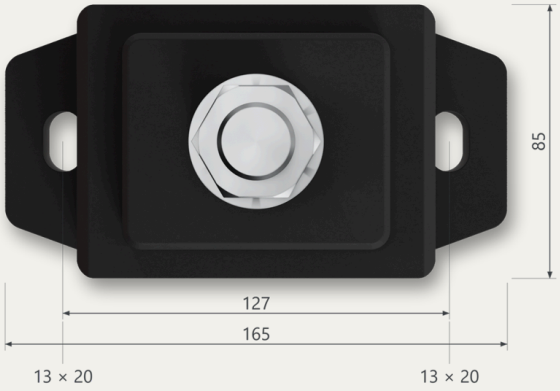

DIMENSIONS

Stud thread	**M20**	Base (L × W)	**165 × 85 mm**	Hole centers	**127 mm**
Body height	**72 mm**	Min. height	**120 mm**	Total height	**170 mm**

Not sure it fits? To help us confirm compatibility, please send us a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon

600

Engine and gearbox, held in line.

A marine engine mount designed to reduce vibration and support stable engine and gearbox alignment.

M24	166 × 93 mm	127 mm	95 mm
Stud thread	Base (L × W)	Hole centers	Body height

FITS THESE ENGINES

Cummins	QSM11 · QSB 5.9 · 6CTA 8.3 · QSL9 · QSC 8.3

REPLACES PART NUMBERS · BY ENGINE APPLICATION

Cummins QSM11	Cummins QSB 5.9	Cummins 6CTA 8.3 / QSL9 / QSC 8.3
3964883	**4931364 5301975**	**3968021 3393853**

KEY FEATURES

- Marine-grade aluminum body with corrosion-resistant construction
- Helps support stable engine and gearbox alignment
- Bonded rubber element designed to reduce engine vibration and noise
- Suitable for leisure and commercial marine applications

NOVIBRASYON 600

Dimensions & technical data

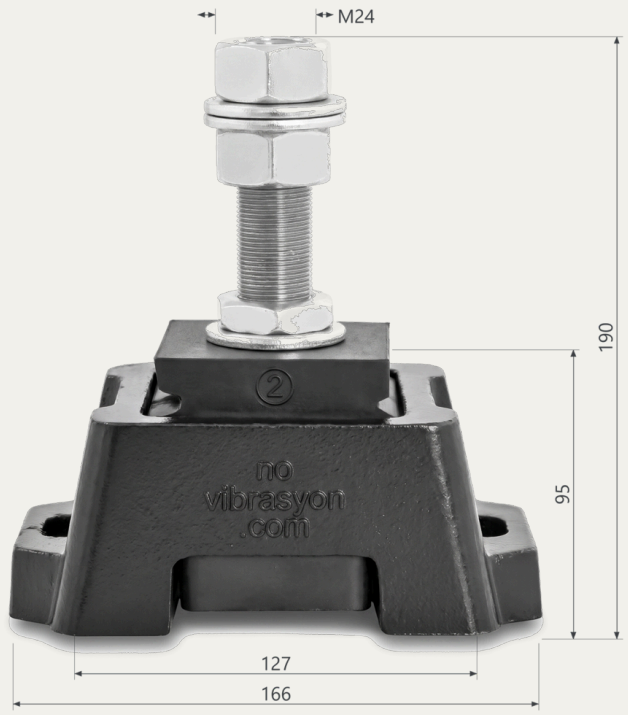

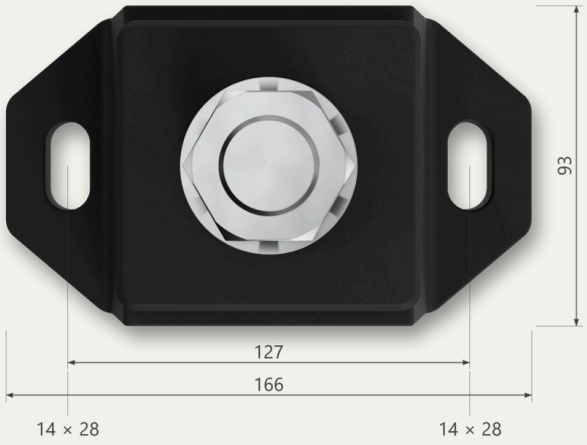

DIMENSIONS

Stud thread	**M24**	Base (L × W)	**166 × 93 mm**	Hole centers	**127 mm**
Body height	**95 mm**	Total height	**190 mm**		

Not sure it fits? Mount specifications can vary between engine and gearbox configurations. Please confirm the existing mount part number, stud size and load requirements before ordering. Send us a photo of your current mount if you need help checking compatibility.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

★ 5,0 CUSTOMER REVIEWS · EBAY

5,0

★★★★★

100% Positive Ratings

EBAY · NOVIBRASYON MARIN

★★★★★

"Fantastic product, excellent customer service, highly recommended! Fast delivery, Excellent condition."

United Kingdom eBay User

★★★★★

"Excellent experience. The shipping was faster than most of the vendors in the USA. Will buy again! A++"

USA eBay User

★★★★★

"Unbelievable fast delivery, the items even beter quality then original one.Thank you"

USA eBay User

04

Universal Mounts

Flexible mounts chosen by load and rubber hardness, for Volvo Penta, Perkins, Mercruiser, Beta, MAN, Cummins, Caterpillar and similar engines.

Novibrasyon VV1	Flexible support for smaller engines.	**p. 42**
Novibrasyon VV2	Flexible support for mid-size engines.	**p. 44**
Novibrasyon VV3	Flexible support for large marine diesels.	**p. 46**
Novibrasyon MT Series	Three sizes. Three hardness options.	**p. 48**

Novibrasyon Universal

VV1

Flexible support for smaller engines.

A flexible marine engine mount designed to reduce vibration and support stable engine alignment. Available in three rubber hardness options, with a choice of galvanized steel or 316 stainless steel body.

● Galvanized steel

○ 316 stainless steel

45–100 kg	M16 × 1.5	120 × 60.5 mm	100 mm
Max. load per mount	Stud thread	Base (L × W)	Hole centers

RUBBER HARDNESS & MAXIMUM LOAD

45 Shore	55 Shore	65 Shore
45 kg	55 kg	100 kg
per mount	per mount	per mount

TYPICAL APPLICATIONS

Volvo Penta · Perkins · Mercruiser · Beta Marine · and similar engines

Selected installations, subject to checking the mounting dimensions and engine load.

KEY FEATURES

- Bonded rubber element designed to reduce vibration and noise
- Helps support stable engine alignment

UNIVERSAL 01

NOVIBRASYON VV1

Dimensions & technical data

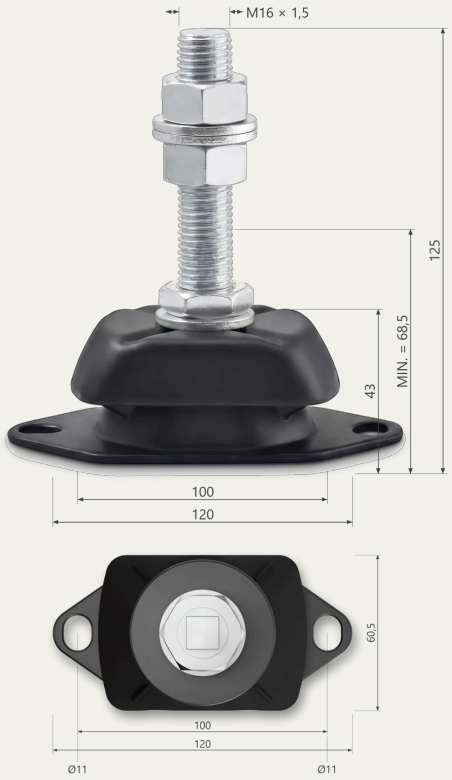

Natural frequency curve

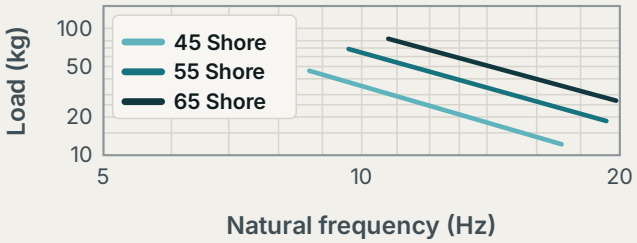

Load-deflection curve

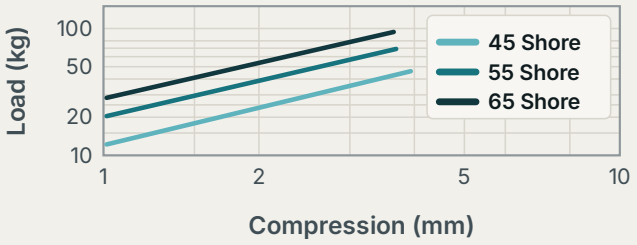

DIMENSIONS

Stud thread	**M16 × 1.5**	Base (L × W)	**120 × 60.5 mm**	Hole centers	**100 mm**
Holes	**Ø11 mm**	Body height	**43 mm**	Min. height	**68.5 mm**
Total height	**125 mm**				

AVAILABLE BODY OPTIONS ● Galvanized steel ○ 316 stainless steel

Not sure it fits? To help us select the correct variant, please send us your engine model and a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon Universal

VV2

Flexible support for mid-size engines.

A flexible marine engine mount designed to reduce vibration and support stable engine alignment. Available in three rubber hardness options, with a choice of galvanized steel or 316 stainless steel body.

● Galvanized steel

○ 316 stainless steel

120–300 kg	M16 × 1.5	184 × 82 mm	140 mm
Max. load per mount	Stud thread	Base (L × W)	Hole centers

RUBBER HARDNESS & MAXIMUM LOAD

45 Shore	55 Shore	65 Shore
120 kg	200 kg	300 kg
per mount	per mount	per mount

FITS THESE ENGINES

Volvo Penta	D2-40 · D2-55 · D2-75 · D3-110 · D3-130 · D3-160 · D3-190 · TAMD30 · TAMD31 · TAMD41 · KAD32 · KAMD42 · KAMD43 · KAMD44 · KAD300
Other engines	Yanmar · Caterpillar · MAN · Perkins · Cummins · and similar engines

Selected marine engines, subject to checking the mounting dimensions and load distribution.

KEY FEATURES

- Flexible rubber element designed to reduce vibration and noise
- Helps support stable engine alignment

NOVIBRASYON VV2

Dimensions & technical data

Natural frequency curve

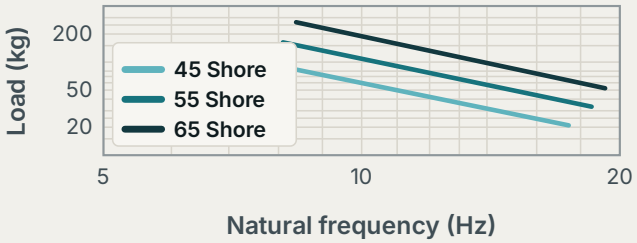

Load-deflection curve

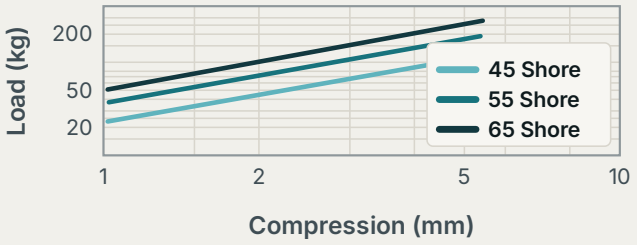

DIMENSIONS

Stud thread	**M16 × 1.5**	Base (L × W)	**184 × 82 mm**	Hole centers	**140 mm**
Holes	**Ø13 mm + 17 mm slot**	Body height	**55 mm**	Min. height	**78.5 mm**
Total height	**128 mm**				

AVAILABLE BODY OPTIONS ● Galvanized steel ○ 316 stainless steel

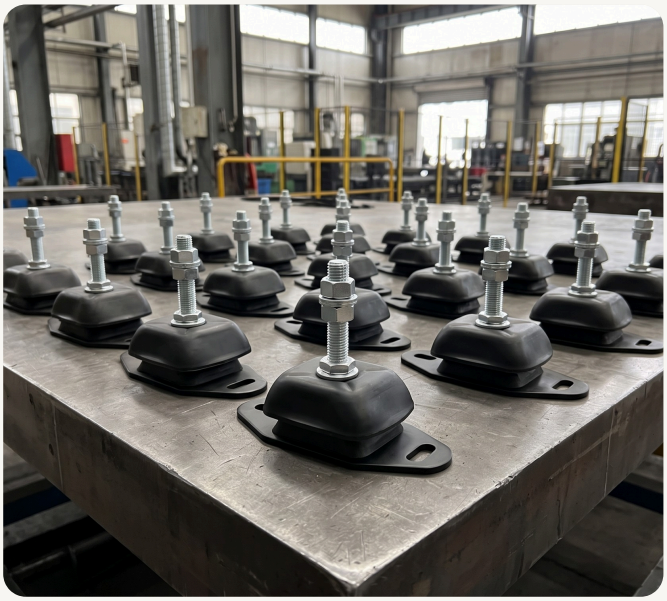

Not sure it fits? To help us select the correct variant, please send us your engine model and a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon Universal

VV3

Flexible support for large marine diesels.

A large flexible marine engine mount designed to reduce vibration and support stable engine alignment. Available in two rubber hardness and load capacity options.

500 / 800 kg	M20 × 1.5	228 × 112 mm	182 mm
Max. load per mount	Stud thread	Base (L × W)	Hole centers

AVAILABLE VARIANTS

VARIANT	MAX. LOAD	TYPICAL ENGINE APPLICATIONS
55 Shore	500 kg per mount	Volvo Penta D4 and D6 series; Yanmar 4LH and 6LP series; Cummins 4BT, 6BT, 6BTA 5.9 and QSB 5.9; Perkins/Sabre M92, M115 and M130; Caterpillar 3056 and C4.4; selected MAN applications
65 Shore	800 kg per mount	Volvo Penta TAMD 63/71/72/73/74/75 and D9 series; MAN D0836, D0826, D2848 (V8), D2840 (V10) and D2842 (V12); Cummins 6CTA 8.3, QSC 8.3, QSL9 and QSM11; Caterpillar 3116, 3126, C7 and C9

FITS THESE ENGINES

Volvo Penta	D4 · D6 · TAMD63L-A · 63P-A · TAMD71B · TAMD73P-A · 73WJ-A · TAMD74A-A · A-B · C-A · TAMD74L-A · L-B · P-A · P-B · TAMD75P-A
MAN	D2866 LE201 · D2866 LE202 · D2866 LE203 · D2866 LE4 Series · D2876 LE301 · D2876 LE401 · D2876 LE402 · D2876 LE403 · D2876 LE404 · D2876 LE405 · D2848 LE4 Series · D2840 LE4 Series · D2842 LE4 Series

MAN and Trelleborg / Metalastik reference numbers are listed in the part number finder.

KEY FEATURES

- Bonded rubber element designed to reduce vibration and noise
- Helps support stable engine alignment
- Load options for different engine and gearbox installations

NOVIBRASYON VV3

Dimensions & technical data

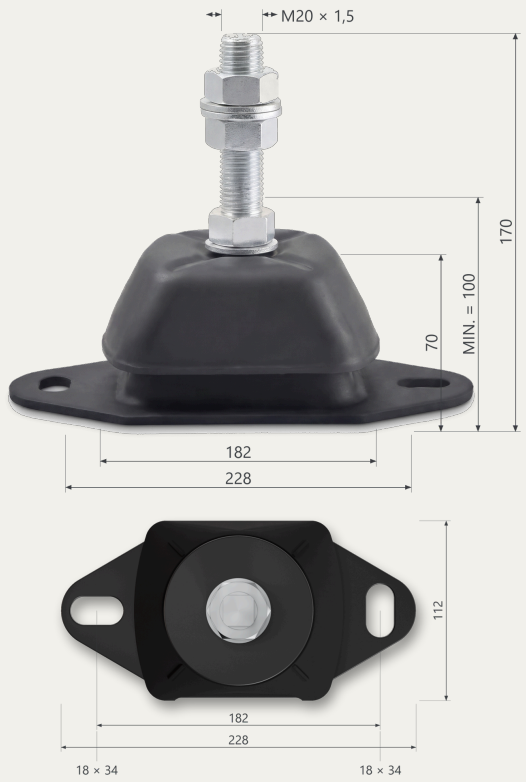

Natural frequency curve

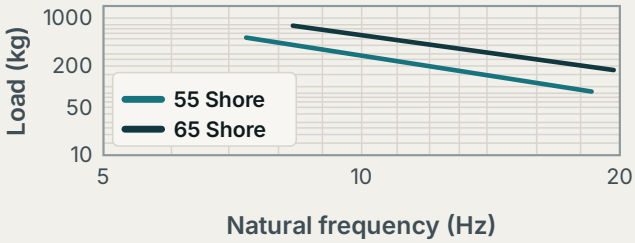

Load-deflection curve

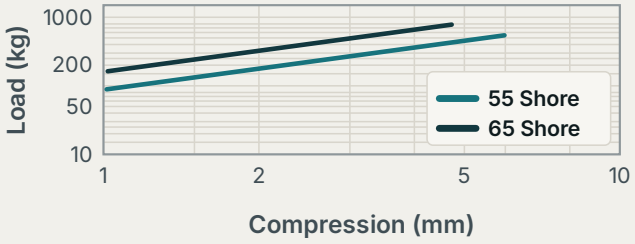

DIMENSIONS

Stud thread	**M20 × 1.5**	Base (L × W)	**228 × 112 mm**	Hole centers	**182 mm**
Holes	**18 × 34 mm slots**	Body height	**70 mm**	Min. height	**100 mm**
Total height	**170 mm**				

Not sure it fits?

The engine models and part numbers listed are potential replacement references; exact compatibility has not been verified for every model. To select the correct variant, please send us your engine model, engine and gearbox weight, and a photo or the dimensions of your current mount before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

Novibrasyon Universal

MT

Three sizes. Three hardness options.

The Novibrasyon MT series offers three mount sizes for a wide range of marine engines. Each model is available in 45, 55 and 65 Shore rubber hardness options, allowing the mount to be selected according to the load at each mounting point.

MT1

MT2

MT3

80–550 kg	MT1 · MT2 · MT3	45 · 55 · 65
Max. load per mount	Three sizes	Shore hardness options

MAXIMUM STATIC LOAD PER MOUNT

MODEL	45 SHORE	55 SHORE	65 SHORE	APPLICATION GUIDE
MT1	80 kg	140 kg	200 kg	approx. 9–130 hp
MT2	140 kg	220 kg	350 kg	approx. 100–240 hp
MT3	200 kg	400 kg	550 kg	approx. 200–650 hp

Loads shown are maximum static loads per mount. Horsepower ranges are guides; engine weight and load distribution determine the correct model.

KEY FEATURES

- Three sizes covering a broad range of marine engine installations
- Choice of rubber hardness to suit different mounting loads
- Bonded rubber element designed to reduce vibration and noise

NOVIBRASYON MT SERIES

Dimensions & technical data

Natural frequency curve

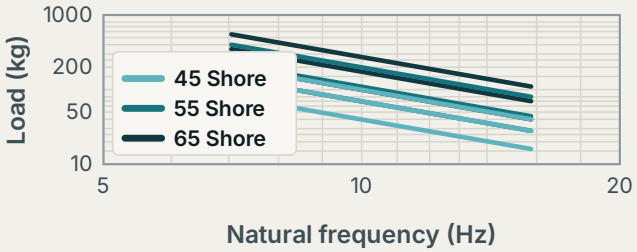

Load-deflection curve

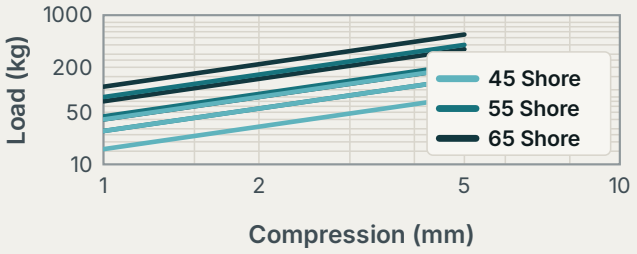

DIMENSIONS

	MT1	MT2	MT3
Stud thread	**M16 × 1.5**	**M16 × 1.5 or M18 × 1.5**	**M24 × 1.5**
Base (L × W)	**140 × 68 mm**	**166 × 98 mm**	**184 × 105 mm**
Hole centers	**100 mm**	**133 mm**	**140 mm**
Slots	**12.5 × 28 mm**	**13 × 28 mm**	**16 × 33 mm**
Height	**70 mm**	**75 mm**	**90 mm**

MT curves are calculated (5 mm deflection assumed at maximum load) and will be confirmed by measurement.

Not sure it fits? To help us select the correct MT model and Shore hardness, please send your engine model, engine and gearbox weight, and a photo or measurements of your current mounts before ordering.

WhatsApp +90 530 780 19 95 **info@novibrasyonmarin.com**

FedEx or UPS Express · 2–4 business days · insured and tracked

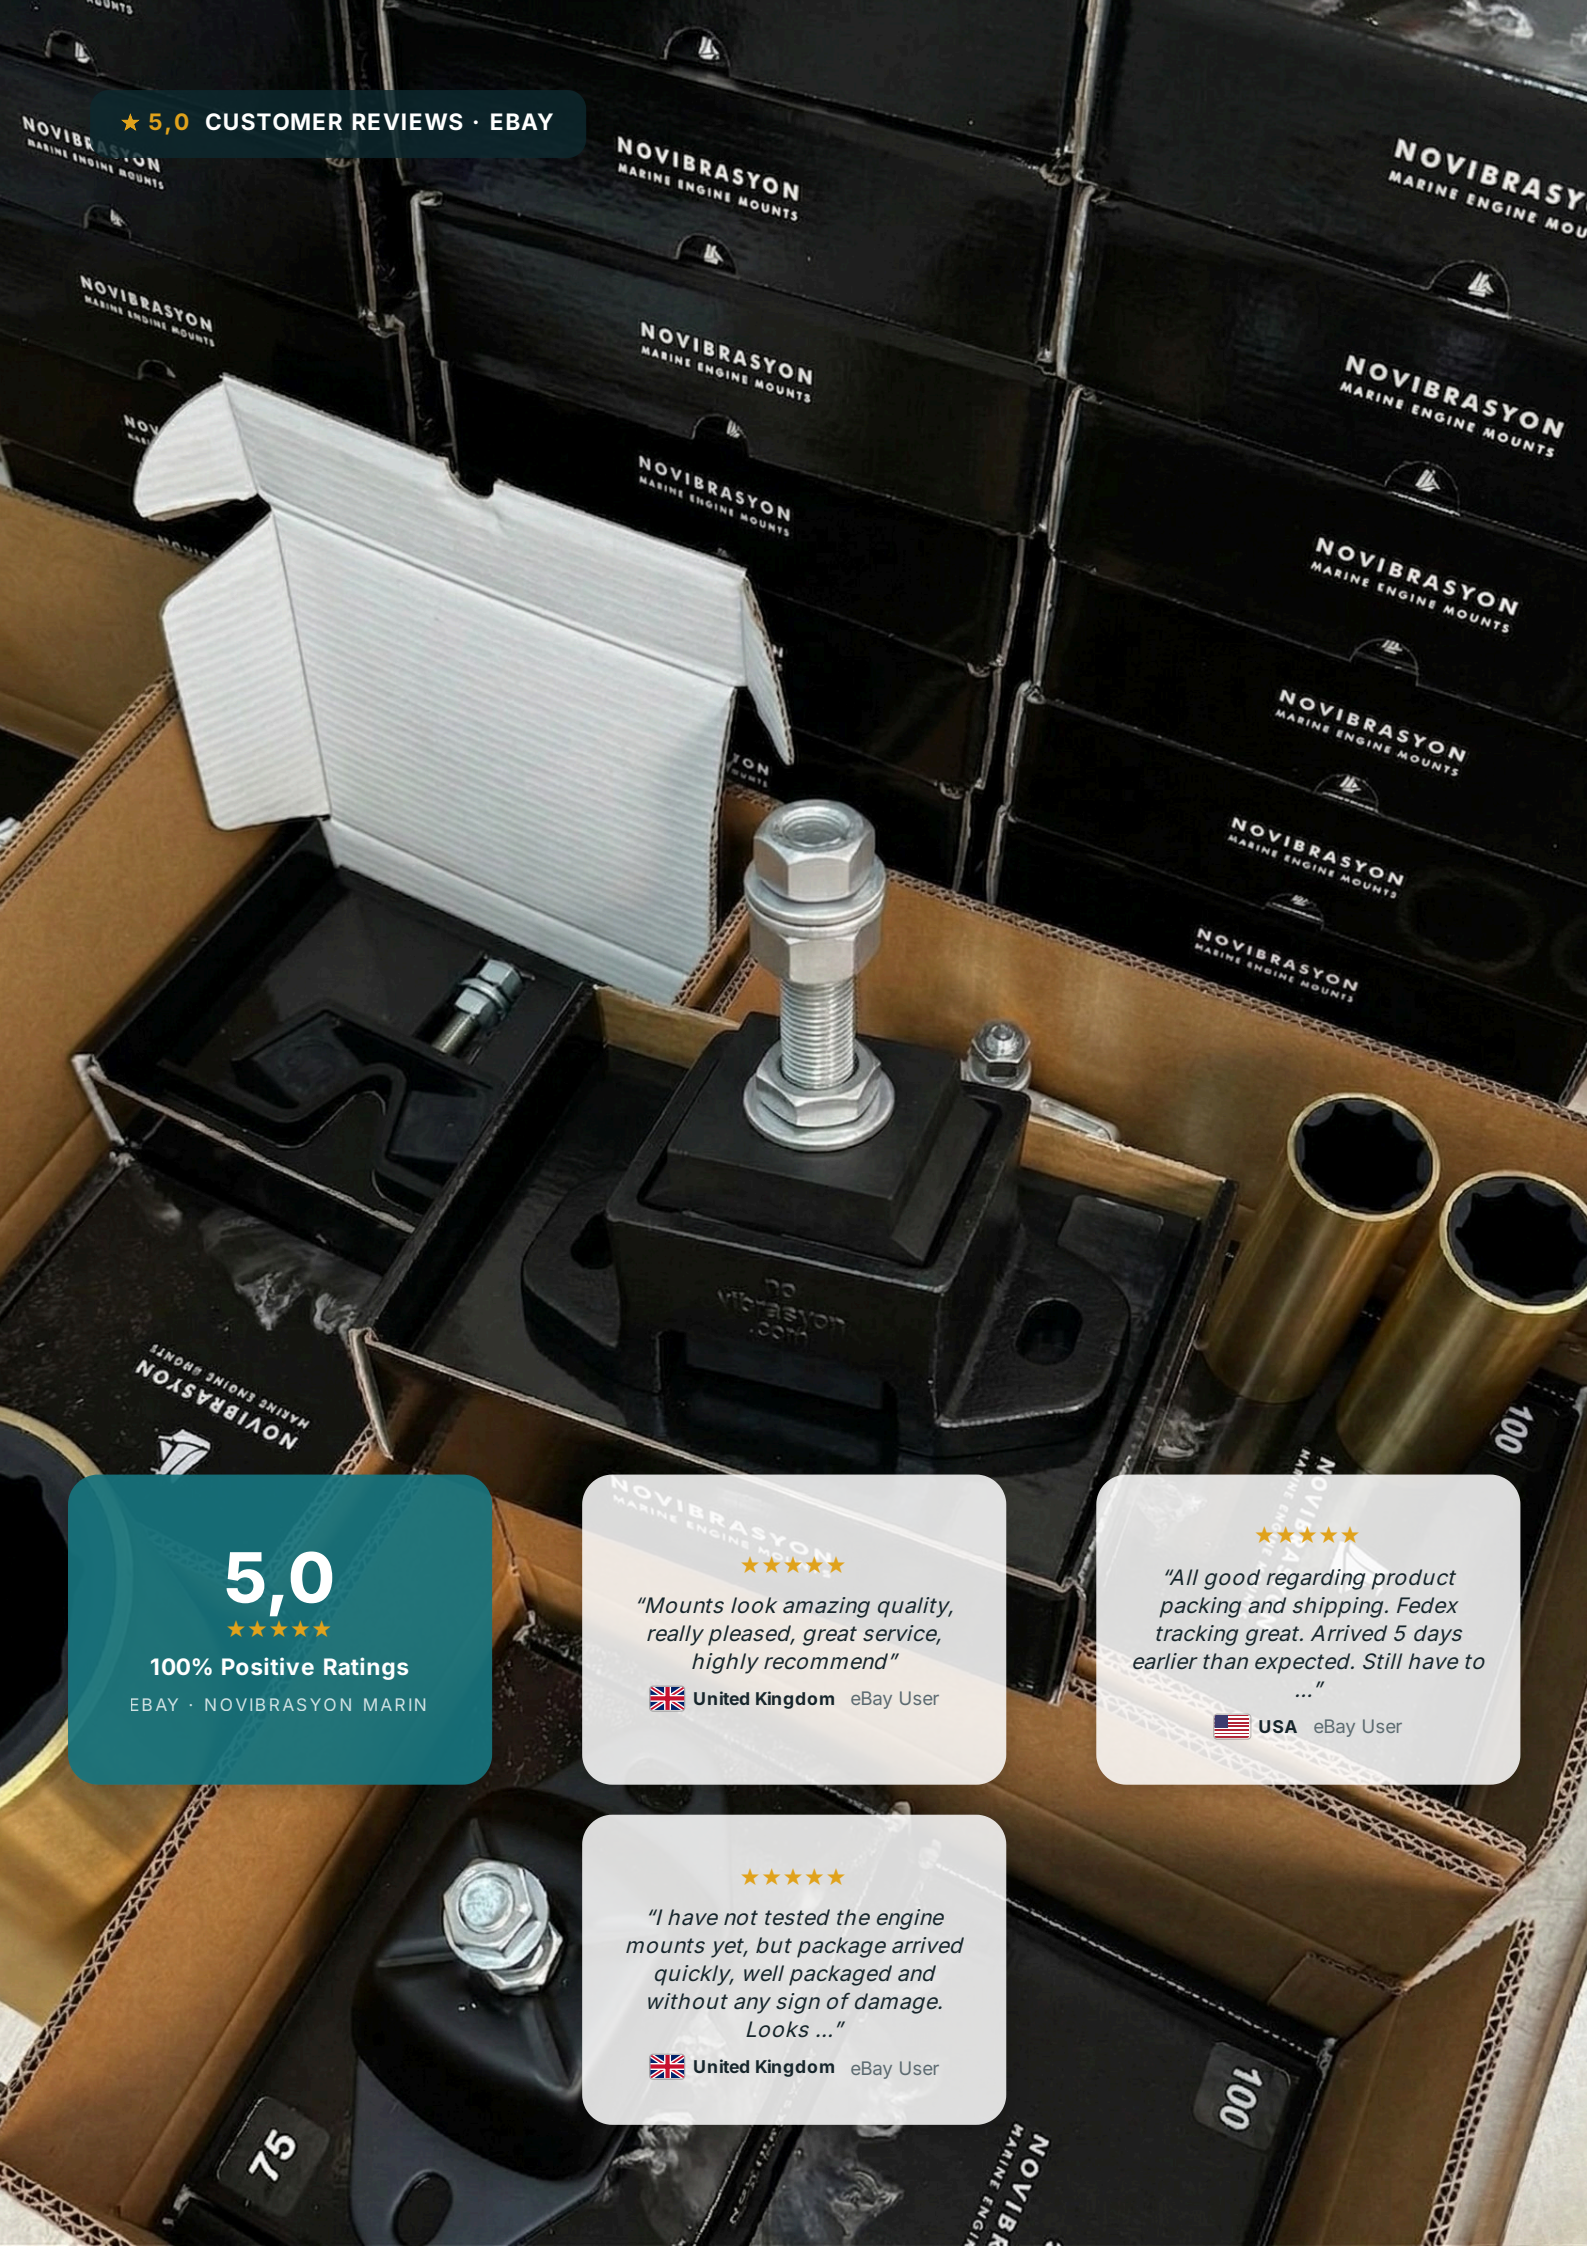
★ 5,0 CUSTOMER REVIEWS · EBAY
NOVIBRASYON
MARINE ENGINE MOUNTS
5,0
★★★★★
100% Positive Ratings
EBAY · NOVIBRASYON MARIN
★★★★★
"Mounts look amazing quality, really pleased, great service, highly recommend"
United Kingdom eBay User
★★★★★
"All good regarding product packing and shipping. Fedex tracking great. Arrived 5 days earlier than expected. Still have to ..."
USA eBay User
★★★★★
"I have not tested the engine mounts yet, but package arrived quickly, well packaged and without any sign of damage. Looks ..."
United Kingdom eBay User
75
100

ALSO FROM NOVIBRASYON

Shaft bearings.

Bronze and fiber shaft bearings for smooth, efficient shaft rotation, available in metric and inch sizes.

A Shaft / internal diameter **B** Outer diameter **C** Length

BRONZE · MM 47

A	B	C
20 mm	35 mm	80 mm
22 mm	31.8 mm	88 mm
25 mm	31.8 mm	100 mm
25 mm	40 mm	100 mm
25 mm	43 mm	100 mm
28 mm	42 mm	112 mm
30 mm	40 mm	120 mm
30 mm	45 mm	120 mm
32 mm	45 mm	128 mm
35 mm	50 mm	140 mm
35 mm	55 mm	140 mm
38 mm	50.8 mm	152 mm
38 mm	55 mm	152 mm
40 mm	60.3 mm	160 mm
40 mm	56 mm	160 mm
42 mm	60 mm	168 mm
45 mm	61 mm	180 mm
45 mm	65 mm	180 mm
45 mm	70 mm	180 mm
50 mm	66.7 mm	180 mm
50 mm	70 mm	200 mm
55 mm	75 mm	220 mm
55 mm	80 mm	220 mm
60 mm	76.2 mm	240 mm
60 mm	82.6 mm	240 mm
60 mm	80 mm	240 mm
65 mm	85 mm	260 mm
65 mm	88 mm	260 mm
70 mm	95.3 mm	279.4 mm
70 mm	90 mm	280 mm
72 mm	88.9 mm	288 mm
75 mm	101.6 mm	304.8 mm
75 mm	96 mm	300 mm
80 mm	102 mm	320 mm
85 mm	115 mm	340 mm
90 mm	115 mm	360 mm
90 mm	120 mm	360 mm
95 mm	115 mm	380 mm
100 mm	133.4 mm	400 mm
100 mm	125 mm	400 mm
100 mm	130 mm	400 mm
105 mm	133.4 mm	420 mm
108 mm	139.7 mm	432 mm
110 mm	139.7 mm	440 mm
110 mm	150 mm	440 mm
115 mm	145 mm	460 mm
120 mm	155.6 mm	480 mm

BRONZE · INCH 52

A	B	C
1 in	1-1/2 in	4 in
1 in	1-5/8 in	4 in
1-1/8 in	1-1/2 in	4-1/2 in
1-1/8 in	1-3/4 in	4-1/2 in
1-1/4 in	1-3/4 in	5 in
1-1/4 in	2 in	5 in
1-3/8 in	2-1/8 in	5-1/2 in
1-3/8 in	2-3/8 in	5-1/2 in
1-1/2 in	2-3/8 in	6 in
1-1/2 in	55 †	6 in
1-5/8 in	2-1/8 in	6-1/2 in
1-5/8 in	2-5/8 in	6-1/2 in
1-3/4 in	2-1/2 in	7-1/2 in
1-3/4 in	2-5/8 in	7-1/2 in
1-7/8 in	2-5/8 in	7-1/2 in
1-7/8 in	2-15/16 in	8 in
2 in	2-5/8 in	8 in
2 in	2-3/4 in	8 in
2 in	3 in	8 in
2-1/8 in	3 in	8-1/2 in
2-1/8 in	3-1/8 in	8-1/2 in
2-1/4 in	3 in	9 in
2-1/4 in	3-1/8 in	9 in
2-1/4 in	3-3/8 in	9 in
2-3/8 in	3-1/8 in	9-1/2 in
2-3/8 in	3-1/4 in	9-1/2 in
2-3/8 in	3-3/8 in	9-1/2 in
2-1/2 in	3-1/4 in	10 in
2-1/2 in	3-3/8 in	10 in
2-1/2 in	3-1/2 in	10 in
2-5/8 in	3-3/8 in	10-1/2 in
2-5/8 in	3-1/2 in	10-1/2 in
2-3/4 in	3-3/8 in	11 in
2-3/4 in	3-1/2 in	11 in
2-3/4 in	3-3/4 in	11 in
2-7/8 in	3-1/2 in	11-1/2 in
2-7/8 in	3-3/4 in	11-1/2 in
3 in	3-3/4 in	12 in
3 in	4 in	12 in
3 in	105 †	12 in
3-1/8 in	4-1/4 in	12-1/2 in
3-1/4 in	4-1/4 in	13 in
3-1/4 in	4-1/2 in	13 in
3-3/8 in	4-1/2 in	13-1/2 in
3-1/2 in	4-1/4 in	14 in
3-1/2 in	4-1/2 in	14 in
3-5/8 in	4-1/4 in	14-1/2 in
3-3/4 in	4-3/4 in	15 in
3-3/4 in	5 in	15 in
3-3/4 in	5-1/4 in	15 in
4 in	5 in	16 in
4 in	5-1/4 in	16 in

FIBER · MM 16

A	B	C
25 mm	40 mm	100 mm
30 mm	45 mm	120 mm
35 mm	50 mm	140 mm
35 mm	55 mm	140 mm
40 mm	60 mm	160 mm
45 mm	65 mm	180 mm
50 mm	70 mm	200 mm
50 mm	75 mm	200 mm
55 mm	75 mm	220 mm
60 mm	80 mm	240 mm
65 mm	85 mm	260 mm
70 mm	90 mm	280 mm
75 mm	95 mm	300 mm
80 mm	100 mm	320 mm
90 mm	115 mm	360 mm
100 mm	125 mm	400 mm

Bronze shaft bearings

Fiber shaft bearings

† Unit not stated in the source listing. Please confirm before ordering.

SIZE NOT LISTED? · WHATSAPP
+90 530 780 19 95
info@novibrasyonmarin.com
www.novibrasyon.com

NOVIBRASYON
MARINE ENGINE MOUNTS

Feel the quality. Enjoy the silence.

ORDERING IN 3 STEPS

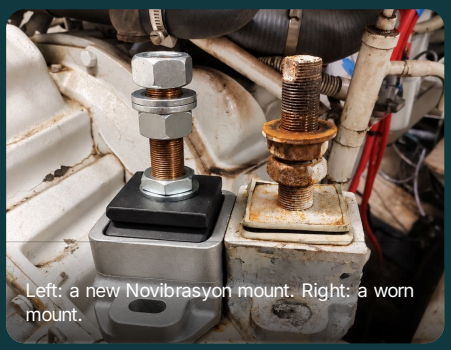

Left: a new Novibrasyon mount. Right: a worn mount.

1

Tell us your engine

Engine make and model, and the position you need: front, rear, left, right or saildrive.

2

Not sure? Send a photo

If you don't know the model, a photo of your old mount is enough. We find the right part for you.

3

We confirm and ship

FedEx Express or UPS Express. Insured and tracked, in 2–4 business days depending on destination and customs.

EASY WAYS TO ORDER

Order on eBay, by WhatsApp or on our website. You can also ask us anything by e-mail.

Ask on WhatsApp

Scan and send us a photo of your mount. We reply with the right part.

E-mail

Scan to e-mail us a question or an order.

Website

Scan to see every product online and order.

eBay store

Scan to see our eBay store and reviews.

Evliya Çelebi Mah. Mavi Sokak No: 25
Tuzla / İstanbul, Türkiye

WhatsApp +90 530 780 19 95 · info@novibrasyonmarin.com · www.novibrasyon.com

Thank you for choosing Novibrasyon Marin.

Engine brand names are used only to show compatibility. Specifications and images may change without notice. Please confirm fitment before ordering.