1. Description

1.1. Project

Project Name	project13
Board Name	NUCLEO-L073RZ
Generated with:	STM32CubeMX 5.4.0
Date	01/03/2020

1.2. MCU

MCU Series	STM32L0
MCU Line	STM32L0x3
MCU name	STM32L073RZTx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

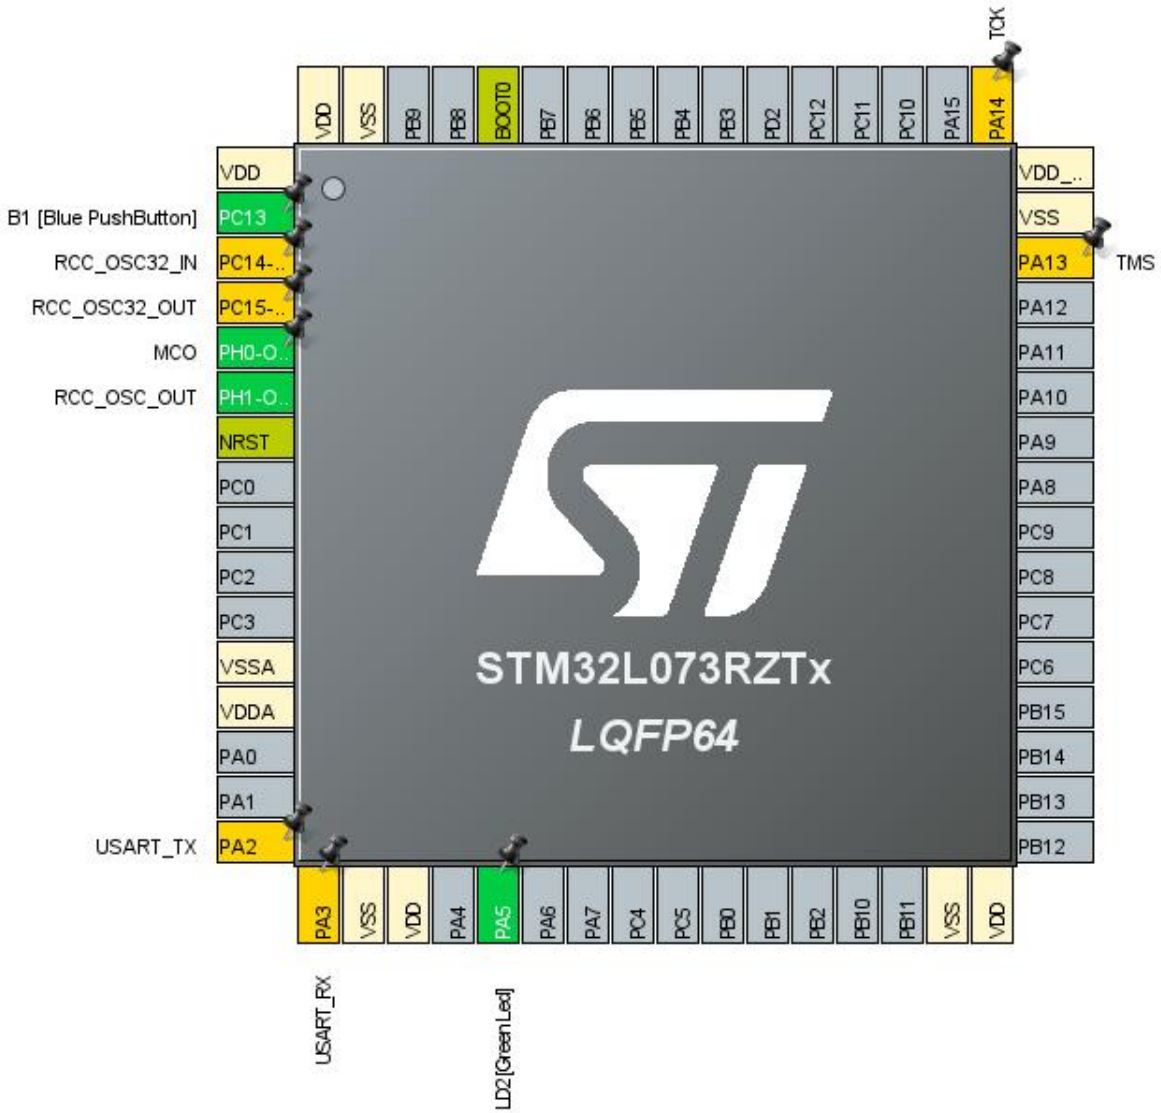

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VDD	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	MCO
6	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2 *	I/O	USART2_TX	USART_TX
17	PA3 *	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
31	VSS	Power		
32	VDD	Power		
46	PA13 *	I/O	SYS_SWDIO	TMS
47	VSS	Power		
48	VDD_USB	Power		
49	PA14 *	I/O	SYS_SWCLK	TCK
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

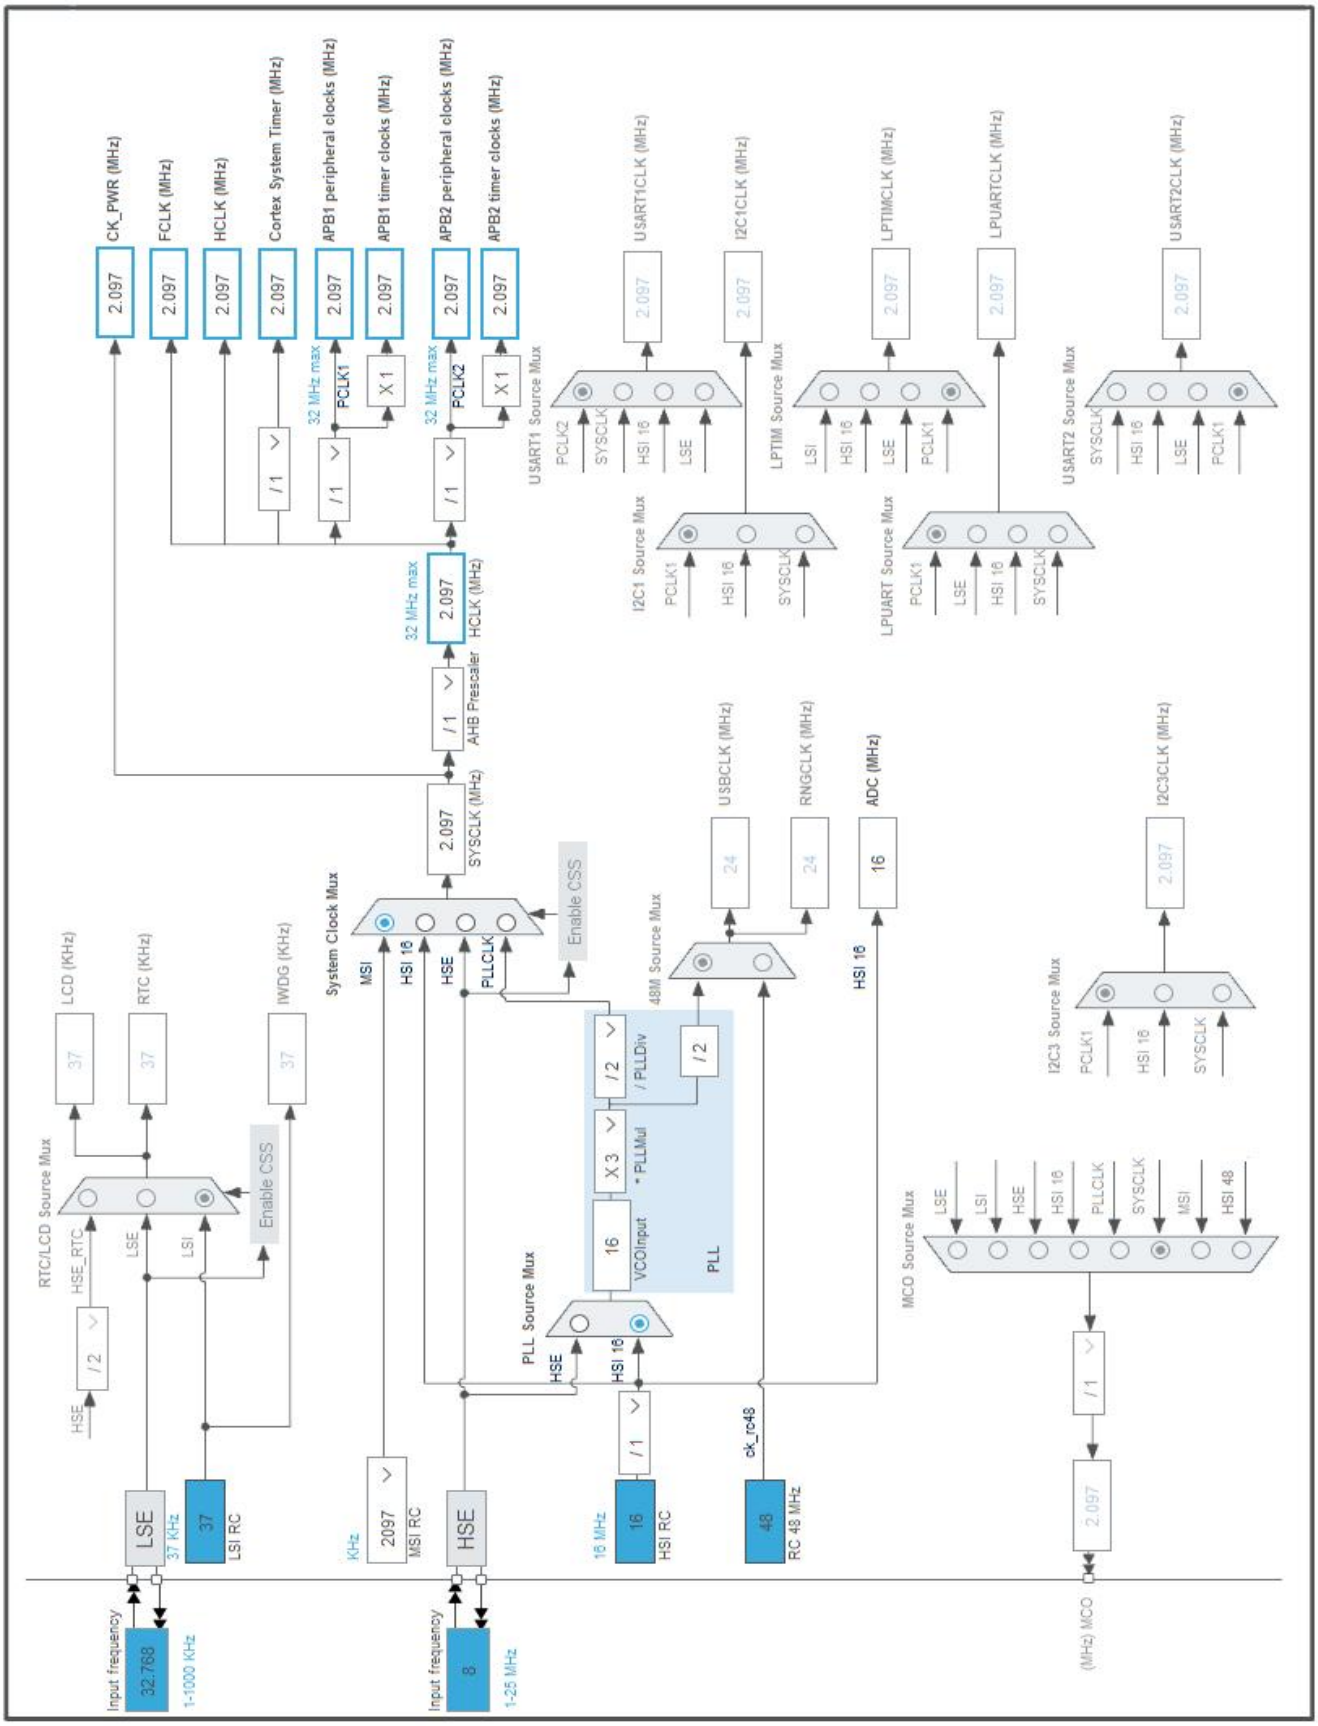

5. Software Project

5.1. Project Settings

Name	Value
Project Name	project13
Project Folder	F:\CubeIDE_workspace\project13
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L0 V1.11.2

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32L0
Line	STM32L0x3
MCU	STM32L073RZTx
Datasheet	027096_Rev3

6.2. Parameter Selection

Temperature	25
Vdd	3.0

7. IPs and Middleware Configuration

7.1. ADC

mode: Temperature Sensor Channel

7.1.1. Parameter Settings:

ADC_Settings:

Clock Prescaler	**Asynchronous clock mode divided by 4 ***
Resolution	ADC 12-bit resolution
Data Alignment	Right alignment
Scan Direction	Forward
Continuous Conversion Mode	Disabled
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	Disabled
End Of Conversion Selection	End of single conversion
Overrun behaviour	Overrun data preserved
Low Power Auto Wait	Disabled
Low Frequency Mode	Disabled
Auto Off	Disabled
Oversampling Mode	Disabled

ADC_Regular_ConversionMode:

Sampling Time	1.5 Cycles
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None

WatchDog:

Enable Analog WatchDog Mode	false

7.2. GPIO

7.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

7.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Buffer Cache	Enabled
Prefetch	Disabled
Preread	Enabled

Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.4. SYS

Timebase Source: SysTick

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	MCO
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	USART_RX
	PA13	SYS_SWDIO	n/a	n/a	**n/a**	TMS
	PA14	SYS_SWCLK	n/a	n/a	**n/a**	TCK
GPIO	PC13	GPIO_EXTI13	**External Interrupt Mode with Falling edge trigger detection**	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable Interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash and EEPROM global interrupt	unused		
RCC and CRS global interrupt	unused		
EXTI line 4 to 15 interrupts	unused		
ADC, COMP1 and COMP2 interrupts (COMP interrupts through EXTI lines 21 and 22)	unused		

*** User modified value**

9. Software Pack Report