1. Description

1.1. Project

Project Name	Function Generator Project
Board Name	NUCLEO-L053R8
Generated with:	STM32CubeMX 5.3.0
Date	01/11/2020

1.2. MCU

MCU Series	STM32L0
MCU Line	STM32L0x3
MCU name	STM32L053R8Tx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

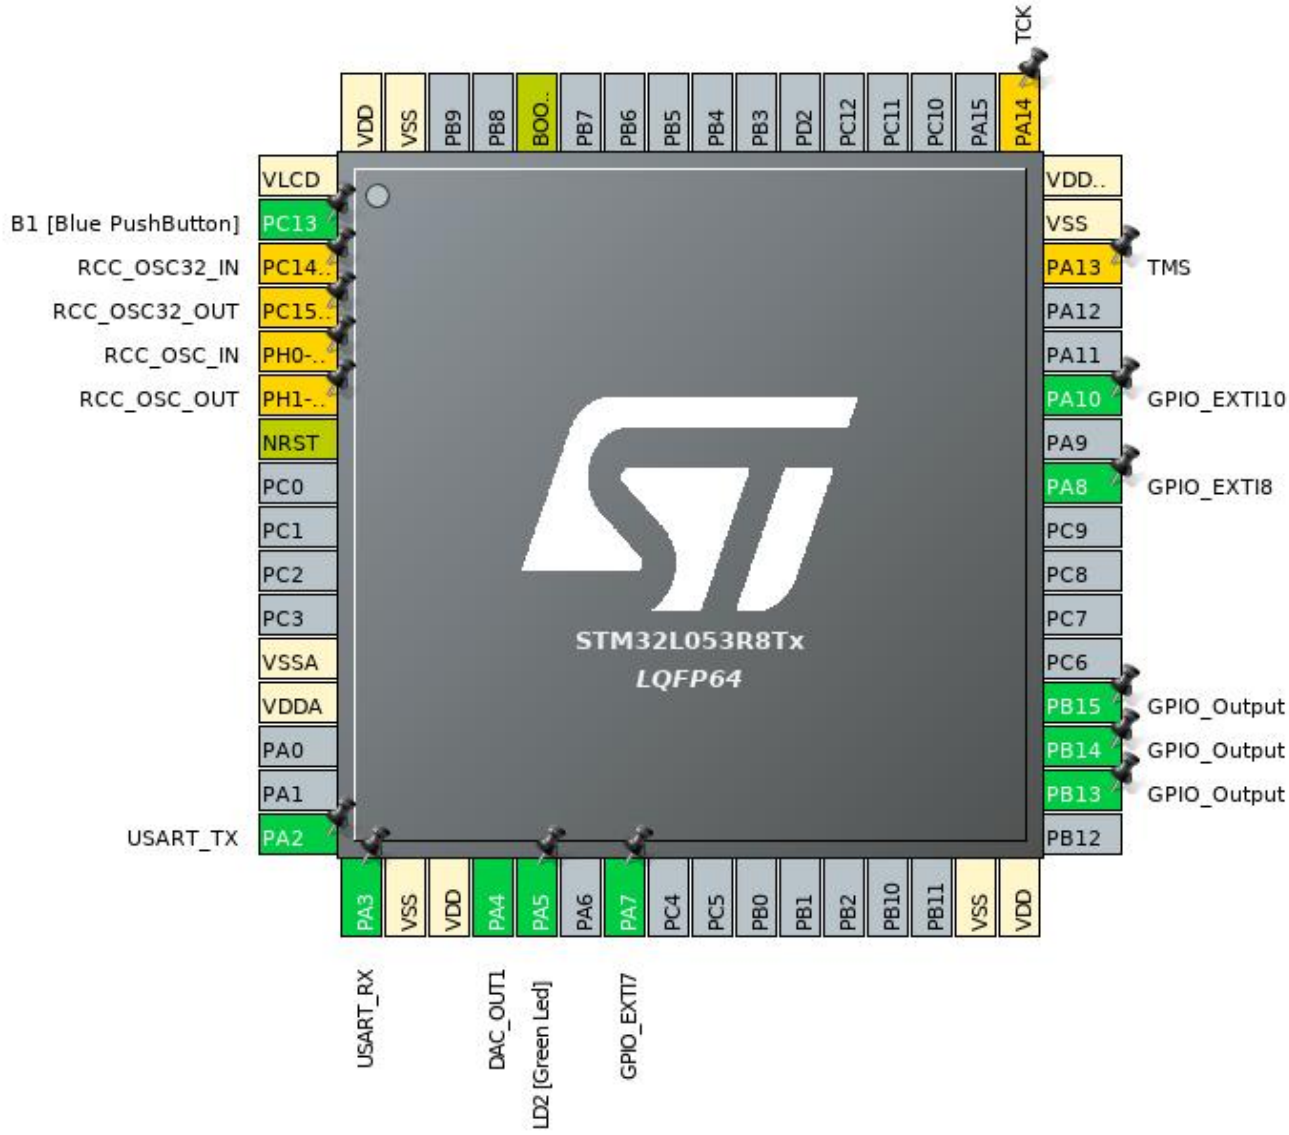

3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VLCD	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN *	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT *	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN *	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT *	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
20	PA4	I/O	DAC_OUT1	
21	PA5 **	I/O	GPIO_Output	LD2 [Green Led]
23	PA7	I/O	GPIO_EXTI7	
31	VSS	Power		
32	VDD	Power		
34	PB13 **	I/O	GPIO_Output	
35	PB14 **	I/O	GPIO_Output	
36	PB15 **	I/O	GPIO_Output	
41	PA8	I/O	GPIO_EXTI8	
43	PA10	I/O	GPIO_EXTI10	
46	PA13 *	I/O	SYS_SWDIO	TMS
47	VSS	Power		
48	VDD_USB	Power		
49	PA14 *	I/O	SYS_SWCLK	TCK
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

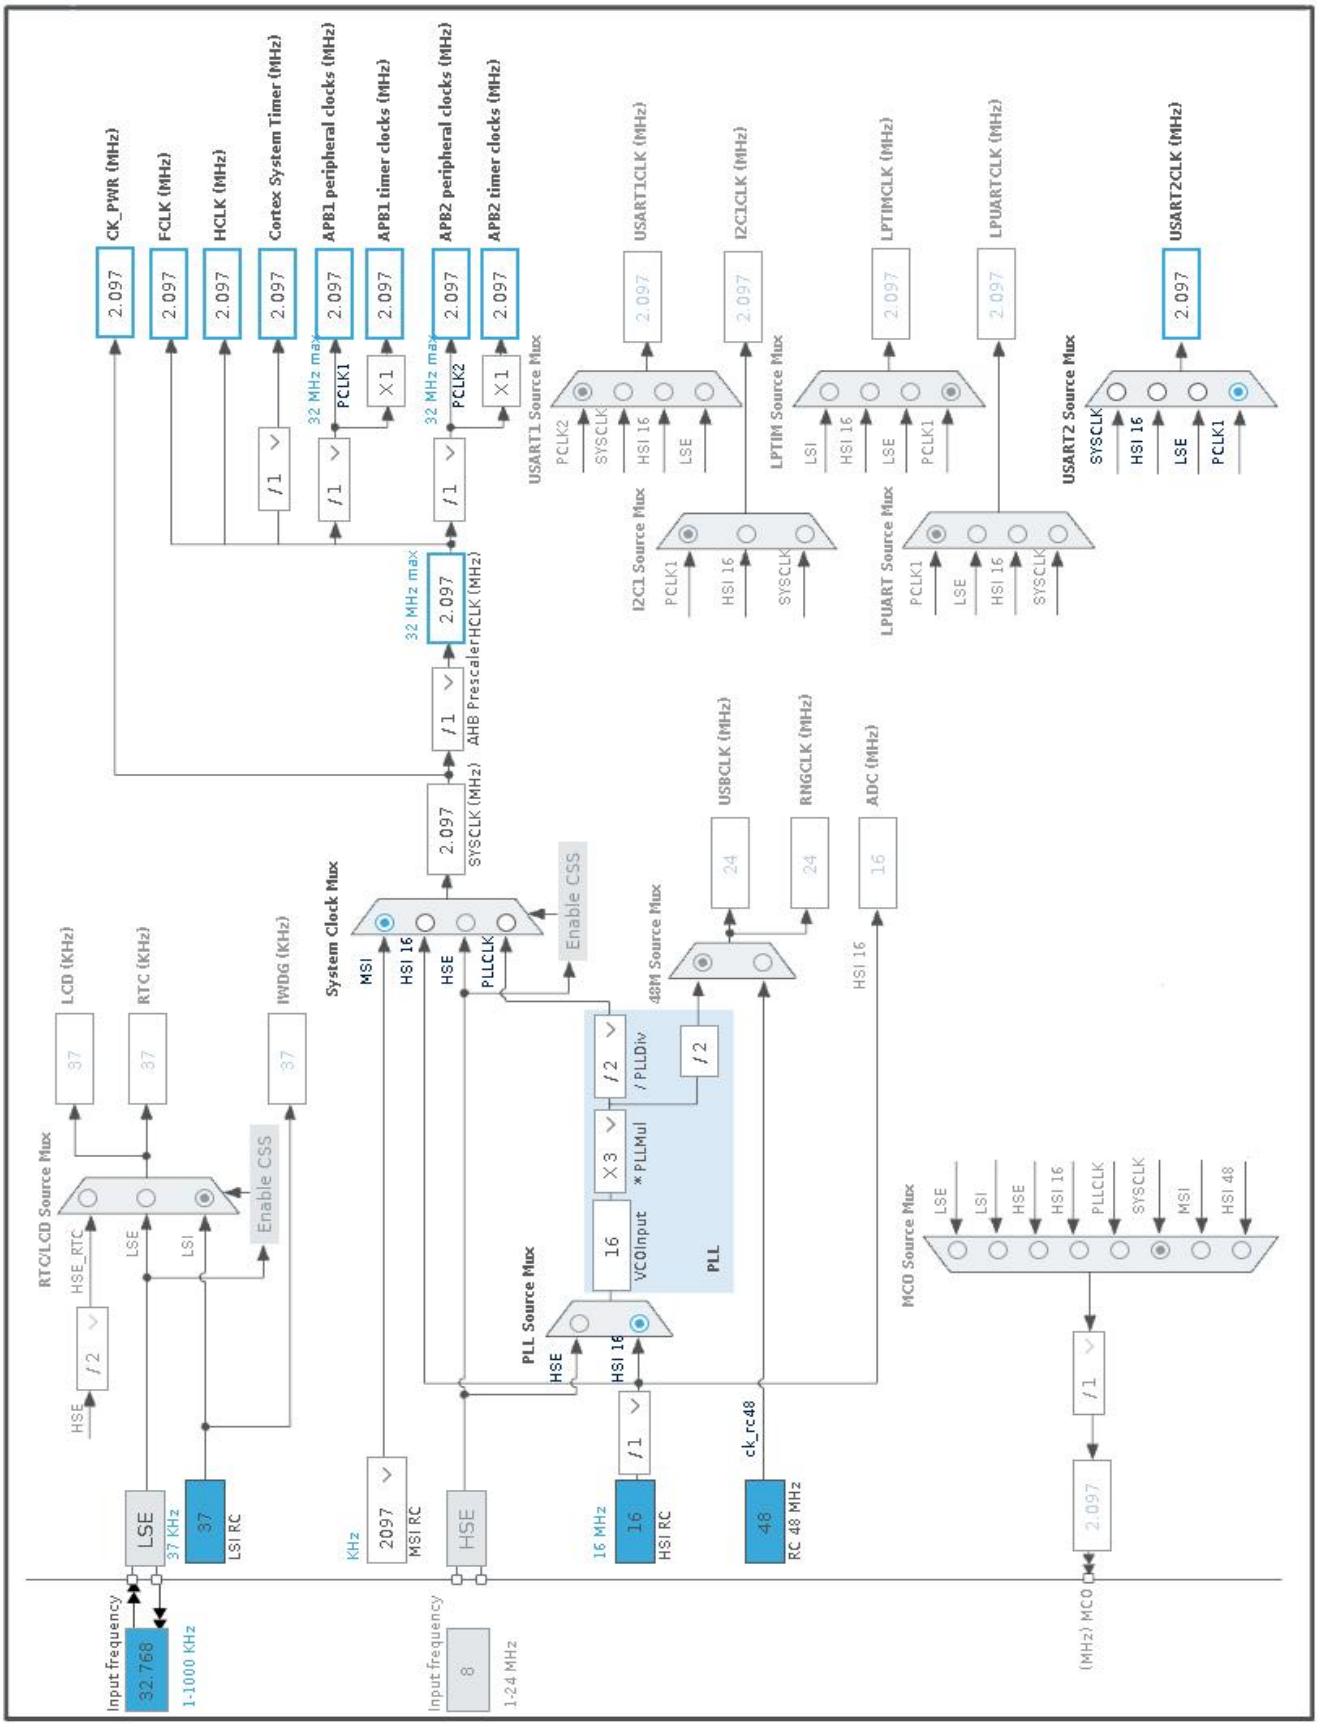

5. Software Project

5.1. Project Settings

Name	Value
Project Name	Function Generator Project
Project Folder	/home/null/STM32CubeIDE/workspace_1.0.2/Function Generator Project
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_L0 V1.11.2

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32L0
Line	STM32L0x3
MCU	STM32L053R8Tx
Datasheet	025844_Rev7

6.2. Parameter Selection

Temperature	25
Vdd	3.0

7. IPs and Middleware Configuration

7.1. DAC

mode: OUT1 Configuration

7.1.1. Parameter Settings:

DAC Out1 Settings:

Output Buffer	Enable
Trigger	None

7.2. RCC

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Buffer Cache	Enabled
Prefetch	Disabled
Preread	Enabled
Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
MSI Calibration Value	0
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

7.3. SYS

Timebase Source: SysTick

7.4. TIM2

Clock Source : Internal Clock

7.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	**2097 ***

Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	**1 ***
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

7.5. USART2

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
DAC	PA4	DAC_OUT1	Analog mode	No pull-up and no pull-down	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	**Very High ***	USART_RX
Single Mapped Signals	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
	PA13	SYS_SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_SWCLK	n/a	n/a	n/a	TCK
GPIO	PC13	GPIO_EXTI13	**External Interrupt Mode with Falling edge trigger detection**	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]
	PA7	GPIO_EXTI7	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PB13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PB15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA8	GPIO_EXTI8	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PA10	GPIO_EXTI10	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
System service call via SWI instruction	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
EXTI line 4 to 15 interrupts	true	0	0
TIM2 global interrupt	true	0	0
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	true	2	0
PVD interrupt through EXTI line 16	unused		
Flash and EEPROM global interrupt	unused		
RCC and CRS global interrupt	unused		
TIM6 global interrupt and DAC1/DAC2 underrun error interrupts	unused		

*** User modified value**

9. Software Pack Report