PART I

R.A.I. Approved

FOR TRAINING ONLY

SECTION 1
LIMITATION

TABLE OF CONTENTS

	Page
GENERAL	1–1
BASIS OF CERTIFICATION	1–1
TYPE OF OPERATION	1–1
VFR OPERATION	1–1
FLIGHT WITH DOORS REMOVED	1–1
IFR OPERATION	1–2
REQUIRED EQUIPMENT FOR IFR FLIGHT SINGLE PILOT	1–2
FLIGHT WITH ONE OF THE TWO HELIPILOTS INOPERATIVE	1–2
OPTIONAL EQUIPMENT	1–3
FLIGHT CREW	1–3
NUMBER OF SEATS	1–3
AIRSPEED LIMITATIONS (KIAS)	1–3
GROUND SPEED LIMITATIONS	1–6
WEIGHT LIMITATIONS	1–6
CENTER OF GRAVITY LIMITATIONS	1–6
BAGGAGE COMPARTMENT LIMITATIONS	1–9
ALTITUDE LIMITATIONS	1–9
AMBIENT AIR TEMPERATURE LIMITATIONS	1–9
POWER PLANT LIMITATIONS	1–9
GAS GENERATOR (N1) RPM	1–9
POWER TURBINE (N2) RPM	1–10
TURBINE OUTLET TEMPERATURE (TOT)	1–11
ROTOR LIMITATIONS	1–11
TRANSMISSION LIMITATIONS	1–12
TORQUE (TRQ%)	1–12
FUEL SYSTEM LIMITATIONS	1–13
ENGINE LUBRICATION SYSTEM LIMITATIONS	1–15
MAIN TRANSMISSION LUBRICATION SYSTEM LIMITATIONS	1–16A

FOR TRAINING ONLY

FOR TRAINING ONLY

Table of Contents (Contd.)

	Page
TAIL ROTOR GEARBOX LUBRICANT LIMITATIONS	1–16B
ENGINE STARTER LIMITATIONS	1–16B
GENERATOR LIMITATIONS	1–16B
MAIN HYDRAULIC SYSTEM LIMITATIONS	1–16D
FLUID PRESSURE	1–16D
UTILITY HYDRAULIC SYSTEM LIMITATIONS	1–17
NORMAL SYSTEM FLUID PRESSURE	1–17
EMERGENCY SYSTEM FLUID PRESSURE	1–17
MISCELLANEOUS LIMITATIONS	1–17
INSTRUMENT MARKINGS	1–18
ELECTRONIC DISPLAY UNIT FORMATS	1–19
PLACARDS	1–41

LIST OF ILLUSTRATIONS

		Page
Figure 1-1.	Airspeed Limitations - VNE (Power on).	1-4
Figure 1-2.	Airspeed Limitations - VNE (Power off/OEI).	1-5
Figure 1-3.	(sheet 1 of 2). Longitudinal CG limits (metric).	1-7
Figure 1-3.	(sheet 2 of 2). Longitudinal CG limits (english).	1-8
Figure 1-4.	(sheet 1 of 2). Lateral CG limits (metric).	1-8A
Figure 1-4.	(sheet 2 of 2). Lateral CG limits (english).	1-8B
Figure 1-5.	Engine oil pressure limits	1-16
Figure 1-6.	Airspeed indicator	1-18
Figure 1-7.	EDU 1 - START Mode (AEO)	1-20
Figure 1-8.	EDU 1 - CRUISE Mode (AEO)	1-20
Figure 1-9.	EDU 1 - OEI Mode	1-21
Figure 1-10.	EDU 1 - AUTOROTATION Mode	1-21
Figure 1-11.	Blank	1-22
Figure 1-12.	EDU 2 - MAIN Mode	1-22
Figure 1-13.	EDU 2 - AUXILIARY Mode	1-23
Figure 1-14.	EDU 1 and/or EDU 2 - REVERSIONARY Mode	1-23
Figure 1-15.	GAS GENERATOR SPEED (AEO)	1-24
Figure 1-16.	GAS GENERATOR SPEED (OEI)	1-25
Figure 1-17.	TURBINE OUTLET TEMPERATURE (AEO)	1-26

FOR TRAINING ONLY

List of illustrations (Contd.)

		Page
Figure 1-18.	TURBINE OUTLET TEMPERATURE (OEI)	1-27
Figure 1-19.	EDU 1 - TORQUE (AEO)	1-28
Figure 1-20.	EDU 1 - TORQUE (OEI)	1-29
Figure 1-21.	EDU 1 - ROTOR POWER TURBINE SPEED (AEO)	1-30
Figure 1-22.	EDU 1 - ROTOR SPEED (Power off)	1-31
Figure 1-23.	EDU 1 - ROTOR POWER TURBINE SPEED (OEI)	1-32
Figure 1-24.	EDU 2 (MAIN) - ENGINE OIL PRESSURE	1-33
Figure 1-25.	EDU 2 (MAIN) - ENGINE OIL TEMPERATURE	1-34
Figure 1-25A.	EDU 2 (MAIN) - ENGINE OIL TEMPERATURE	1-34A
Figure 1-26.	EDU 2 (MAIN) - TRANSMISSION OIL (PRESSURE AND TEMPERATURE	1-35
Figure 1-27.	EDU 2 (MAIN/AUXILIARY) - MAIN HYDRAULIC SYSTEM PRESSURE	1-36
Figure 1-28.	EDU 2 (MAIN) - FUEL PRESSURE	1-37
Figure 1-29.	EDU 2 (AUXILIARY) - AMMETER	1-38
Figure 1-30.	EDU 2 (AUXILIARY) - UTILITY HYDRAULIC SYSTEM PRESSURE (NORMAL)	1-39
Figure 1-31.	EDU 2 (AUXILIARY) - UTILITY HYDRAULIC SYSTEM PRESSURE (EMERGENCY)	1-40

FOR TRAINING ONLY

FOR TRAINING ONLY

SECTION 1
LIMITATIONS

GENERAL

COMPLIANCE WITH THE OPERATING LIMITATIONS IN SECTION 1 OF THIS MANUAL IS MANDATORY.
THE HELICOPTER MUST ALSO BE OPERATED IN ACCORDANCE WITH THE APPROPRIATE OPERATING RULES.

BASIS OF CERTIFICATION

The helicopter is certified under FAR Part 27 with the exemption to para 27.1(a) for maximum gross weight increase to 2850 kg (6283 lb).

TYPE OF OPERATION

This helicopter, in the basic configuration, is approved for operation under day and night VFR, non-icing conditions.
The IFR configured helicopter is certified for IFR operation during day and night non-icing conditions.
No aerobatic manoeuvres are permitted.

VFR OPERATION

The operation is authorized at night under visual contact flying conditions. The orientation shall be maintained by visual reference to ground objects, solely as a result of lights on the ground or adequate celestial illumination.

FLIGHT WITH DOORS REMOVED

Flight with doors removed is prohibited.

FOR TRAINING ONLY

IFR OPERATION

REQUIRED EQUIPMENT FOR IFR FLIGHT SINGLE PILOT

In addition to that required for VFR day and night flight, the following items must be operational before IFR flight is initiated.

— SAS1, SAS2, ATTD HOLD
— Pilot's flight instruments as follows:
  - Attitude director indicator (ADI)
  - Horizontal situation indicator (HSI) and course deviation indicator (CDI)
  - Attitude indicator - Stand-by
  - Instantaneous vertical speed indicator (I.V.S.I.)
  - Encoding altimeter
— Pilot's and stand-by intercommunication system
— Dual communication transceivers (VHF 1 and 2)
— VOR/ILS 1
— VOR/ILS 2 with additional course selector indicator (CSI)
— ADF
— ATC Transponder
— Clock

Both helipilots (SAS1 and 2), ATTD HOLD mode, and force trim must be engaged for IFR flight.

NOTE

With anyone of the required IFR equipment inoperative, VFR flight is permitted.

FLIGHT WITH ONE OF THE TWO HELIPILOTS INOPERATIVE

IFR flight may be initiated to fly to a repair facility providing IFR qualified second pilot occupies the copilot's station and the aircraft is fitted with dual controls and dual flight instruments.

Following one helipilot failure, climb rate must be limited to 500 FPM and cruise flight above 120 Kts requires the pilot to maintain hands on flight controls.

FOR TRAINING ONLY

OPTIONAL EQUIPMENT

Refer to Section 5 and to pertinent Appendices for additional limitations, procedures and performance data with optional equipment installed.

FLIGHT CREW

The minimum flight crew consists of one pilot who shall operate the helicopter from the right crew seat.
The left crew seat may be used for an additional pilot when the approved dual controls and copilot's instruments are installed.

NUMBER OF SEATS

Eight (pilot included).

AIRSPEED LIMITATIONS (KIAS)

See Figure 1-1 for Airspeed limitations V_{NE} (Power on) and Figure 1-2 for Airspeed limitations V_{NE} (Power off).

Maximum landing gear operating speed V_{LO}	120 KIAS.
Maximum landing gear extended speed V_{LE}	120 KIAS.
Minimum airspeed in autorotation without close external references	60 KIAS.
Minimum IFR airspeed	50 KIAS.
Minimum speed during IFR approach	55 KIAS.

NOTE

For the steepest demonstrated approach slope see "Approach Angle Vs Airspeed and Rate of Descent" of Section 2.

FOR TRAINING ONLY

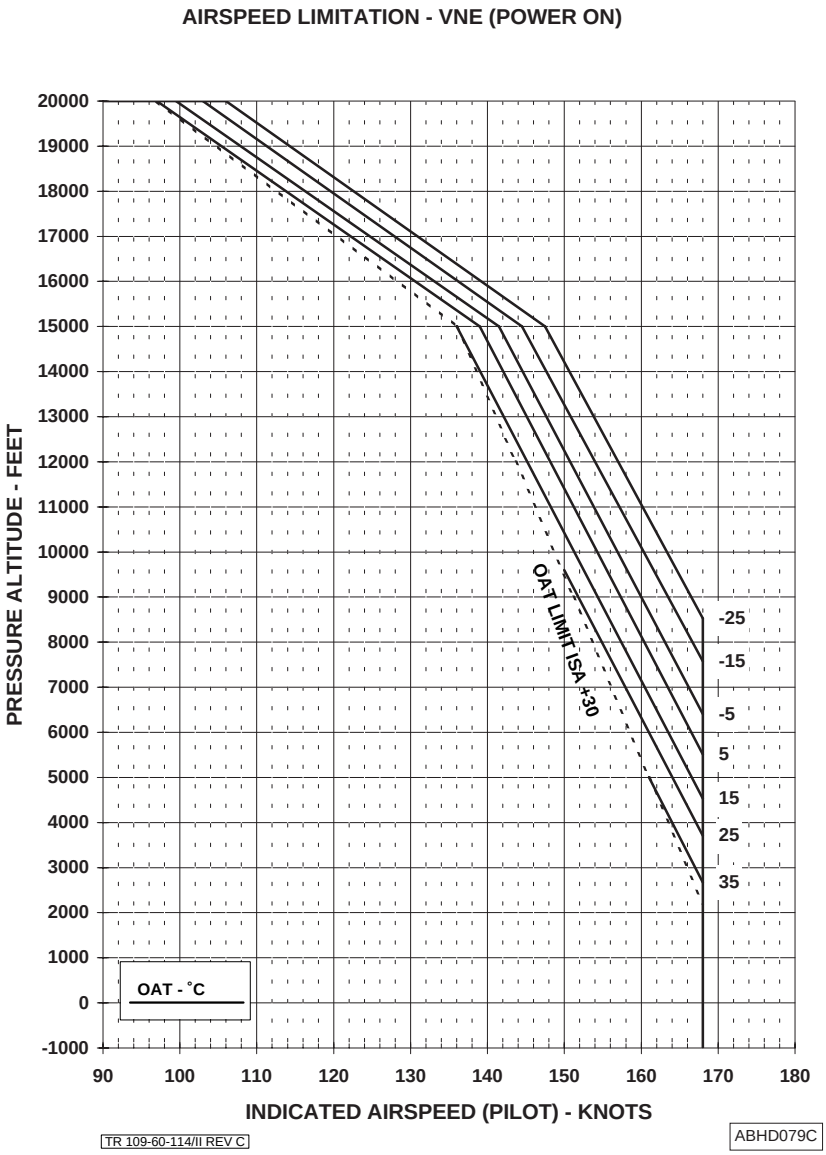

Fig. 1-1. Airspeed Limitations - V_{NE} (Power on).

FOR TRAINING ONLY

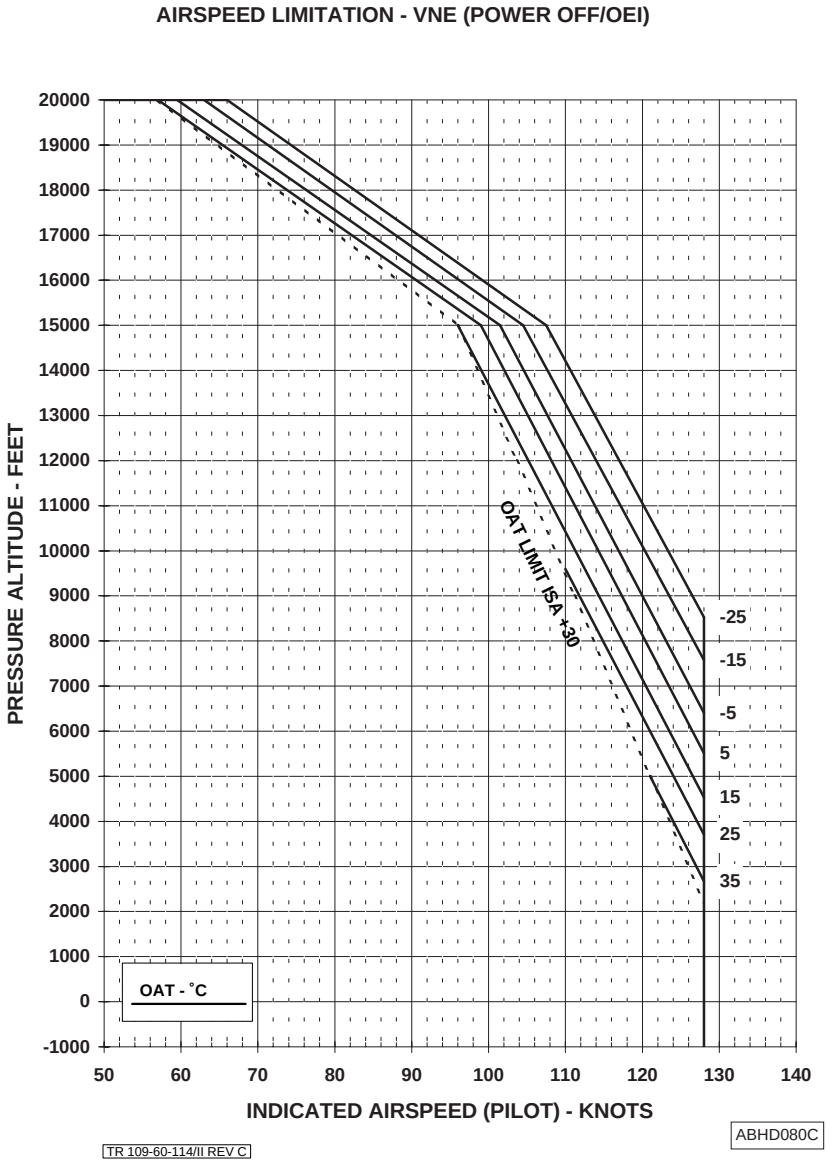

Fig. 1-2. Airspeed Limitations - V_{NE} (Power off/OEI).

FOR TRAINING ONLY

GROUND SPEED LIMITATIONS

On concrete even surfaces:

Maximum speed for running takeoff and landing	: 40 Kts
Maximum taxiing speed (nose wheel unlocked)	
- straight	: 20 Kts
- turn	: 10 Kts

On unprepared or uneven surfaces:

Maximum speed for running takeoff and landing	: 20 Kts
Maximum taxiing speed (nose wheel unlocked)	
- straight	: 20 Kts
- turn	: 10 Kts.

WEIGHT LIMITATIONS

Maximum gross weight for takeoff and landing	: 2850 kg (6283 lb)

NOTE

The maximum takeoff and landing weight may be limited by performance data contained in Section 4.

Minimum gross weight for flight	: 1850 kg (4078 lb)

CENTER OF GRAVITY LIMITATIONS

See figure 1-3 for Longitudinal CG limits and figure 1-4 for Lateral CG limits.

NOTE

The Center of Gravity limits refer to landing gear extended configuration.
There is no significant CG change with landing gear retracted.

FOR TRAINING ONLY

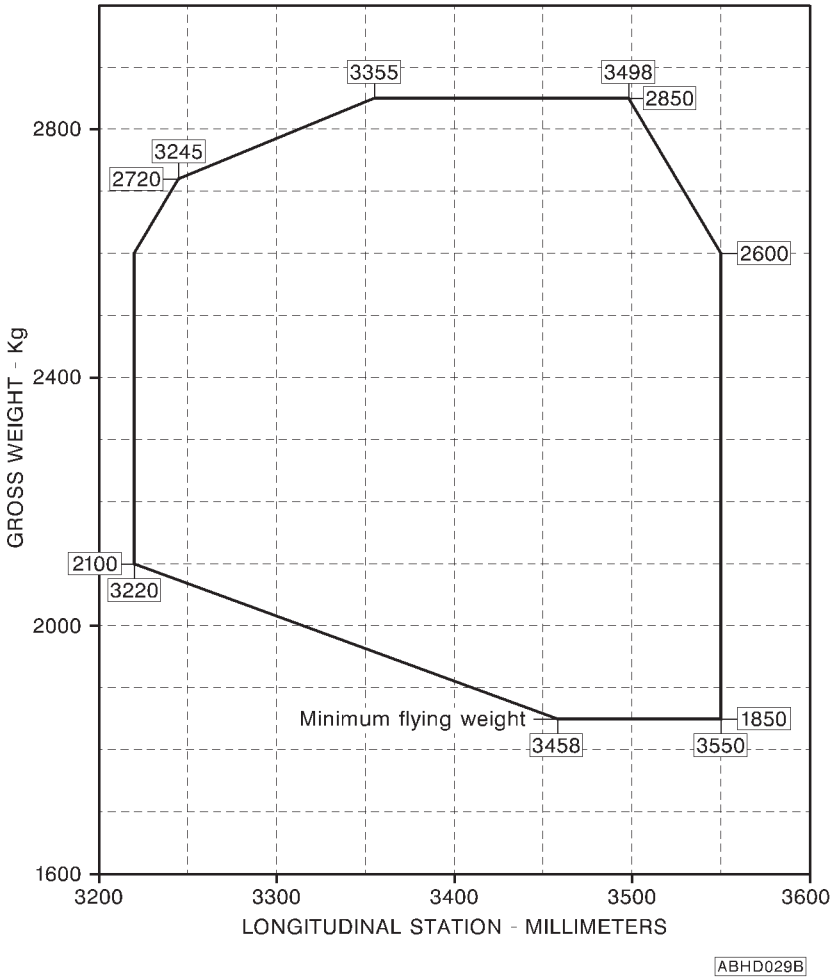

NOTE

Longitudinal Station ″0″ is 1835 mm forward of the front jack point.

Fig. 1-3 (sheet 1 of 2). Longitudinal CG limits (metric).

FOR TRAINING ONLY

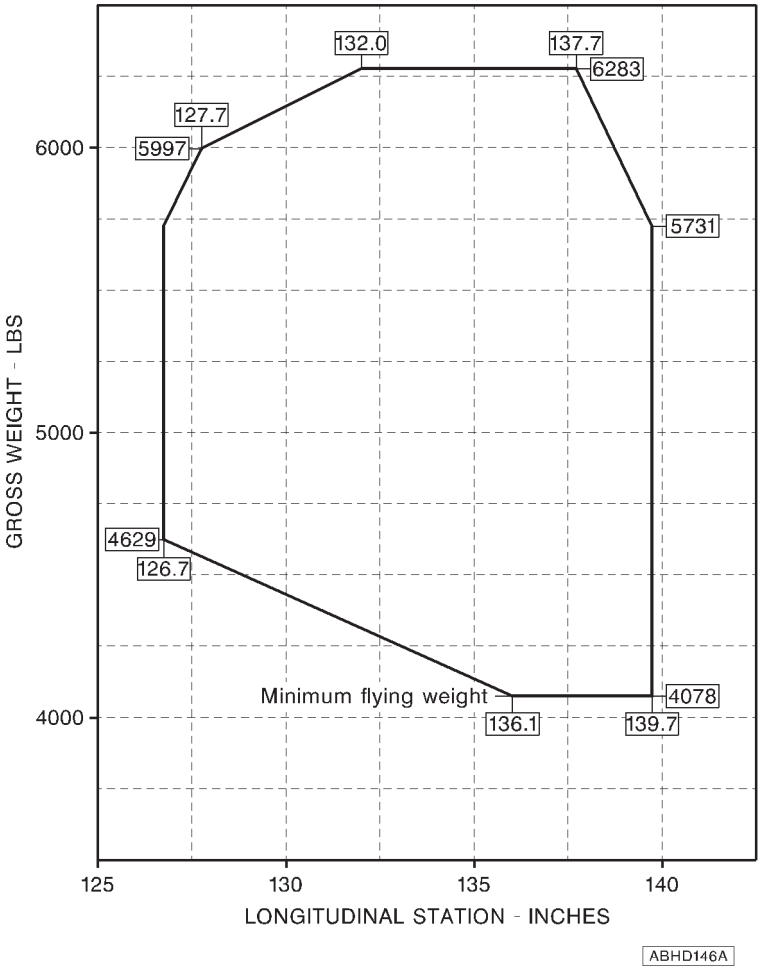

NOTE

Longitudinal Station ″0″ is 72.2 in. forward of the front jack point.

Fig. 1-3 (sheet 2 of 2). Longitudinal CG limits (english).

FOR TRAINING ONLY

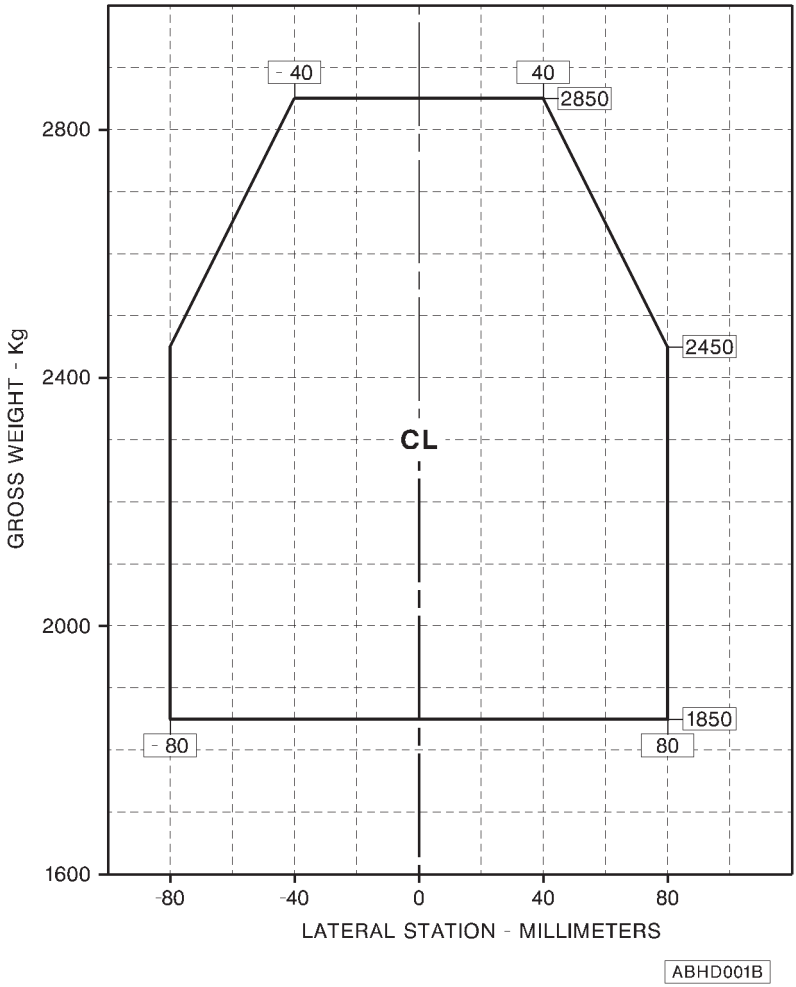

NOTE

The lateral station ″0″ is 450 mm inboard from each main jack point and coincides with the helicopter longitudinal plane of symmetry.

Fig. 1-4 (sheet 1 of 2). Lateral CG limits (metric).

FOR TRAINING ONLY

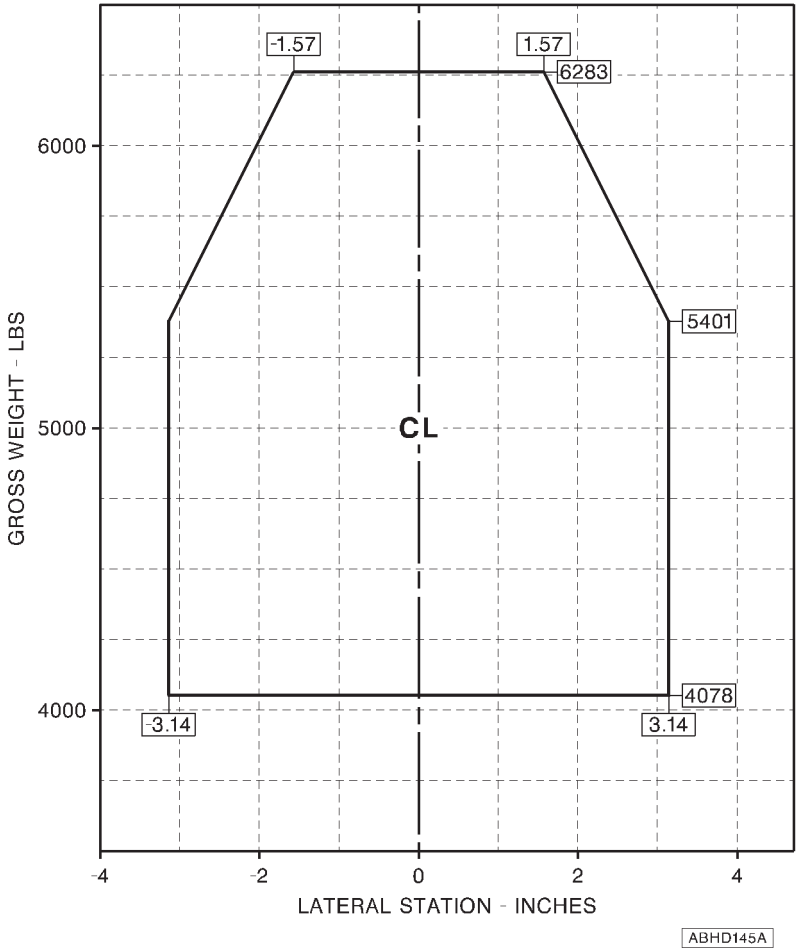

NOTE

The lateral station ″0″ is 17.7 in. inboard from each main jack point and coincides with the helicopter longitudinal plane of symmetry.

Fig. 1-4 (sheet 2 of 2). Lateral CG limits (english).

FOR TRAINING ONLY

BAGGAGE COMPARTMENT LIMITATIONS

Maximum load : 150 kg (330 lb)

NOTE

Refer to Section 6, Weight and Balance, for load distribution.

Maximum unit load : 500 kg/m^2 (102 lbs/sq ft)

FOR TRAINING ONLY

FOR TRAINING ONLY

ALTITUDE LIMITATIONS

Maximum pressure altitude for takeoff and landing:	: 15000 ft (4572 m)
Maximum operating pressure altitude:	: 20000 ft (6096m)

AMBIENT AIR TEMPERATURE LIMITATIONS

The minimum ambient air temperature for operation is -25°C (-13°F).
The maximum sea level ambient air temperature for operation is +45°C (113°F) and decreases with pressure altitude at the standard lapse rate of 2°C (3.6°F) every 1000 ft (305 m) up to 20000 ft (6096 m).

POWER PLANT LIMITATIONS

The helicopter is powered by two (2) Pratt & Whitney Canada Inc. PW206C turboshaft engine.

GAS GENERATOR (N1) RPM

NOTE

100% N1 corresponds to 58000 RPM.

All engines operative (AEO)

Continuous operation	: 50 to 97.4%
Maximum continuous	: 97.4%
Takeoff range	: 97.4% to 98.7%
Maximum	: 98.7%
Transient (20 sec)	: 103.4%

FOR TRAINING ONLY

One engine inoperative (OEI)

Continuous operation	: 50 to 100.4%
Maximum continuous	: 100.4%
2.5 minute range	: 100.4 to 102.4%
Maximum	: 102.4%
Transient (20 sec)	: 103.4%

POWER TURBINE (N2) RPM

NOTE

100% N2 corresponds to 6000 RPM output shaft speed and to 39807 RPM power turbine speed.

All engines operative (AEO)

Minimum	: 99%
Continuous operation	: 99 to 101%
Takeoff and landing	: 101 to 102%
Maximum	: 102%
Transient (20 sec)	: 112.4%

One engine inoperative (OEI)

Minimum	: 90%
Takeoff and landing (real emergency and/or equivalent cat. ″A″ operations only)	: 90 to 99%
Continuous operation	: 99 to 101%
Takeoff and landing	: 101 to 102%
Maximum	: 102%
Transient (20 sec)	: 112.4%

FOR TRAINING ONLY

TURBINE OUTLET TEMPERATURE (TOT)

All engines operative (AEO)

Maximum continuous	: 820°C
Takeoff (5 min) range	: 820°C to 863°C
Maximum	: 863°C

One engine inoperative (OEI)

Maximum continuous	: 885°C
2.5 min range	: 885°C to 930°C
Maximum	: 930°C
Transient (20 sec)	: 972°C
Starting (2 sec)	: 875°C

ROTOR LIMITATIONS

NOTE

100% rotor speed corresponds to 384 RPM.

Power On (AEO)

Minimum	: 99%
Continuous operation	: 99 to 101%
Takeoff and landing (below 60 KIAS and 1000 ft AGL)	: 101 to 102%.

NOTE

During an instrumental approach procedure the use of 102% NR is allowed up to 120 KIAS.

Maximum	: 102%

FOR TRAINING ONLY

Power On (OEI)

Minimum	: 90%
Takeoff and landing	: 90 to 99%
Continuous operation	: 99 to 101%
Takeoff and landing (below 60 KIAS and 1000 ft AGL)	: 101 to 102%

NOTE

During an instrumental approach procedure the use of 102% NR is allowed up to 120 KIAS.

Maximum	: 102%

Power Off

Minimum	: 90%
Continuous operation	: 90 to 110%
Maximum	: 110%

TRANSMISSION LIMITATIONS

TORQUE (TRQ%)

NOTE

100% torque corresponds to 534 Nm (394 ft lb).

All engines operative (AEO)

Maximum continuous	: 100%
Transient (6 sec)	: 110%

FOR TRAINING ONLY

One engine inoperative (OEI)

Maximum continuous	: 124%
2.5 min	: 142%
Transient (6 sec)	: 156%

NOTE

The One Engine Inoperative (OEI) rating use is intended for emergency use, when one engine becomes inoperative due to an actual malfunction. OEI operations for maintenance or training purposes shall be limited to the maximum continuous OEI power rating.

NOTE

Transient must not be used intentionally. OEI transient may be used only in case of real emergency, when one engine becomes inoperative due to an actual malfunction.

FUEL SYSTEM LIMITATIONS

Fuel pressure

Cautionary range	: 0 to 7 psi
Normal range	: 7 to 25 psi
Maximum	: 25 psi

Approved fuels

Type	Specification
JET A	ASTM D1655
JET A-1	ASTM D1655
JET A-2	ASTM D1655
JET B	ASTM D1655

FOR TRAINING ONLY

Military Specification (Reference only)

Type	Specification
JP-4 (*) JP-5 (*) JP-8 (*)	MIL-T-5624 MIL-T-5624 MIL-T-83133

(*) Contains fuel system icing inhibitor (FSII). (for JP-8, MIL-T-83133C allows two grades. The grade meeting NATO code F-34 has FSII while the grade meeting code F-35 has no FSII without prior agreement).

NOTE

An approved fuel or any mixture of acceptable fuels may be used. However, changing to a fuel with a substantially different heating value or specific gravity may require maintenance in the form of engine fuel control (trimmer) adjustment.
Refer to Pratt & Whitney manuals.

NOTE

For operation below 4°C the use of anti-ice additive is authorized but not mandatory due to aircraft anti-ice fuel filter installation. For additive requirements and blending procedures refer to Pratt & Whitney manuals.

NOTE

The use of gasoline (avgas) must be restricted to emergency purpose only. Avgas shall not be used for more than 150 hours during any period between overhauls.
Refer to Pratt & Whitney manuals.

FOR TRAINING ONLY

ENGINE LUBRICATION SYSTEM LIMITATIONS

Oil pressure

The oil pressure limits vary as function of the gas generator speed according to figure 1-5. These oil pressure limits must be respected when engine oil temperature is between 71 - 120°C.

Transient : 200 psi

NOTE

The engine can run with oil pressure up to 200 psi during or after a start or if the oil temperature drops significantly below 71°C. Oil pressure will decrease as oil temperature increases and is not expected to endure for more than 5 sec. The operation at an oil pressure above the normal range (up to 200 psi) is permitted for a period of 10 minutes.

Oil temperature

Maximum : 125°C

Approved lubricating oils (Type II, 5 cSt)

DESIGNATION	SPECIFICATION
BP Turbo Oil 2380 / EXXON Turbo Oil 2380	MIL-PRF-23699F
BP Turbo Oil 25 / EXXON Turbo Oil 25	MIL-PRF-23699F
AeroShell Turbine Oil 500	MIL-PRF-23699F
AeroShell Turbine Oil 560	MIL-PRF-23699F
Royco Turbine Oil 500	MIL-PRF-23699F
Royco Turbine Oil 560	MIL-PRF-23699F
Turbonycoil 525-2A	PWA 521
Mobil Jet Oil II	MIL-PRF-23699F
Castrol 5000	MIL-PRF-23699F

NOTE

Mixing of oils of different brands, type and Manufacturers is prohibited.

FOR TRAINING ONLY

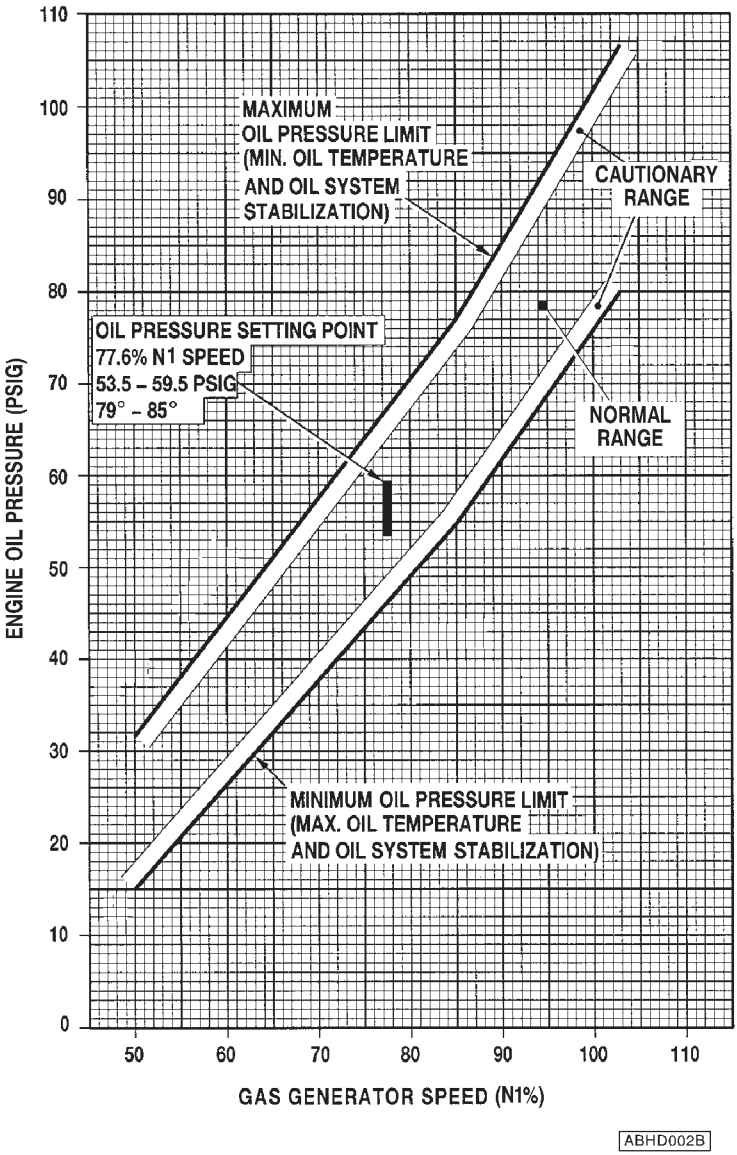

Fig. 1-5. Engine oil pressure limits

FOR TRAINING ONLY

MAIN TRANSMISSION LUBRICATION SYSTEM LIMITATIONS

Oil pressure

Minimum	: 30 psi
Normal range	: 30 to 50 psi
Cautionary range	: 50 to 70 psi
Maximum	: 70 psi

Oil temperature

Maximum	: 115 °C

Approved lubricating oils

DESIGNATION	SPECIFICATION
BP Turbo Oil 2380 / EXXON Turbo Oil 2380	MIL-PRF-23699
BP Turbo Oil 2197	MIL-PRF-23699
Mobil Oil Jet II	MIL-PRF-23699
Mobil Oil Jet 254	MIL-PRF-23699
AeroShell Turbine Oil 500	MIL-PRF-23699
AeroShell Turbine Oil 555	DOD-L-85734
AeroShell Turbine Oil 560	DOD-L-85734
Castrol 5000	MIL-PRF-23699

Oils limited to ambient temperature above -40°C (-40°F).

NOTE

Mixing of oils of different brands, type and Manufacturers is prohibited.

FOR TRAINING ONLY

TAIL ROTOR GEARBOX LUBRICANT LIMITATIONS

Approved lubricating oils

DESIGNATION	SPECIFICATION
BP Turbo Oil 2380 / EXXON Turbo Oil 2380	MIL-PRF-23699
BP Turbo Oil 2197	MIL-PRF-23699
Mobil Oil Jet II	MIL-PRF-23699
Mobil Oil Jet 254	MIL-PRF-23699
AeroShell Turbine Oil 500	MIL-PRF-23699
AeroShell Turbine Oil 555	DOD-L-85734
AeroShell Turbine Oil 560	DOD-L-85734
Castrol 5000	MIL-PRF-23699

Oils limited to ambient temperature above -40°C (-40°F).

NOTE

Mixing of oils of different brands, type and Manufacturers is prohibited.

ENGINE STARTER LIMITATIONS

The engine starter duty cycle is the following:

— 30 seconds on, 1 minute off
— 30 seconds on, 1 minute off
— 30 seconds on, 30 minutes off

GENERATOR LIMITATIONS

Helicopter equipped with emergency bus:

For each generator

Continuous operation : 0 to 160 A

FOR TRAINING ONLY

Maximum	: 160 A
Transient (20 seconds)	: 200 A

Helicopter not equipped with emergency bus:

For each generator

Continuous operation	: 0 to 130 A
Maximum	: 130 A
Transient (20 seconds)	: 160 A

FOR TRAINING ONLY

MAIN HYDRAULIC SYSTEM LIMITATIONS

FLUID PRESSURE

Minimum	: 1200 psi
Cautionary range	: 1200 to 1400 psi
Normal range	: 1400 to 1550 psi
Maximum	: 1550 psi

Approved fluids

The following hydraulic fluids are approved:

MIL-PRF-5606
MIL-PRF-83282

NOTE

Mixing of fluids of different types is prohibited. When changing type of oil, the hydraulic system must be drained and completely flushed.

WARNING

Operation of each hydraulic system must be checked before each flight in accordance with Section 2 of this manual.

FOR TRAINING ONLY

UTILITY HYDRAULIC SYSTEM LIMITATIONS

NORMAL SYSTEM FLUID PRESSURE

Minimum	: 500 psi
Cautionary range	: 500 to 1140 psi
Normal range	: 1140 to 1550 psi
Maximum	: 1550 psi

EMERGENCY SYSTEM FLUID PRESSURE

Minimum	: 1140 psi
Maximum	: 1550 psi

Approved fluids

The following hydraulic fluids are approved:

MIL-PRF-5606

MIL-PRF-83282

NOTE

Mixing of fluids of different types is prohibited. When changing type of oil, the hydraulic system must be drained and completely flushed.

MISCELLANEOUS LIMITATIONS

Listening of VHF1 and VHF2 communications from passengers cabin 3rd ICS station (if installed) must be authorized by the flying pilot.

FOR TRAINING ONLY

INSTRUMENT MARKINGS

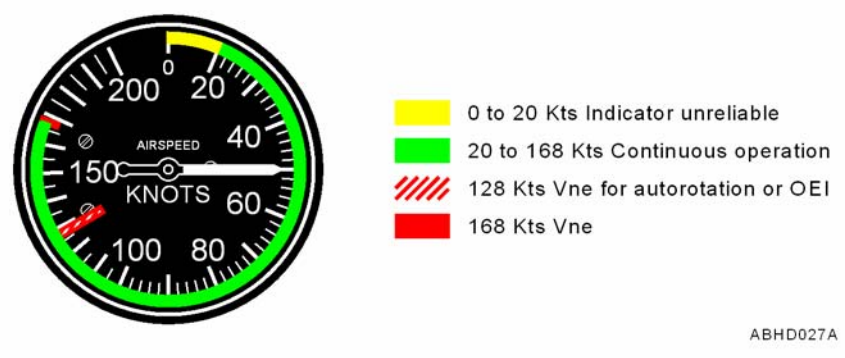

Fig. 1-6. Airspeed indicator

FOR TRAINING ONLY

INSTRUMENT MARKINGS



0 to 20 Kts Indicator unreliable

20 to 140 Kts Continuous operation

128 Kts V_{NE} for autorotation or OEI

140 Kts V_{NE}

ABHD473A

Fig. 1-6. Airspeed indicator

FOR TRAINING ONLY

ELECTRONIC DISPLAY UNIT FORMATS

The EDUs present the following information:

EDU 1

- N1
- NR/N2
- TOT
- TRQ
- Caution, warning and advisory messages

EDU 2

- Engine oil pressure
- Engine oil temperature
- Transmission oil pressure
- Transmission oil temperature
- Fuel pressure
- Fuel quantity
- Fuel flow (provision only)
- Main hydraulic pressure
- Utility hydraulic pressure
- DC ammeter
- DC voltmeter
- AC voltmeter
- OAT
- Advisory and status messages

The main display formats are:

EDU 1
- START
- CRUISE { AEO, OEI, AUTOROTATION

EDU 2
- MAIN
- AUXILIARY

- REVERSIONARY { AEO, OEI, AUTOROTATION

FOR TRAINING ONLY

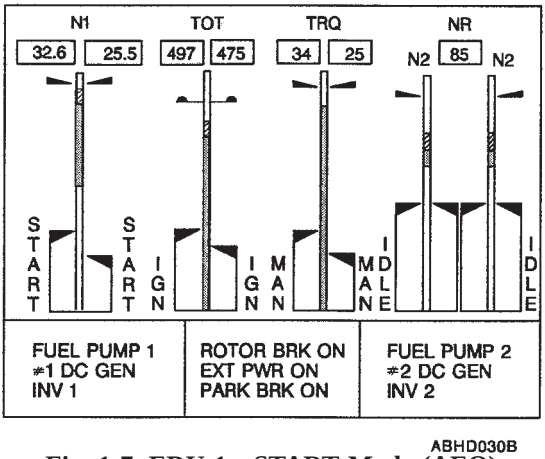

Fig. 1-7. EDU 1 - START Mode (AEO)

The START mode is displayed when selected by the START key on EDU 1.

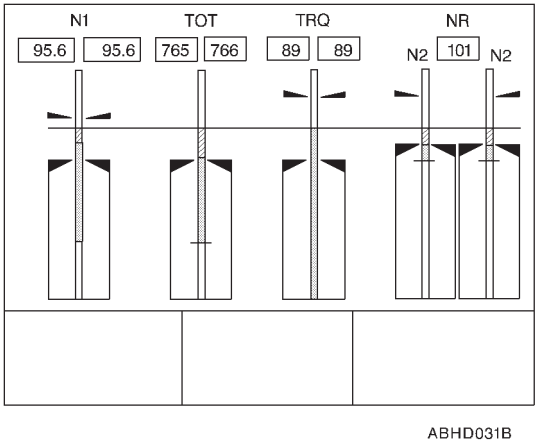

Fig. 1-8. EDU 1 - CRUISE Mode (AEO)

The CRUISE mode is displayed upon IDS initialization and/or when selected by the CRUISE key or automatically at the end of the start sequence. It is also displayed automatically on both EDUs in case of complete loss of secondary data.

The cruise (AEO) format is presented also in REVERSIONARY mode.

FOR TRAINING ONLY

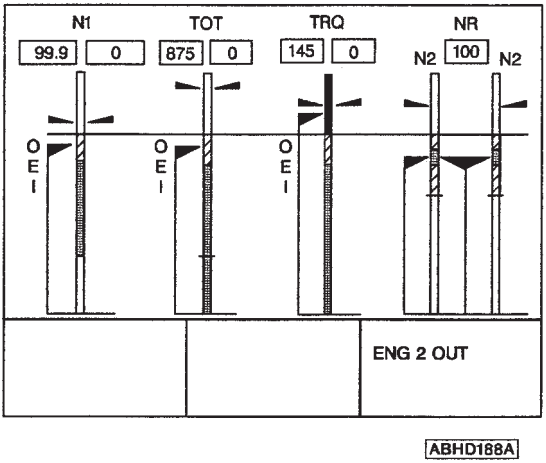

Fig. 1-9. EDU 1 - OEI Mode

The OEI mode is a subset of CRUISE mode and is automatically selected if one engine becomes inoperative.
The OEI format is presented also in REVERSIONARY mode.

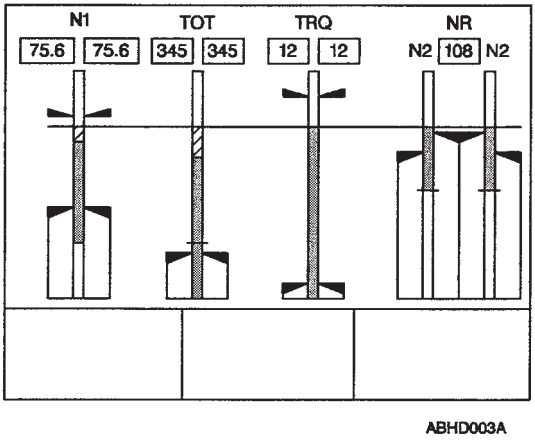

Fig. 1-10. EDU 1 - AUTOROTATION Mode

The AUTOROTATION mode is automatically selected when both engines fail or run at idle, both engine torque inputs are at zero or in presence of NR/N2 split. The AUTOROTATION format is presented also in REVERSIONARY mode.

FOR TRAINING ONLY

Intentionally blank

Fig. 1-11. Blank

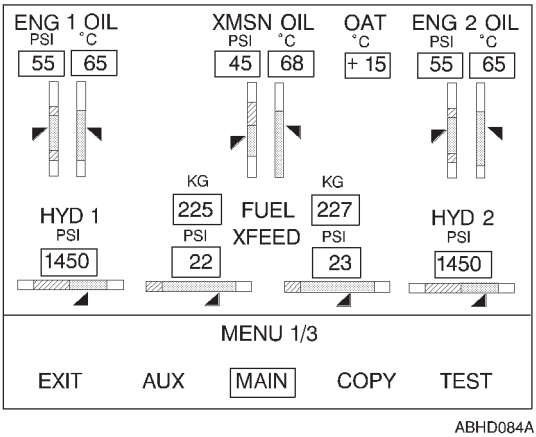

Fig. 1-12. EDU 2 - MAIN Mode

The MAIN mode is displayed upon IDS initialization and/or when selected by the MAIN key on EDU 2.

FOR TRAINING ONLY

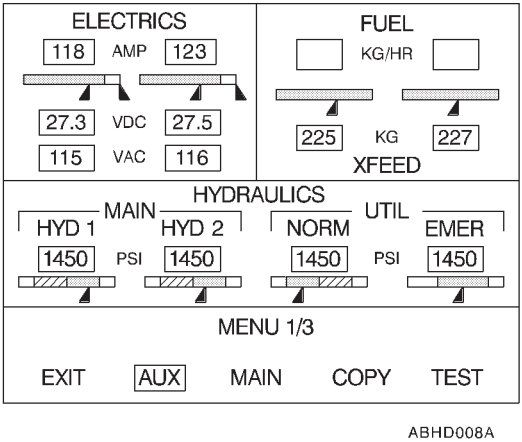

Fig. 1-13. EDU 2 - AUXILIARY Mode

The AUXILIARY mode can be displayed by selecting the AUX key on EDU 2. The AUXILIARY page reverts automatically to the MAIN page when any caution/warning message occurs.

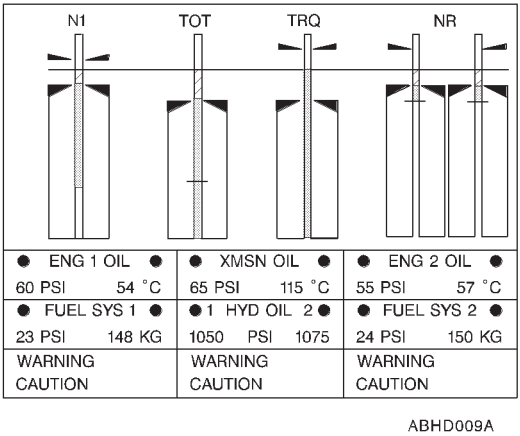

Fig. 1-14. EDU 1 and/or EDU 2 - REVERSIONARY Mode

Any EDU enters in the REVERSIONARY mode when it is manually commanded by pressing the ON/OFF switch to OFF on the failed EDU or automatically when a critical failure occurs and is detected by the healthy EDU.

FOR TRAINING ONLY

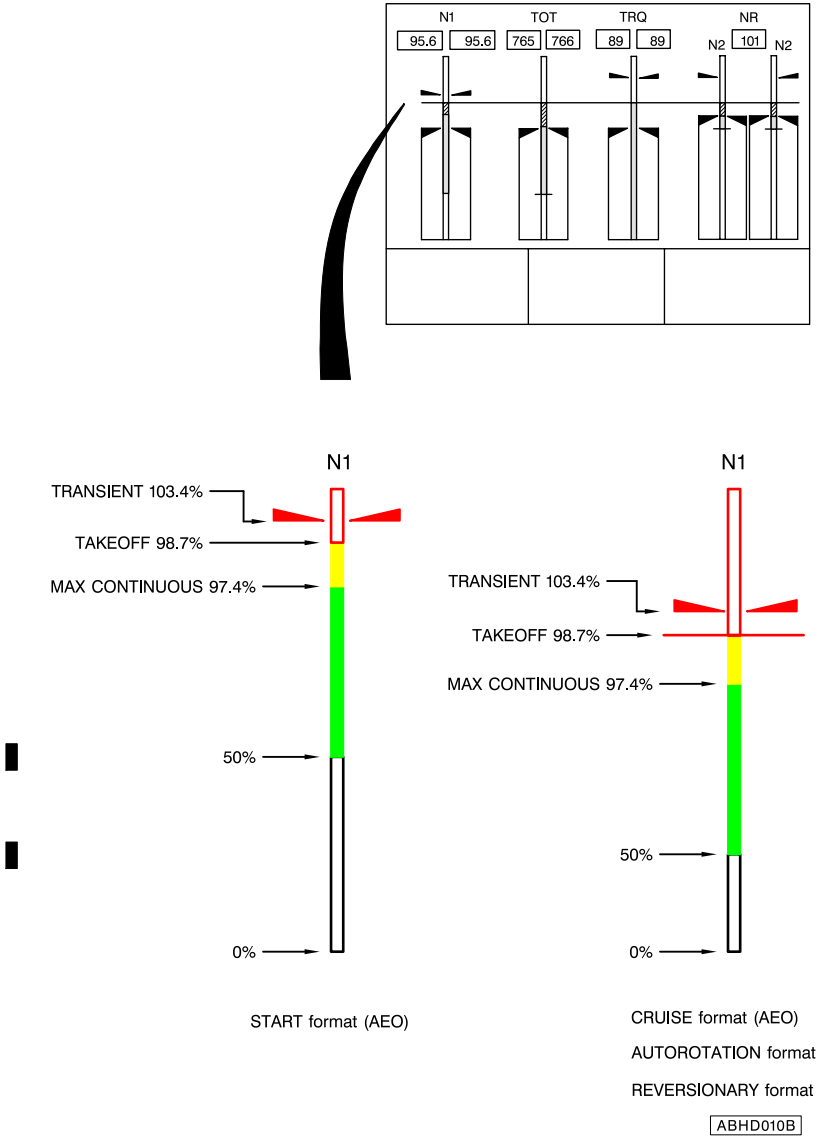

Fig. 1-15. EDU 1 - GAS GENERATOR SPEED (AEO)

FOR TRAINING ONLY

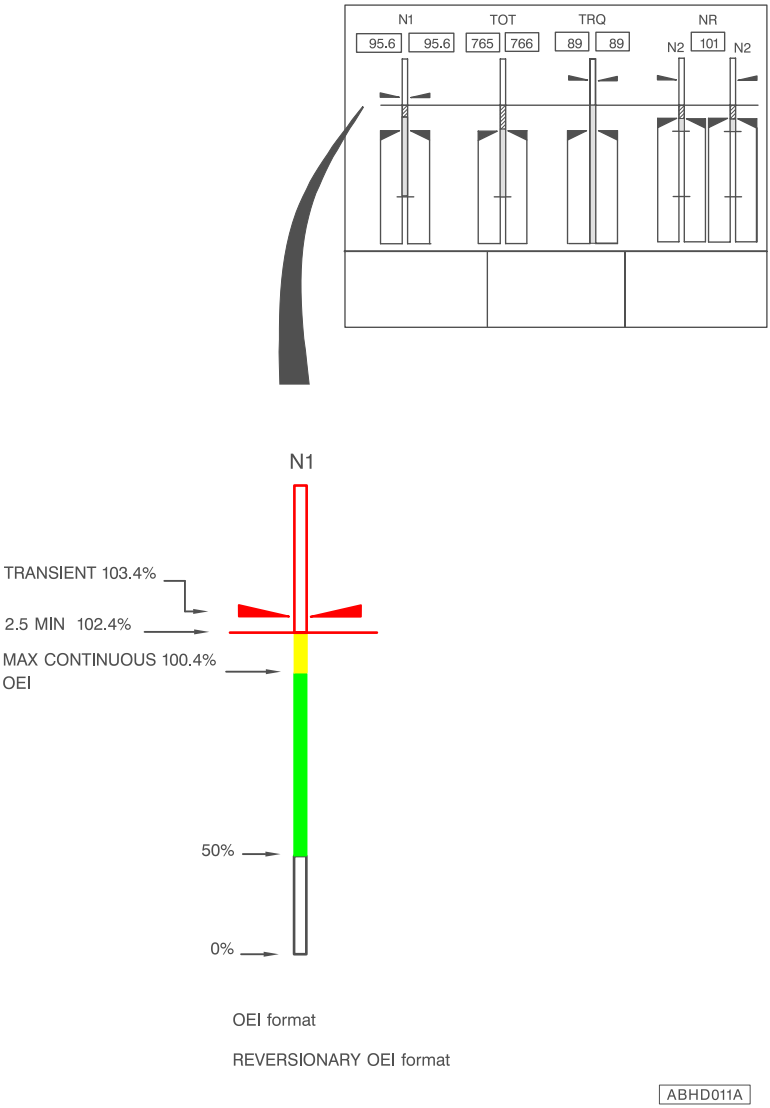

Fig. 1-16. EDU 1 - GAS GENERATOR SPEED (OEI)

FOR TRAINING ONLY

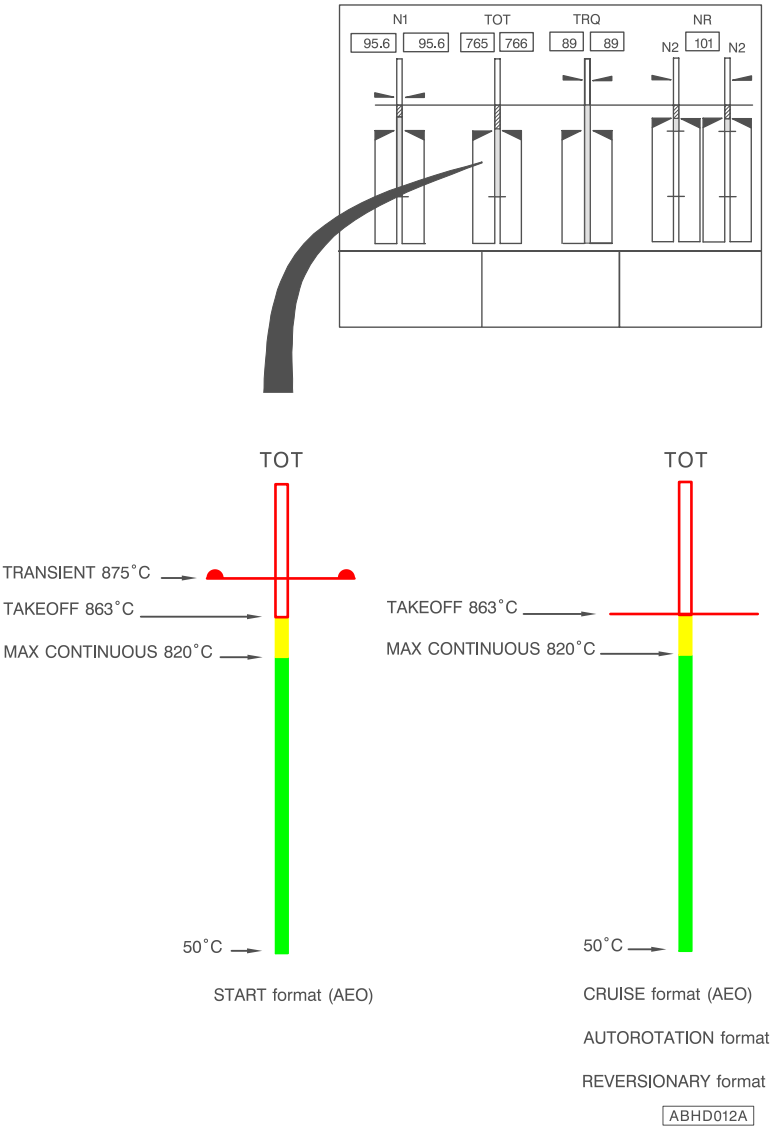

Fig. 1-17. EDU 1 - TURBINE OUTLET TEMPERATURE (AEO)

FOR TRAINING ONLY

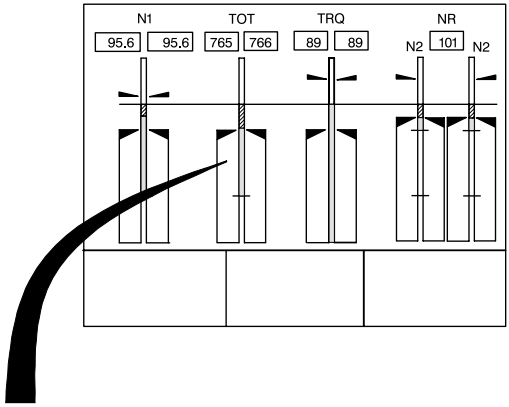

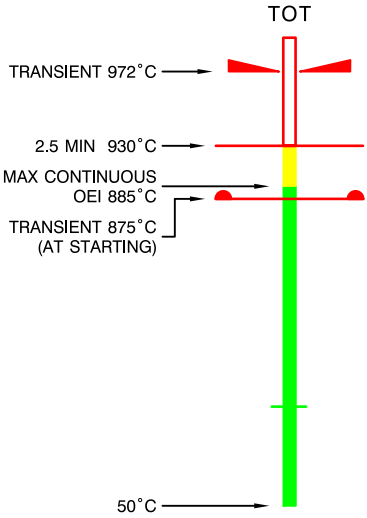

NOTE

The transient value at starting (half red dot at 875˚C) is displayed on the scale of the engine being started, during the restart phase only.

OEI format

REVERSIONARY OEI format

ABHD013B

Fig. 1-18. EDU 1 - TURBINE OUTLET TEMPERATURE (OEI)

FOR TRAINING ONLY

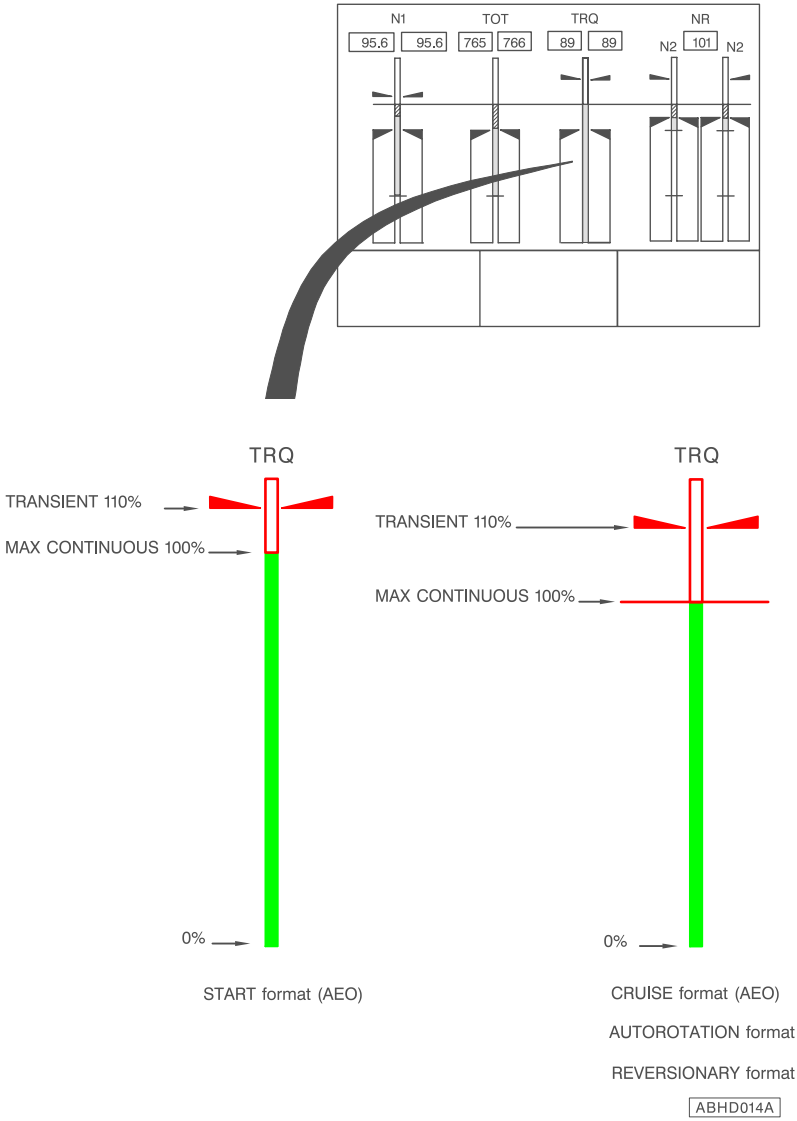

Fig. 1-19. EDU 1 - TORQUE (AEO)

FOR TRAINING ONLY

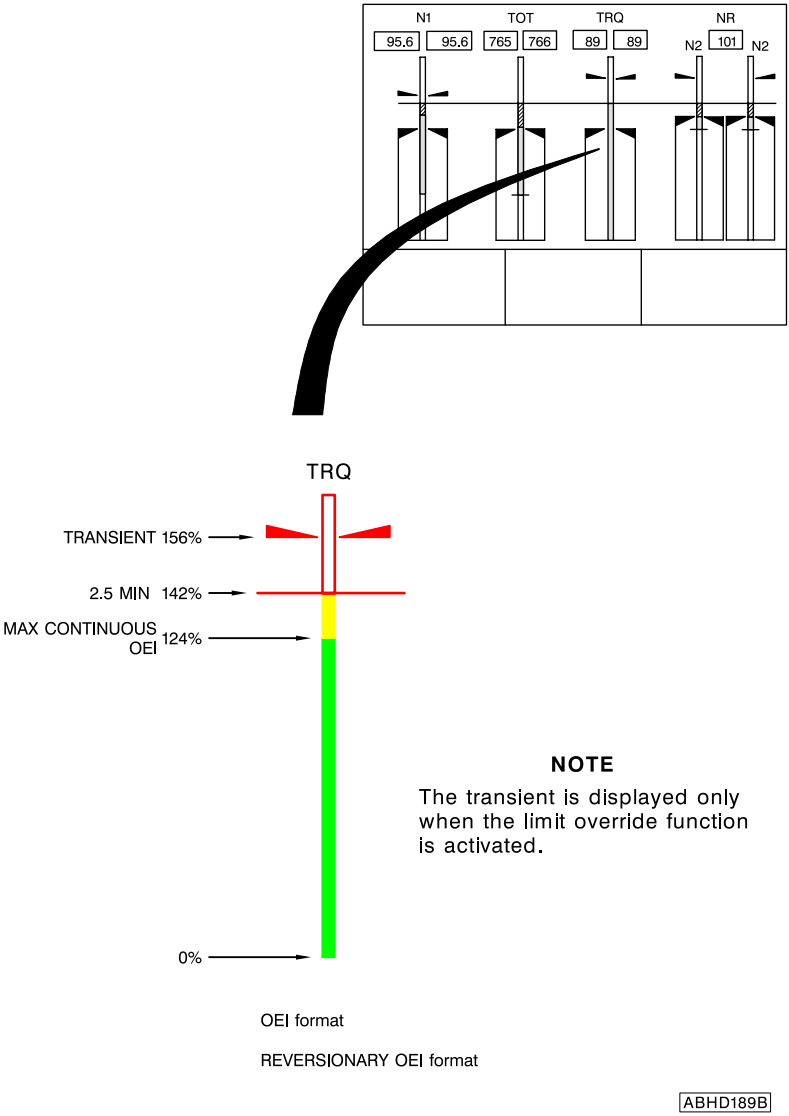

Fig. 1-20. EDU 1 - TORQUE (OEI)

FOR TRAINING ONLY

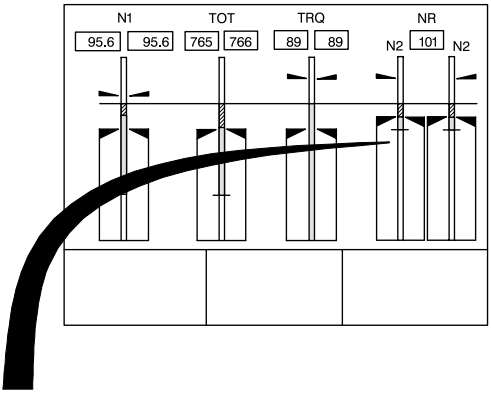

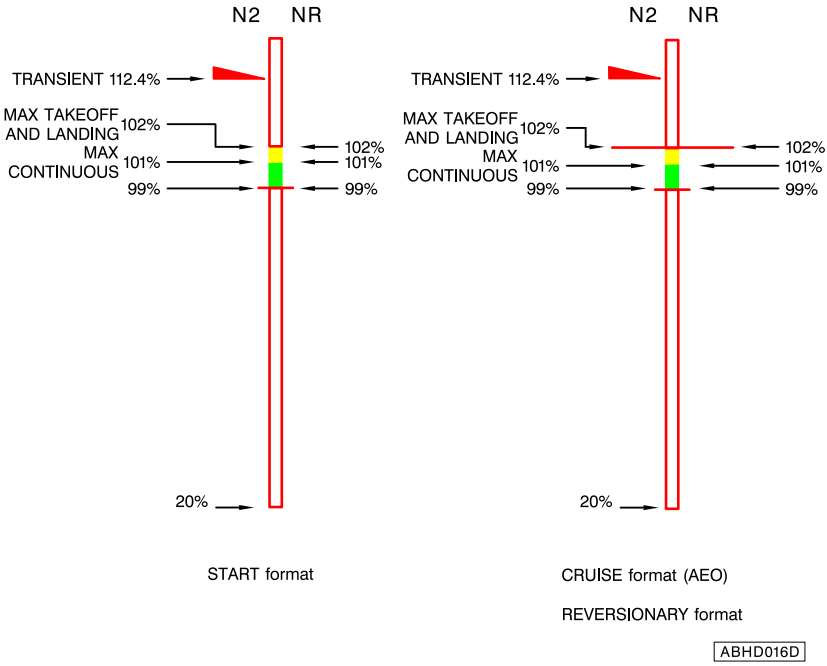

Fig. 1-21. EDU 1 - ROTOR POWER TURBINE SPEED (AEO)

FOR TRAINING ONLY

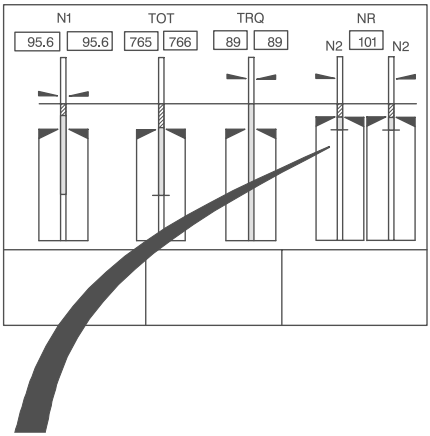

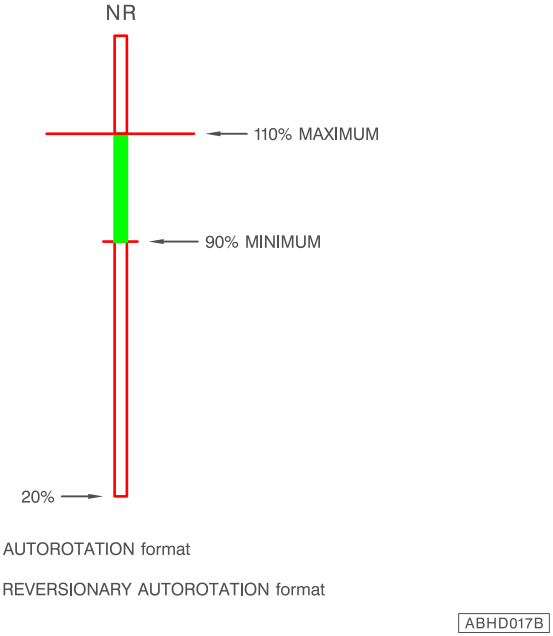

Fig. 1-22. EDU 1 - ROTOR SPEED (Power off)

FOR TRAINING ONLY

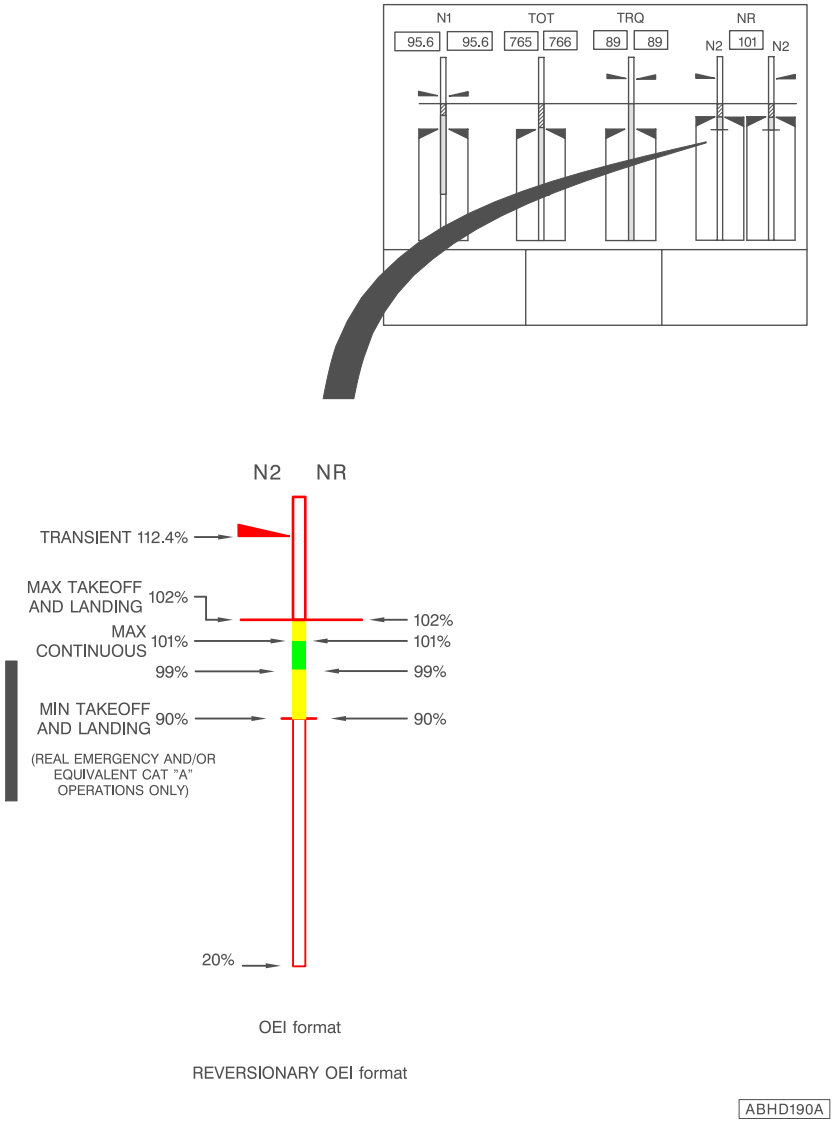

Fig. 1-23. EDU 1 - ROTOR POWER TURBINE SPEED (OEI)

FOR TRAINING ONLY

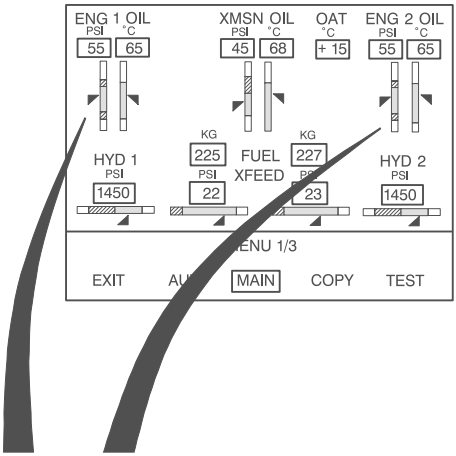

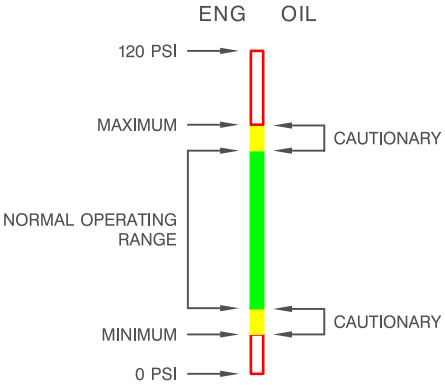

NOTE

The boundaries of colour markings vary according to figure 1-5

ABHD019A

Fig. 1-24. EDU 2 (MAIN) - ENGINE OIL PRESSURE

FOR TRAINING ONLY

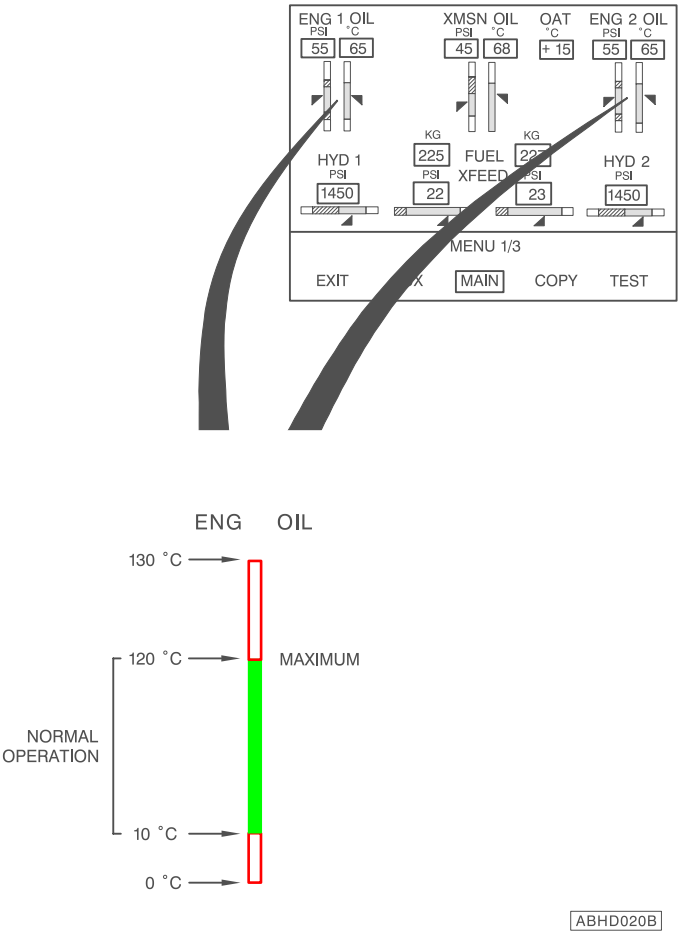

Fig. 1-25. EDU 2 (MAIN) - ENGINE OIL TEMPERATURE

FOR TRAINING ONLY

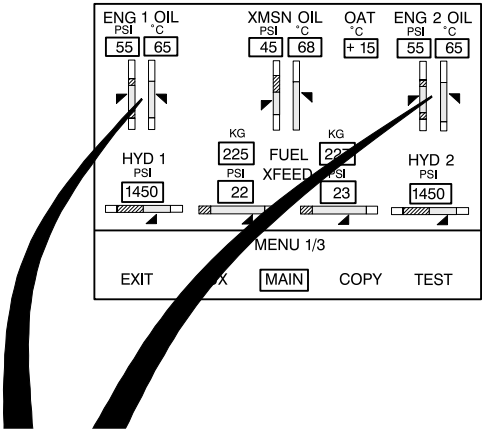

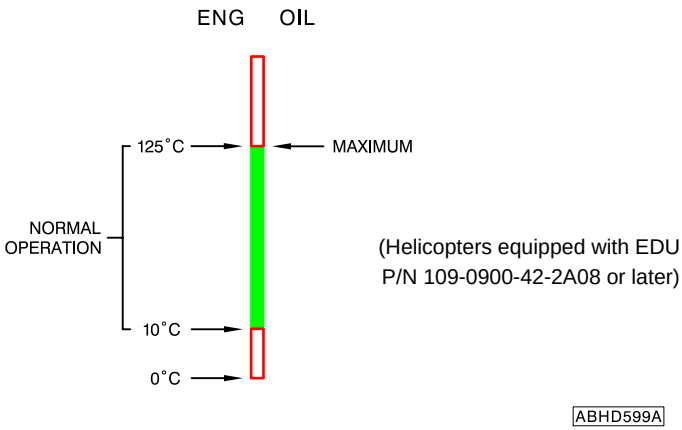

Figure 1-25A. EDU 2 (MAIN) - ENGINE OIL TEMPERATURE.

FOR TRAINING ONLY

FOR TRAINING ONLY

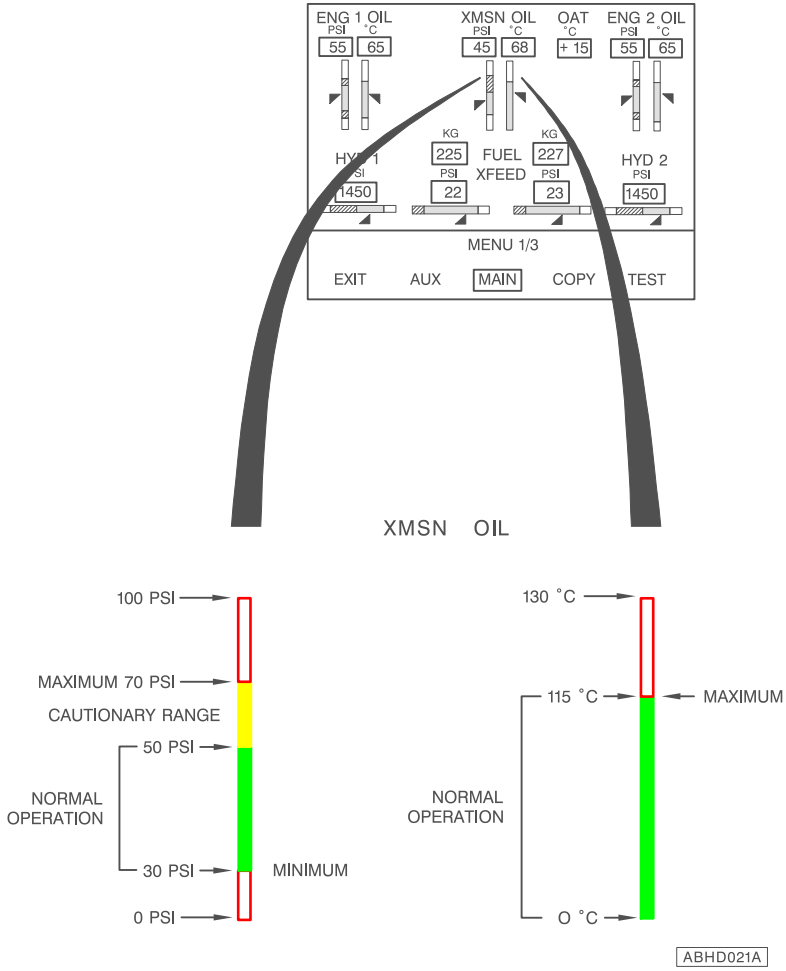

Fig. 1-26. EDU 2 (MAIN) - TRANSMISSION OIL (PRESSURE AND TEMPERATURE)

FOR TRAINING ONLY

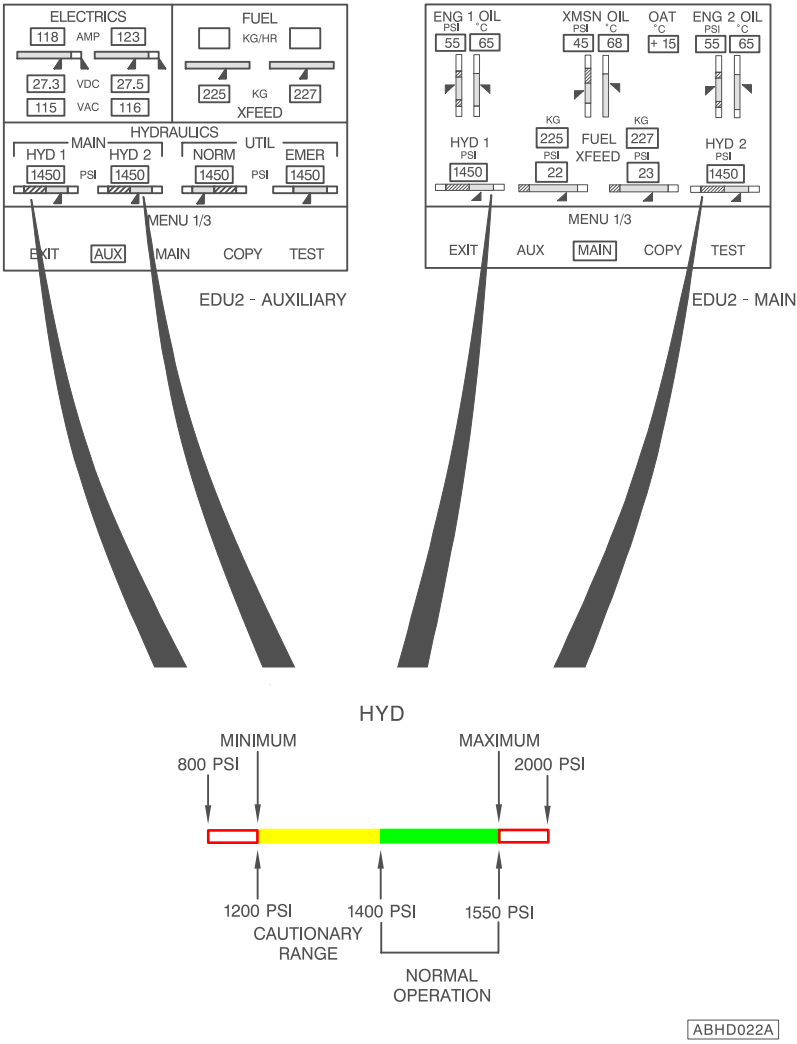

Fig. 1-27. EDU 2 (MAIN/AUXILIARY) - MAIN HYDRAULIC SYSTEM PRESSURE

FOR TRAINING ONLY

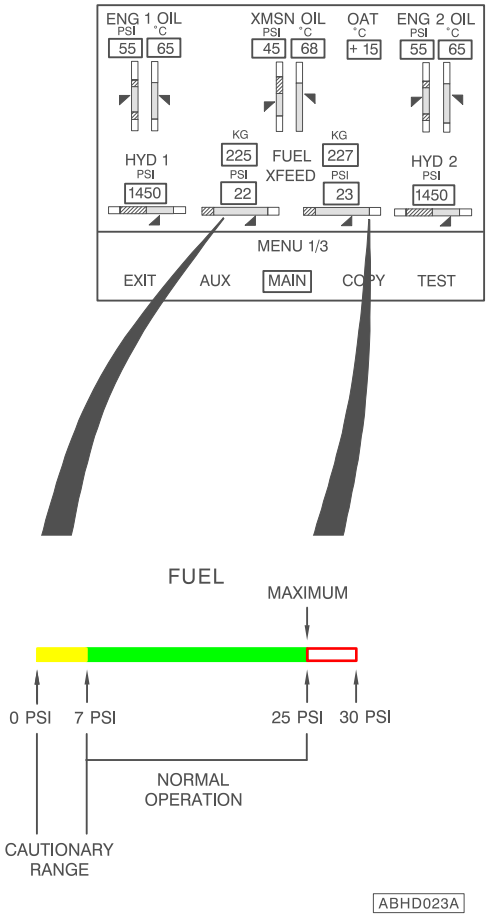

Fig. 1-28. EDU 2 (MAIN) - FUEL PRESSURE

FOR TRAINING ONLY

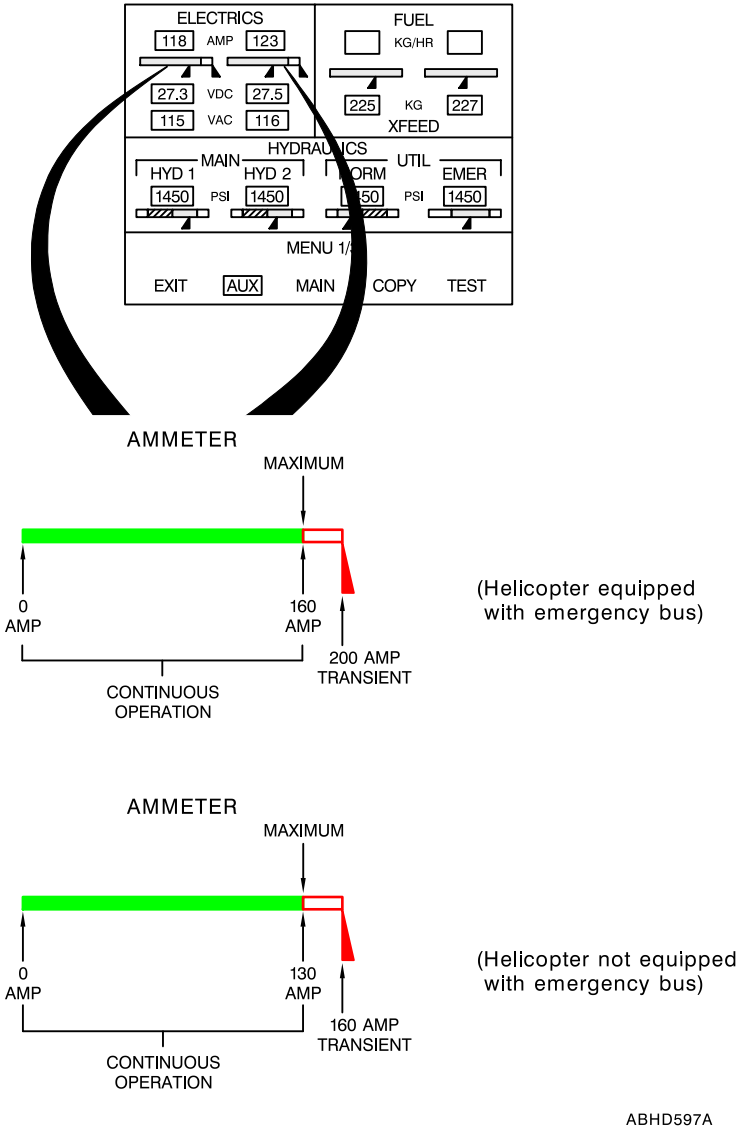

Fig. 1-29. EDU 2 (AUXILIARY) - AMMETER.

FOR TRAINING ONLY

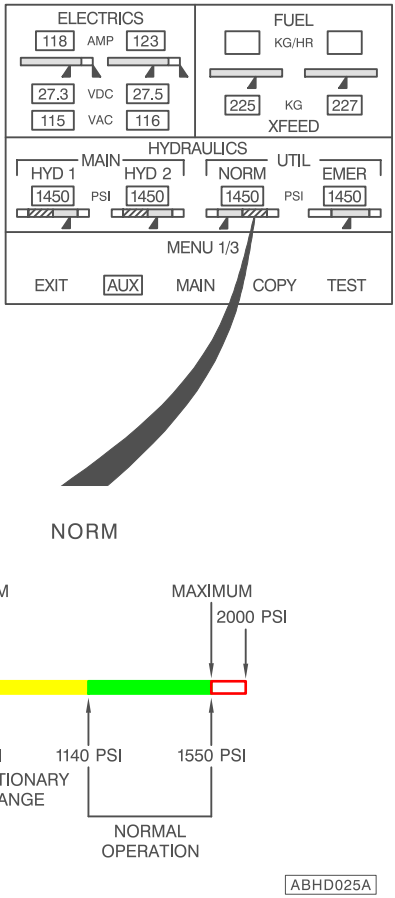

Fig. 1-30. EDU 2 (AUXILIARY) - UTILITY HYDRAULIC SYSTEM PRESSURE (NORMAL)

FOR TRAINING ONLY

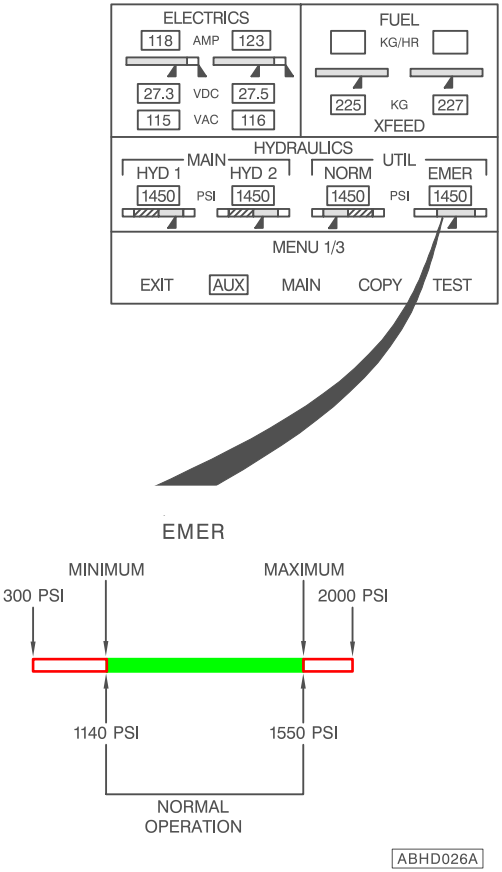

Fig. 1-31. EDU 2 (AUXILIARY) - UTILITY HYDRAULIC SYSTEM PRESSURE (EMERGENCY)

FOR TRAINING ONLY

PLACARDS

THE MARKINGS AND PLACARDS INSTALLED ON THIS HELICOPTER CONTAIN OPERATING LIMITATIONS WHICH MUST BE COMPLIED WITH WHEN OPERATING THIS HELICOPTER. OTHER OPERATING LIMITATIONS WHICH MUST BE COMPLIED WITH WHEN OPERATING THIS HELICOPTER ARE CONTAINED IN THE R.A.I. APPROVED RFM

In clear view of the pilot

AIRSPEED LIMITATIONS V_{NE} – KIAS

Hp–ft / OAT°C	–1000 TO SL	3000	6000	9000	12000	15000	18000	20000
45	168	165	–	–	–	–	–	–
35	168	168	158	–	–	–	–	–
25	168	168	161	152	143	–	–	–
15	168	168	164	155	146	136	111	–
5	168	168	167	157	148	139	114	97
–5	168	168	168	160	151	142	117	100
–15	168	168	168	164	154	145	120	103
–25	168	168	168	167	157	148	123	106

AUTOROTATION OR OEI:
REDUCE V_{NE} BY 40 KIAS

MAX FWD TOUCHDOWN SPEED: 40 Kts
V_{LO} AND V_{LE} : 120 KIAS

ABHD455C

In clear view of the pilot

FOR TRAINING ONLY

IN ALTN POSITION
CLOSE VENTS AND
TURN HEATER/ECS OFF

In clear view of the pilot

IN ALTN POSN
MAINTAIN INST
ACCURACY BY
CLOSING
WINDOWS VENTS
AND TURNING
HEATER OFF

In clear view of the pilot, only with sliding windows
P/N 109-0822-68 installed

ALT. STATIC
DECREASE ALTIMETER READINGS BY 300 ft

In clear view of the pilot

MAXIMUM LOAD 150 KG (330 LB)
MAX UNIT LOAD 500 KG/M^2 (102 LB/SQ.FT.)

Baggage compartment

FOR TRAINING ONLY

FOR TRAINING ONLY

Add new decal.

Reduce all Vne (Power on)
by 28 KIAS optional
equipment included

On central frame of cockpit above Vne placard.

FOR TRAINING ONLY

MAXIMUM ALLOWABLE BAGGAGE LOAD					
ZONE	1	2	3	4	5
KG	150	140	132	123	108
MAX UNIT FLOOR LOADING 500 KG/M^2 (102 LB/SQ.FT.)					

Baggage compartment

ALL CARGO MUST BE SECURED
MAX LOAD PER TIE DOWN RING 91 KG (200 LB)

Baggage compartment

FOR TRAINING ONLY

FOR TRAINING ONLY