SECTION 9

SUPPLEMENTAL PERFORMANCE INFORMATION

TABLE OF CONTENTS

	Page
GENERAL INFORMATION	9–1
HELICOPTER CONFIGURATION	9–1
CRUISE CHARTS	9–1
HOVERING CEILING - ONE ENGINE INOPERATIVE	9–20

LIST OF ILLUSTRATIONS

	Page
Figure 9-1. Cruise.	9–2
Figure 9-2. Cruise.	9–3
Figure 9-3. Cruise.	9–4
Figure 9-4. Cruise.	9–5
Figure 9-5. Cruise.	9–6
Figure 9-6. Cruise.	9–7
Figure 9-7. Cruise.	9–8
Figure 9-8. Cruise.	9–9
Figure 9-9. Cruise.	9–10
Figure 9-10. Cruise.	9–11
Figure 9-11. Cruise.	9–12
Figure 9-12. Cruise.	9–13
Figure 9-13. Cruise.	9–14
Figure 9-14. Cruise.	9–15
Figure 9-15. Cruise.	9–16
Figure 9-16. Cruise.	9–17
Figure 9-17. Cruise.	9–18
Figure 9-18. Cruise.	9–19
Figure 9-19. Hovering ceiling - IGE - OEI - 2.5 minutes power.	9–21
Figure 9-20. Hovering ceiling - OGE - OEI - 2.5 minutes power.	9–22

FOR TRAINING ONLY

FOR TRAINING ONLY

SECTION 9

SUPPLEMENTAL PERFORMANCE INFORMATION

GENERAL INFORMATION

The Supplemental Performance Information contained in this section is provided for use in conjunction with Section 4 and optional equipment Appendices, as applicable.
This section contains useful charts of cruise to determine max endurance and cruise recommended and hovering ceiling-single engine charts.

HELICOPTER CONFIGURATION

Standard configuration with engine air intakes.

CRUISE CHARTS

The cruise charts are based on estimates and limited flight test data. Fuel consumption may vary between engines. It is recommended that the operator conduct measurements to be used to adjust the presented data as required. These data do not include the effects of bleed air on fuel consumption. Fuel flow data are applicable to the basic helicopter without any optional equipment which would appreciably affect lift, drag, or power available.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 0 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -5˚C

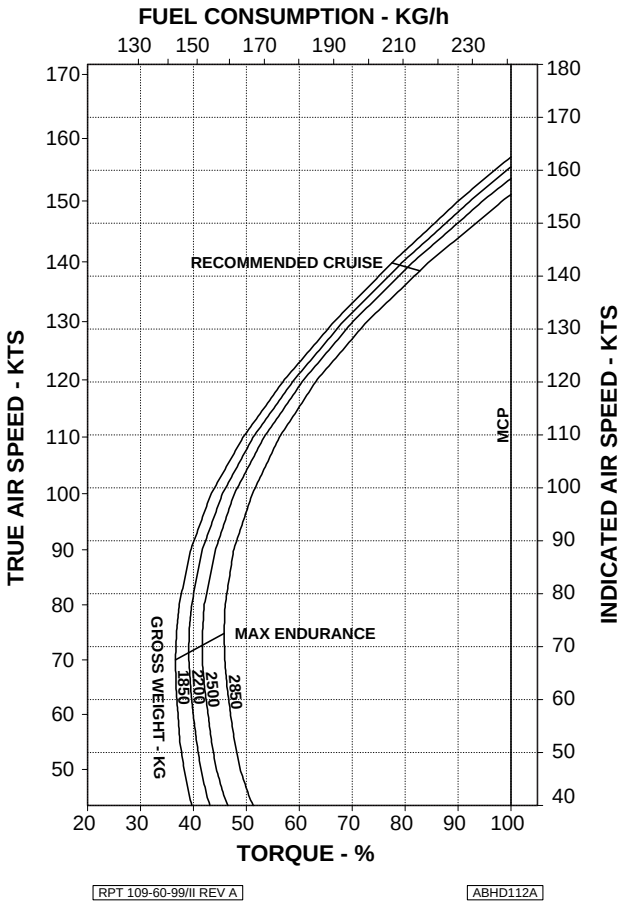

Figure 9-1. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 0 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 15°C

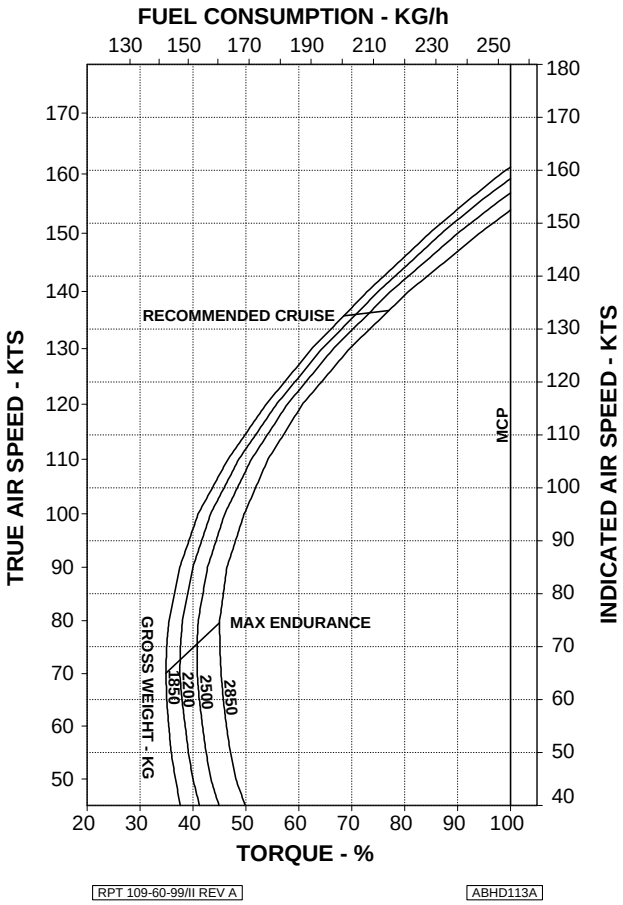

Figure 9-2. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 0 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 35°C

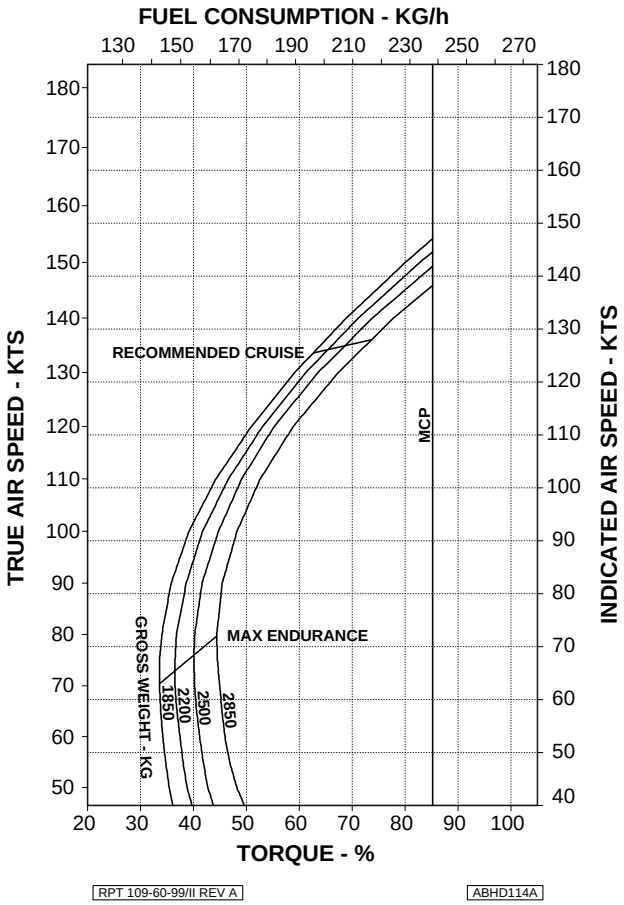

Figure 9-3. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 2000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -9˚C

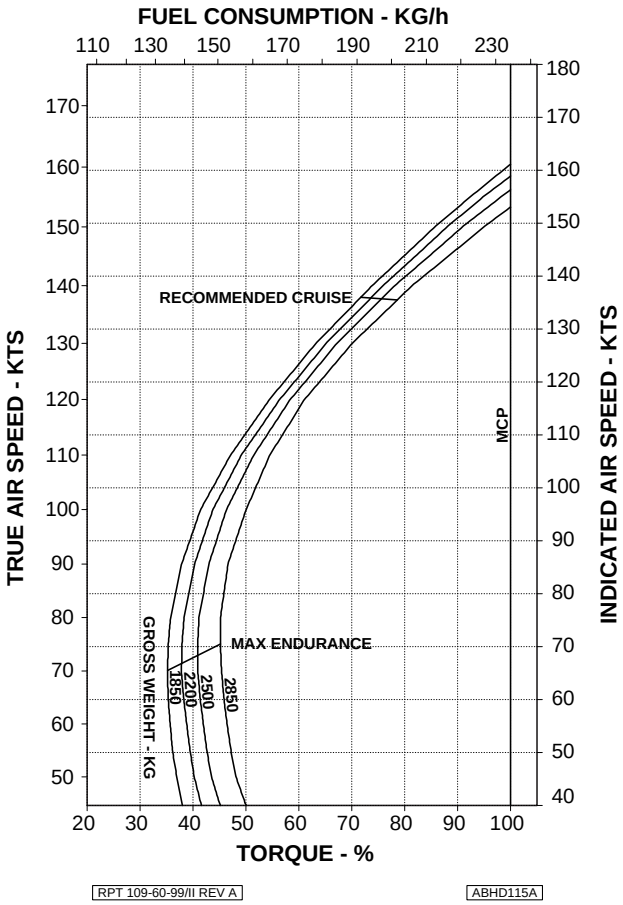

Figure 9-4. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 2000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 11°C

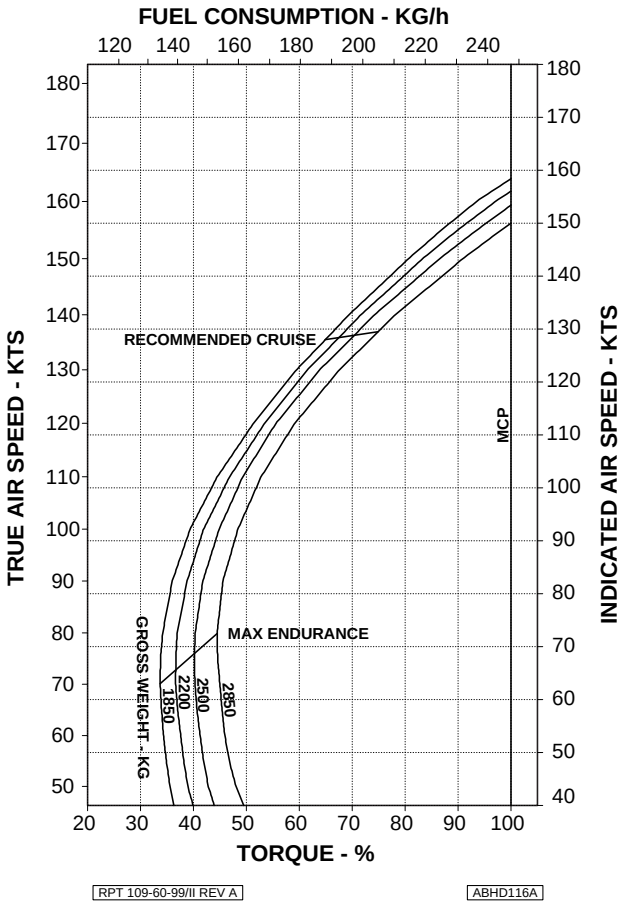

Figure 9-5. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 2000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 31°C

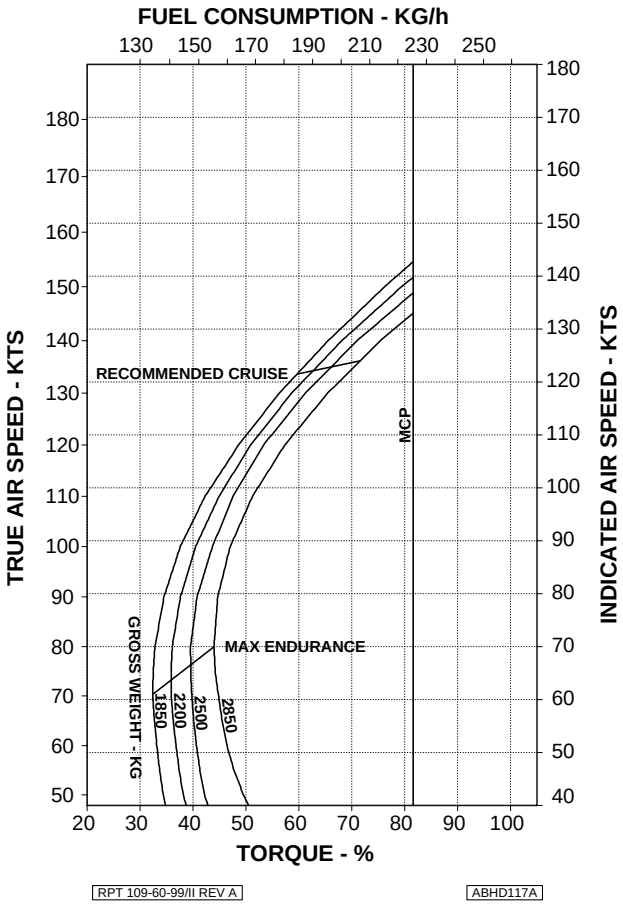

Figure 9-6. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 4000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -13°C

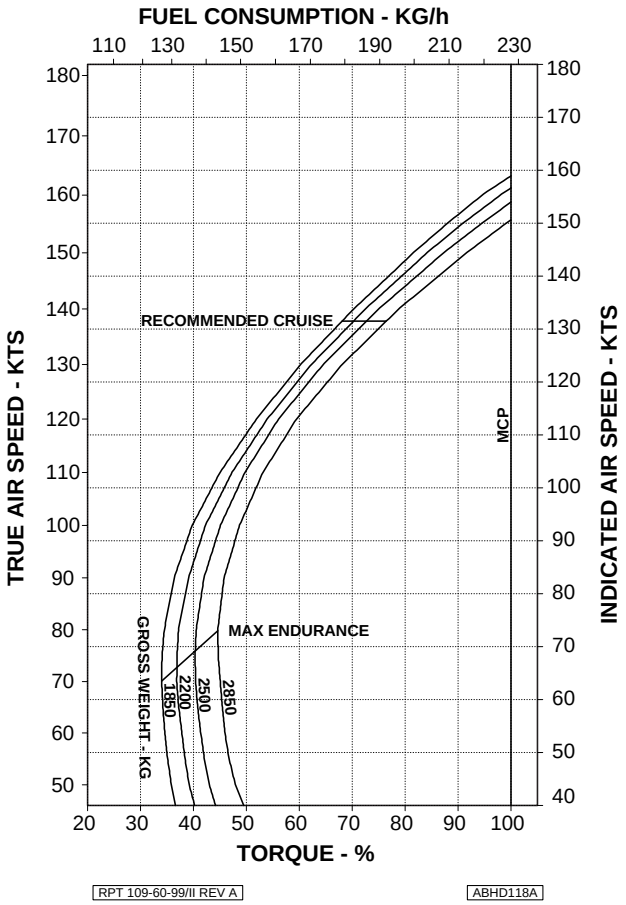

Figure 9-7. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 4000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 7°C

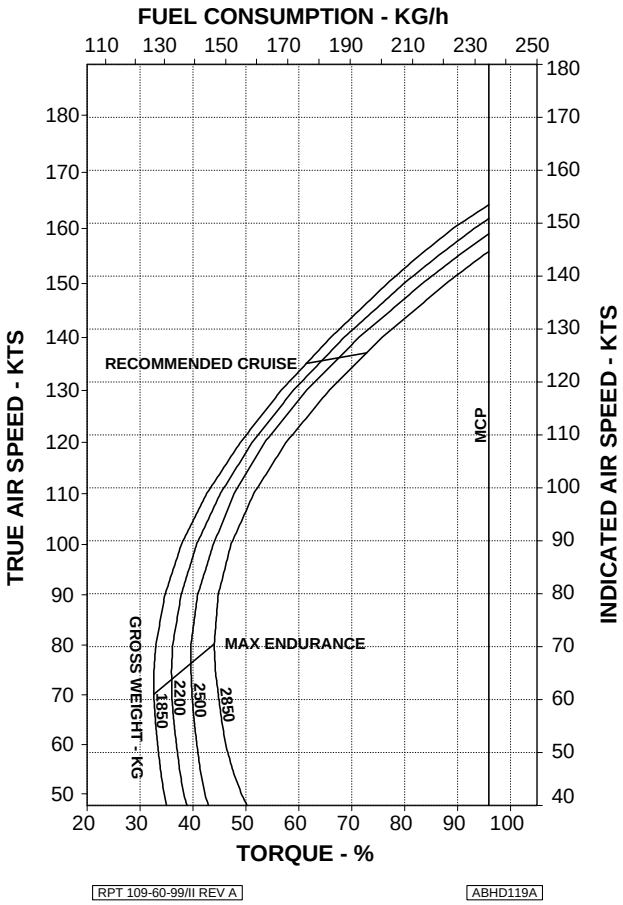

Figure 9-8. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 4000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 27°C

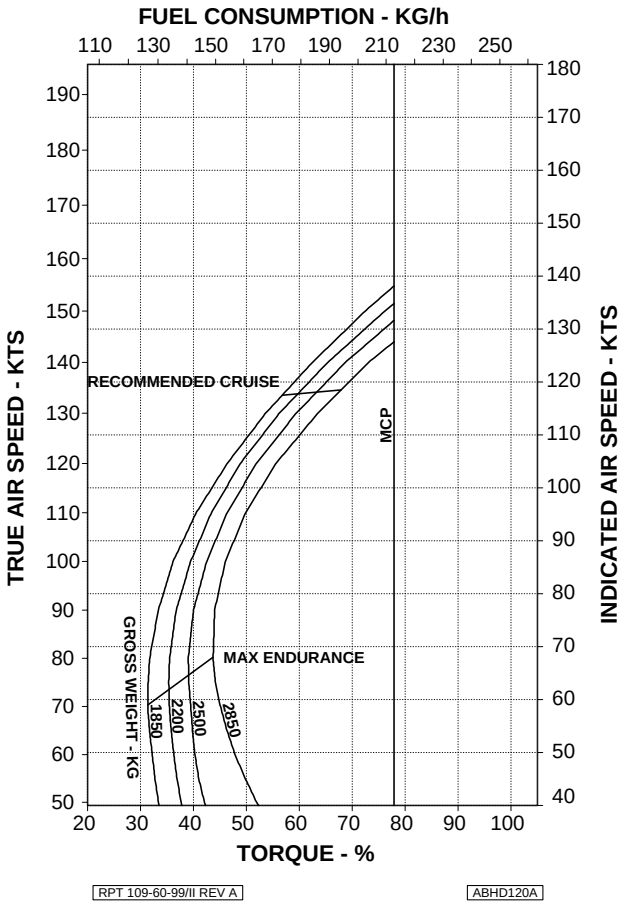

Figure 9-9. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 6000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -17°C

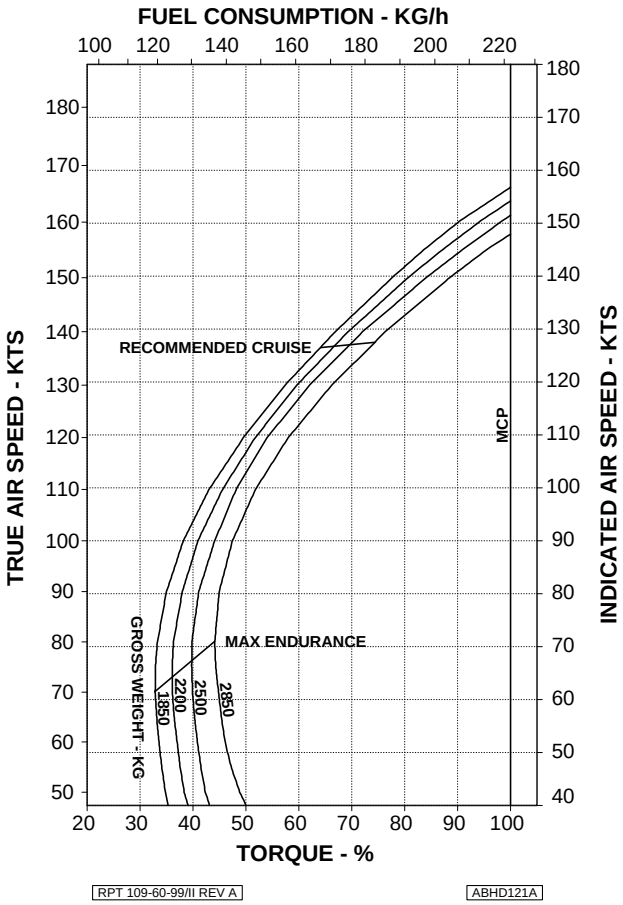

Figure 9-10. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 6000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 3°C

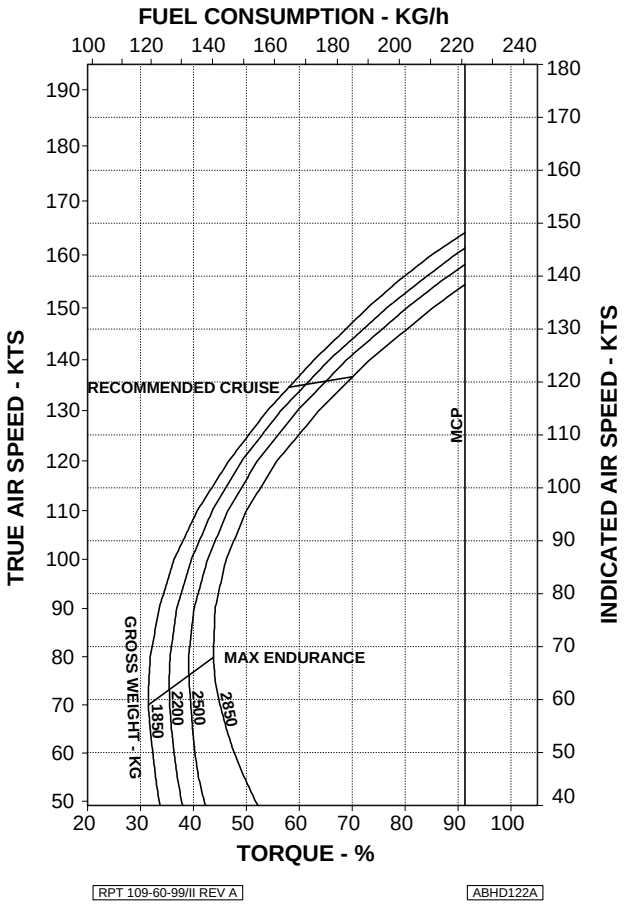

Figure 9-11. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 6000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 23°C

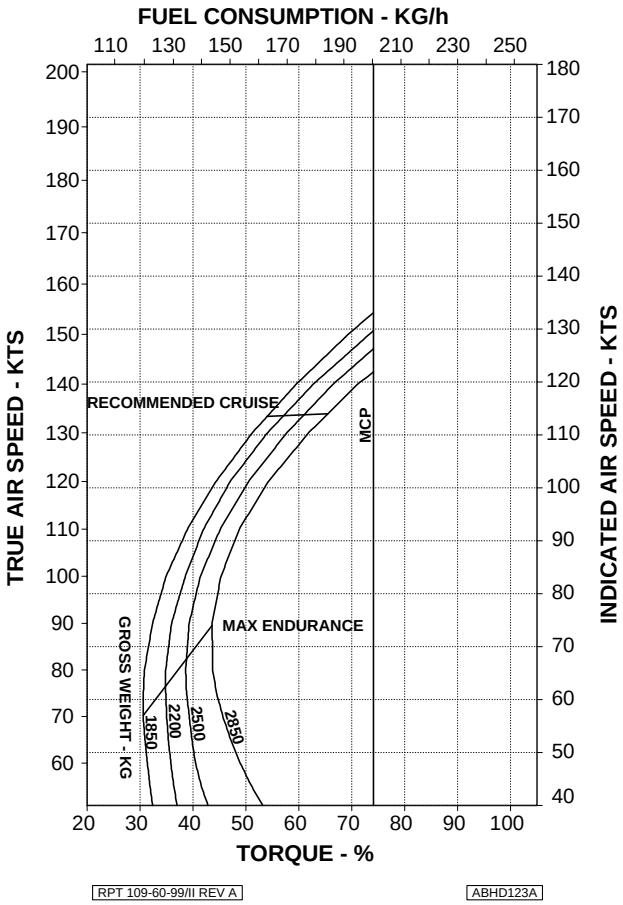

Figure 9-12. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 8000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -21°C

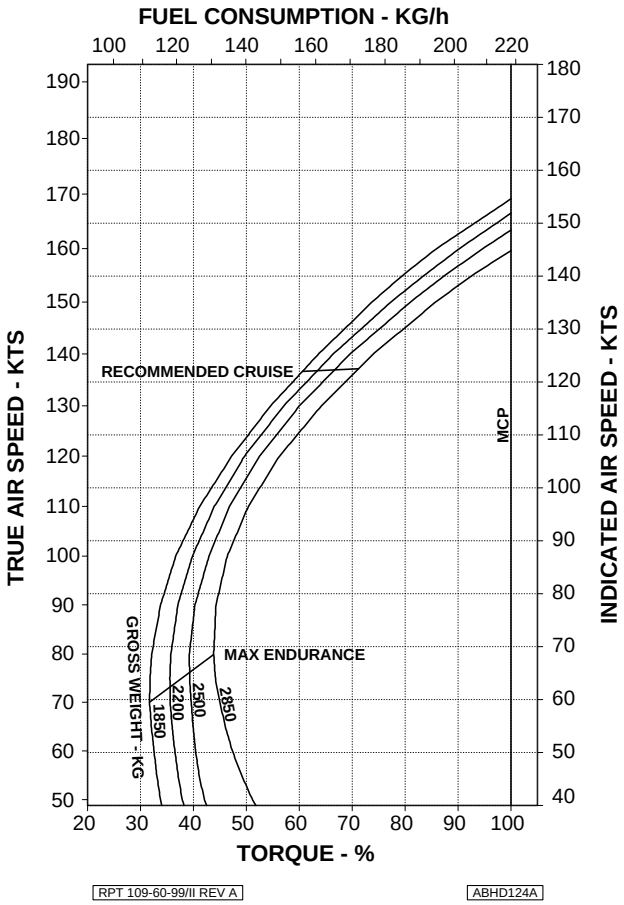

Figure 9-13. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 8000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -1˚C

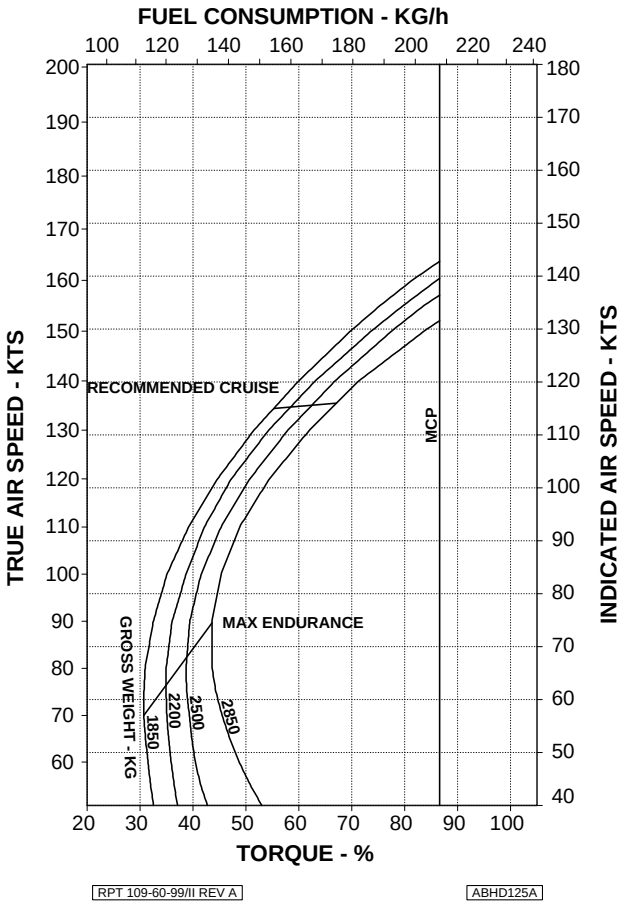

Figure 9-14. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 8000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 19°C

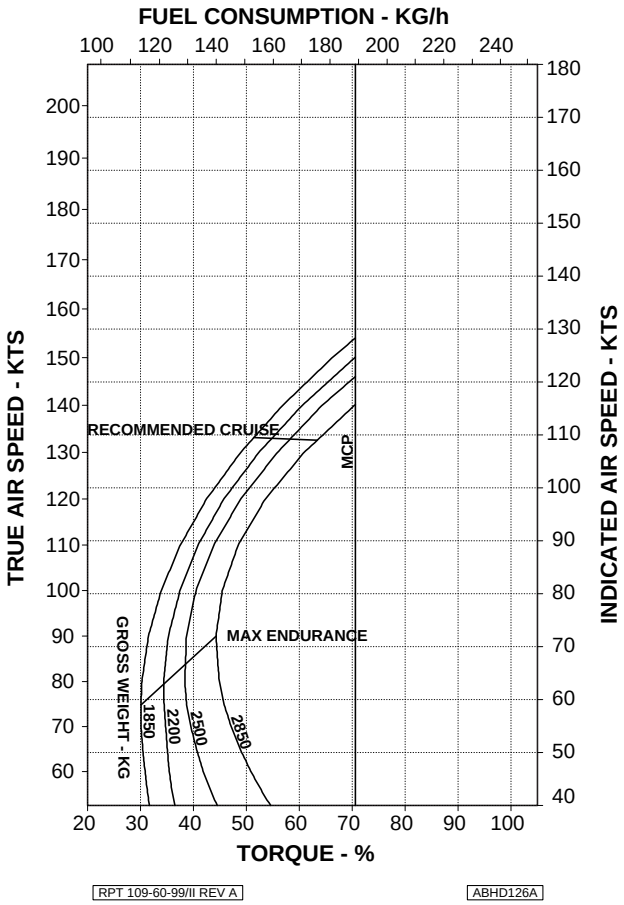

Figure 9-15. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 10000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -25°C

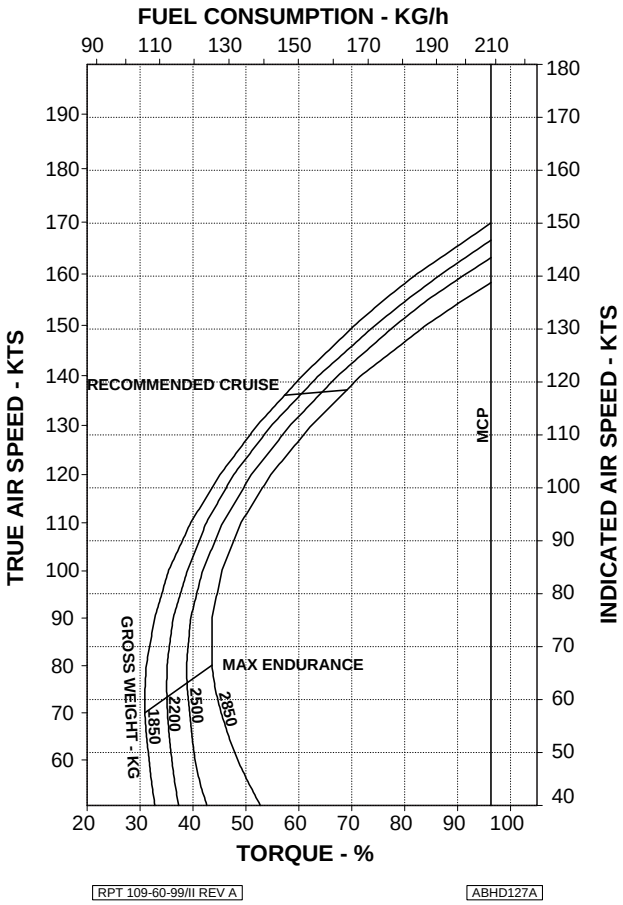

Figure 9-16. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 10000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: -5°C

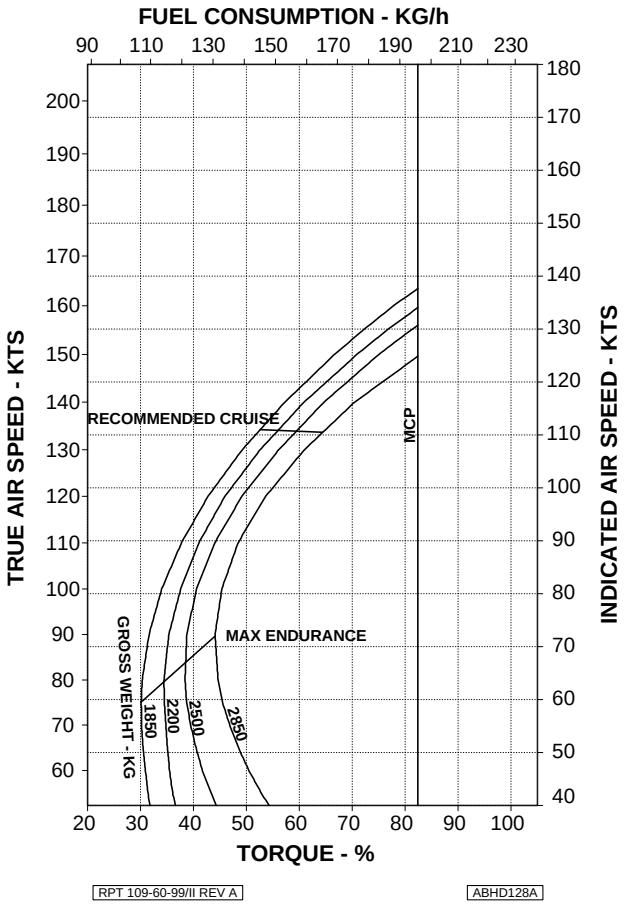

Figure 9-17. Cruise.

FOR TRAINING ONLY

CRUISE

ROTOR: 100 %
CLEAN CONFIGURATION

PRESSURE ALTITUDE: 10000 FT
ELECTRIC LOAD: 150 AMPS TOTAL

OAT: 15°C

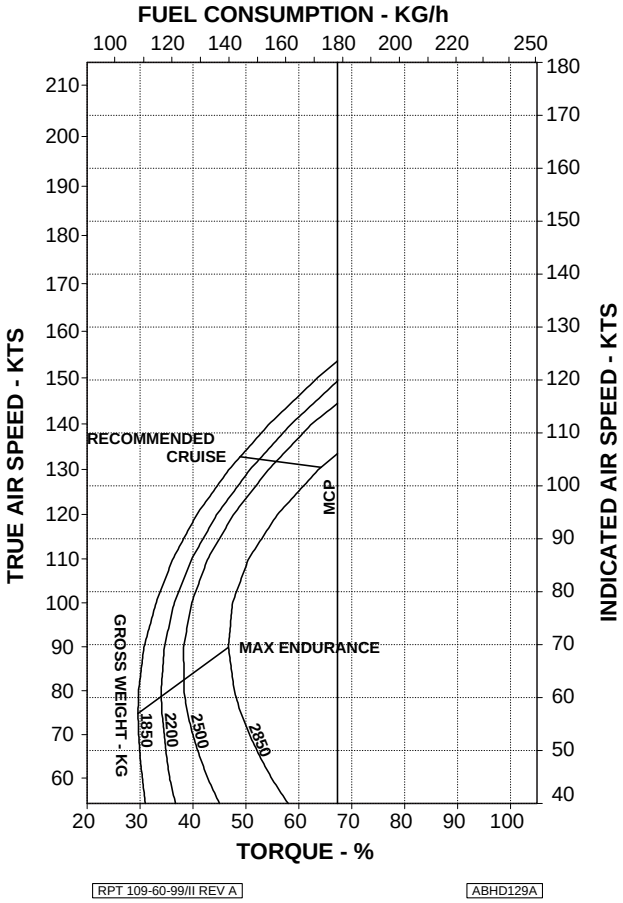

Figure 9-18. Cruise.

FOR TRAINING ONLY

HOVERING CEILING - ONE ENGINE INOPERATIVE

The hovering charts are presented for the OEI (one engine inoperative) 2.5 minutes power rating in ground effect and out of ground effect.
The charts are based on flight test data.

FOR TRAINING ONLY

HOVERING CEILING IN GROUND EFFECT
ONE ENGINE INOPERATIVE - 2.5 MINUTES POWER

ROTOR: 102 % WHEEL HEIGHT: 3 FT
ZERO WIND ELECTRIC LOAD: 150 AMPS TOTAL

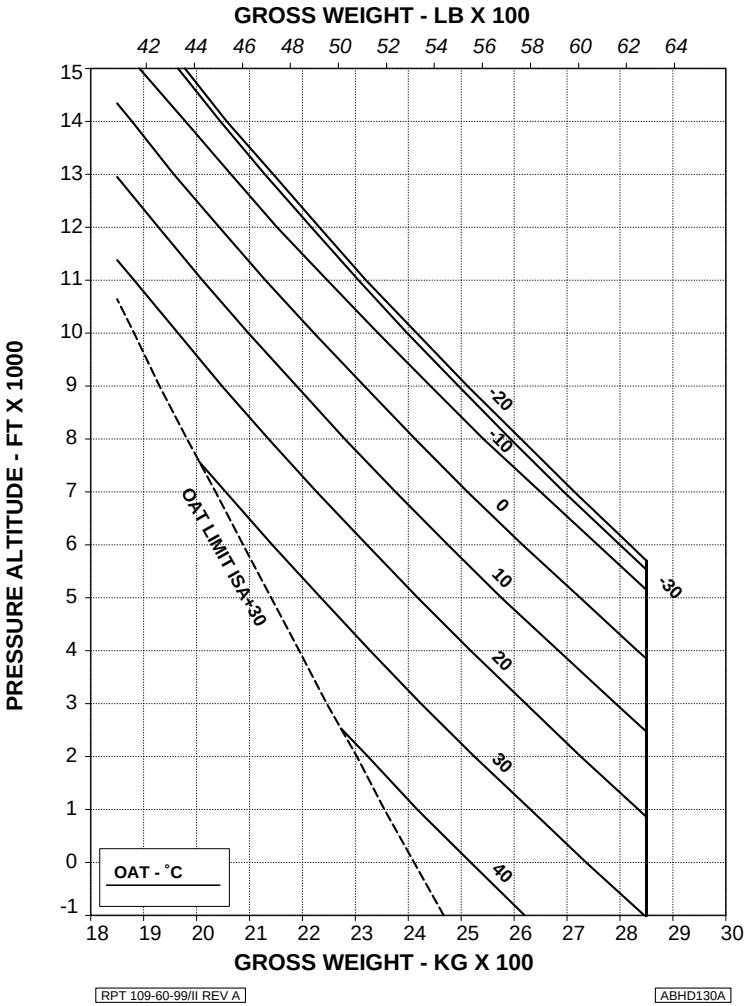

Figure 9-19. Hovering ceiling - IGE - OEI - 2.5 minutes power.

FOR TRAINING ONLY

HOVERING CEILING OUT OF GROUND EFFECT
ONE ENGINE INOPERATIVE - 2.5 MINUTES POWER

ROTOR: 102 % ELECTRIC LOAD: 150 AMPS TOTAL
ZERO WIND

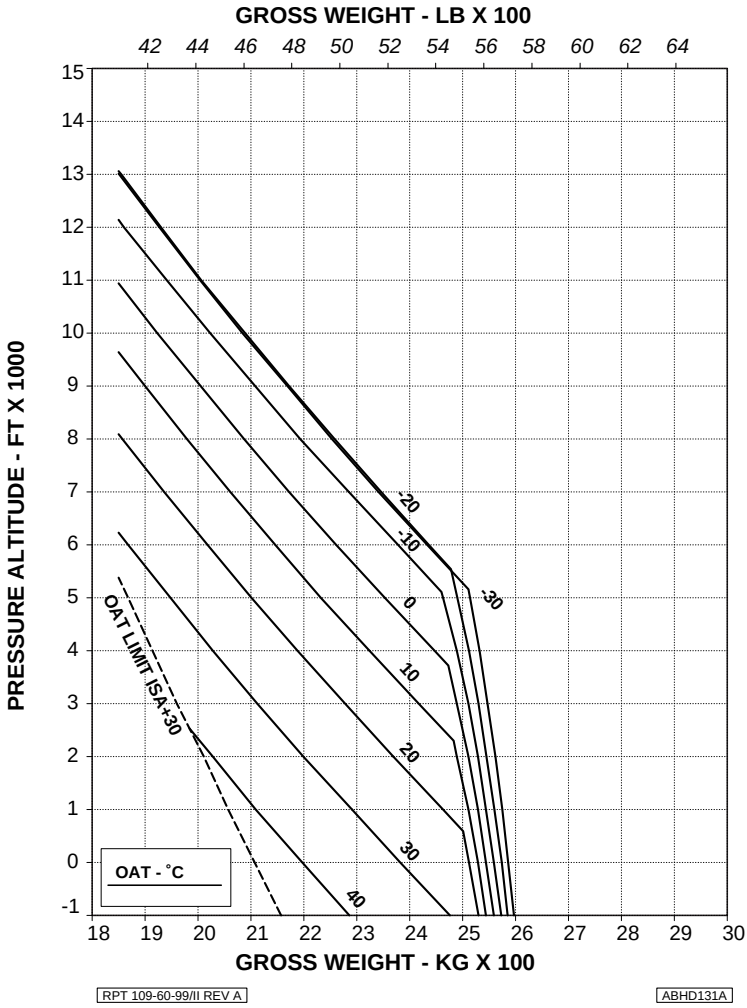

Figure 9-20. Hovering ceiling - OGE - OEI - 2.5 minutes power.

FOR TRAINING ONLY