

6. MASS AND BALANCE

6.1 EQUIPMENT LIST ENTRIES

System/Equipment Designation	Part No.	Mass (kg)	Arm (mm)	Massmoment (kgmm)
Emergency Flotation System	105-81801	65.1	3400	221340
– Installation Provisions	105-81805	0.8	3400	2720
– Detachable Items	105-81808	64.3	3400	218620
Emergency Flotation System	105-81804	71.3	3400	242420
– Installation Provisions	105-81805	0.8	3400	2720
– Detachable Items	105-81807	70.5	3400	239700
Modified Installation Kit	105-81790	negligible		
NOTE The Modified Installation Kit relocates the gas cylinders for better CG mass distribution on certain helicopters.				

7. SYSTEM DESCRIPTION

The emergency flotation system is designed to enable an emergency water landing and keep the helicopter afloat even in rough seas. The system comprises two elongated skid tubes each having two inflatable floats, two stored gas cylinders (filled with compressed air or nitrogen) with a common electrically activated discharge valve, and interconnecting air supply lines.

Each float is divided into compartments to minimize loss of buoyancy in the event of a puncture. The discharge valve is equipped with a pressure gage to show the total cylinder gas charge which should be 3000 psig corrected for ambient air temperature when full. Inflation time is approx seven seconds although the system will float the helicopter at max gross mass after four seconds.


The emergency flotation system is electrically activated from a guarded FLOAT switch on the switch panel. Circuit continuity is checked by pressing the EMERG FLOATS TEST pushbutton switch on the overhead panel with the adjacent indicator light coming on.

8. HANDLING, SERVICING, AND MAINTENANCE


No change in the basic Flight Manual data.

9. OPERATIONAL INFORMATION

Airspeed is reduced by approx 7 KIAS with the floats stowed and by approx 20 KIAS with floats inflated. Climb performance is reduced slightly due to increased drag.

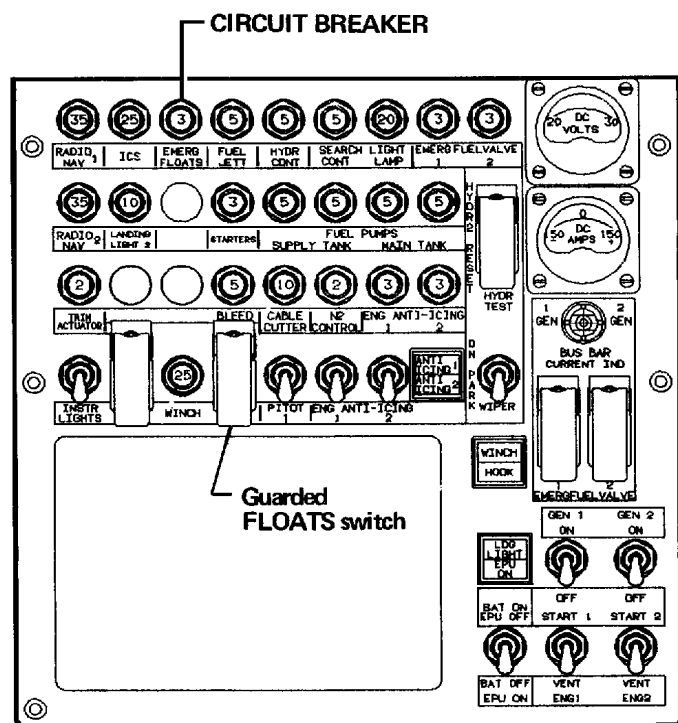

TYPICAL SWITCH PANEL

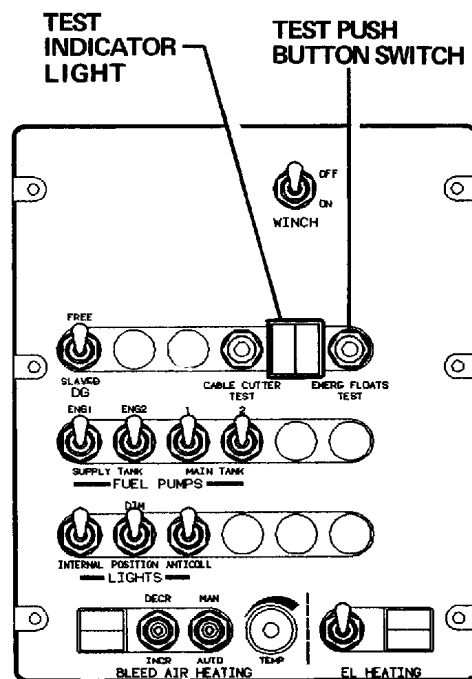

TYPICAL OVERHEAD PANEL

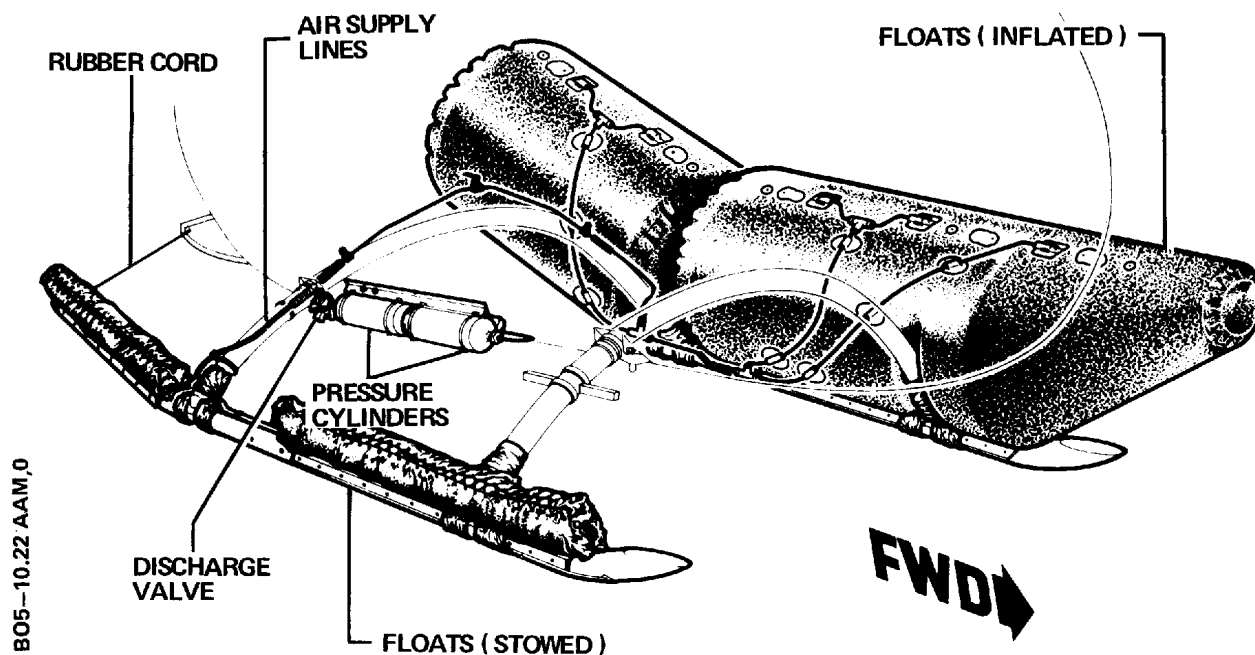


Fig. 1 Emergency Flotation System