

6. MASS AND BALANCE

6.1 EQUIPMENT LIST ENTRIES

System/Equipment Designation	Part No.	Mass (kg)	Arm (mm)	Massmoment (kgmm)
Divided Supply Tank Fuel System	D133-2124	18.9	2900	54810

7. SYSTEM DESCRIPTION

The divided supply tank fuel system provides for a separate fuel supply to each engine minimizing the risk of a dual engine failure. The fuel storage subsystem is modified to include a supply tank internally divided by a partition into two separate, equal halves and an interconnecting line that joins the two main tank fuel pumps.

Each half of the divided supply tank is fitted with a drain valve, a fuel pump, a fuel quantity transmitter and a low fuel warning switch. A triple fuel quantity indicator is provided for simultaneous indications of both supply tank halves (S I and S II) and the main tank (M).

The low fuel warning switches are connected in parallel so that activation of either switch will cause the **LOW FUEL** warning light to come on.

The main tank pumps are interconnected so that both supply tank halves will continue to receive main tank fuel should one main tank pump fail. Check valves mounted downstream of each pump in the interconnecting line prevent fuel from flowing back through a failed pump.

NOTE Should one engine fail, the fuel quantity (up to 37 kg or 81.6 lb) remaining in that engine's supply tank half must be considered as unusable.

BO5-10.31 AAM.0

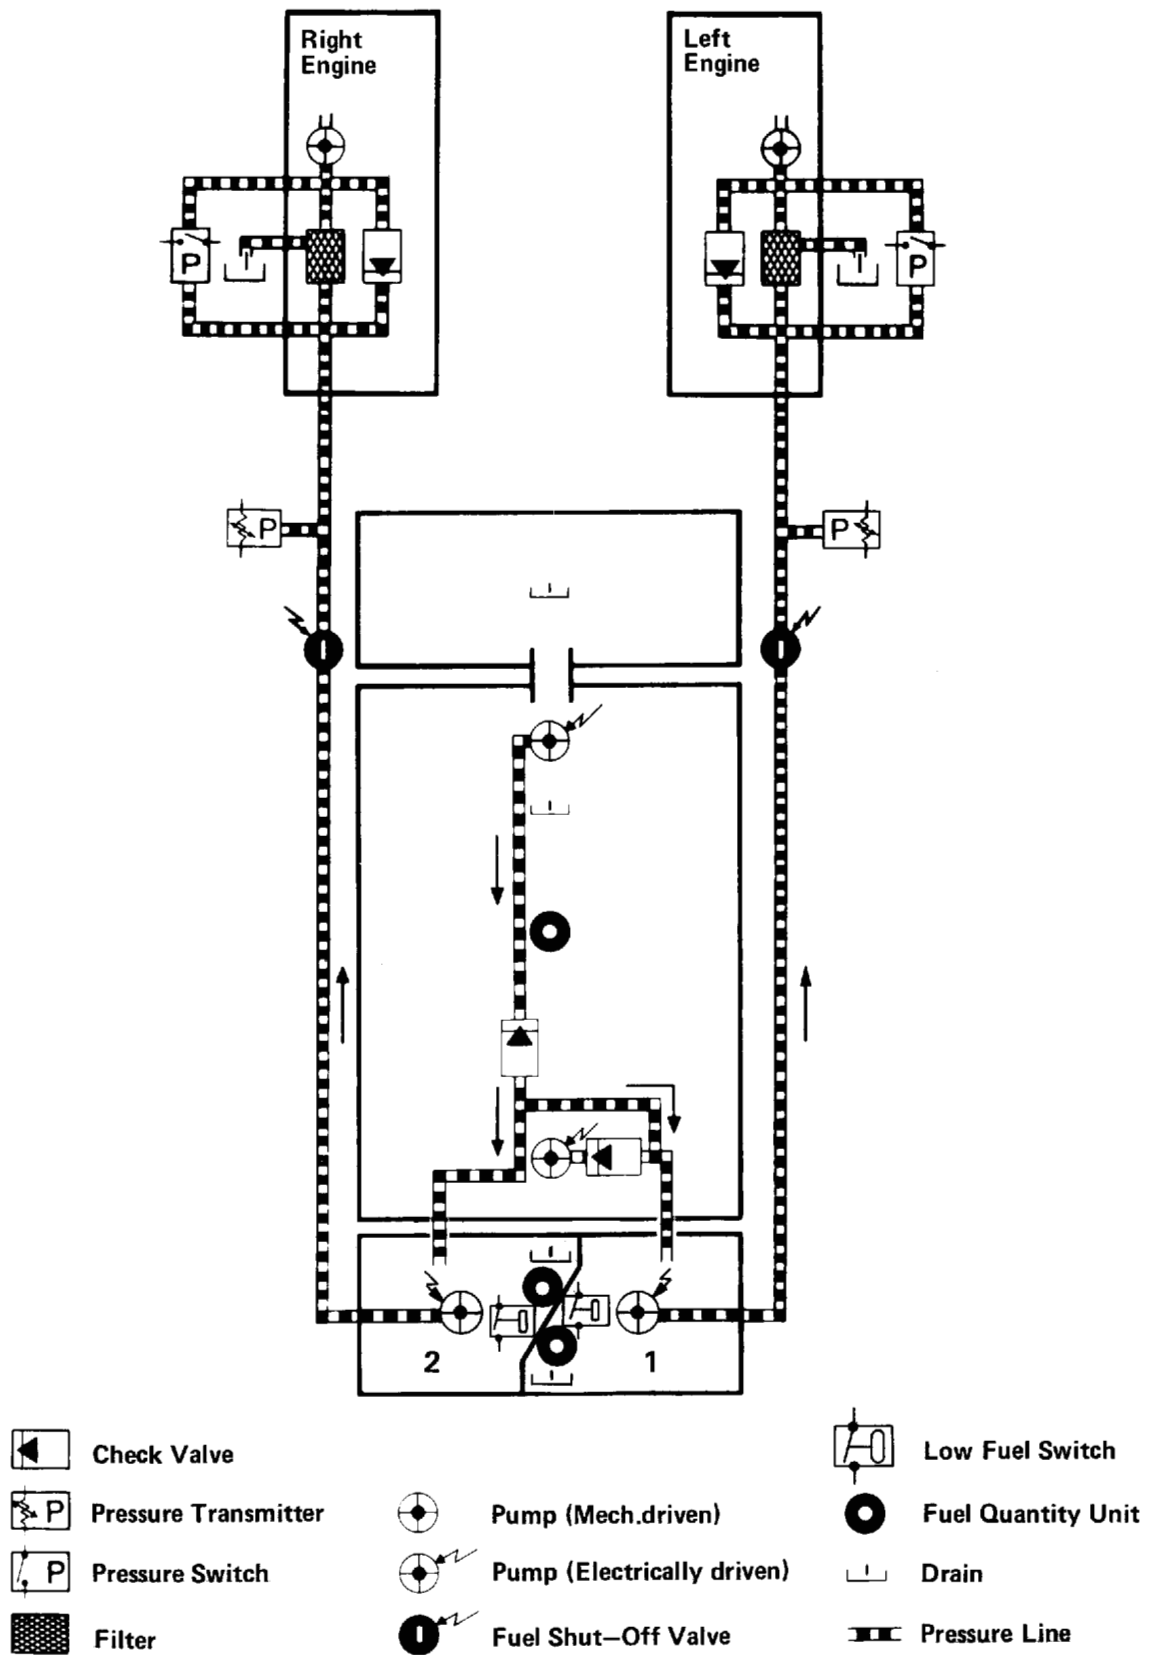


Fig. 1 Divided Supply Tank Fuel System Schematic