

2.8.2 Sideward Flight

Sideward flight or crosswind hover has been demonstrated up to 25 kt airspeed.

EFFECTIVITY *Variants CB-4, CDN-B-4, CBS-4, and CDN-BS-4 when GM is between 2400 and 2500 kg*

Sideward flight or crosswind hover has been demonstrated up to 17 kt airspeed.

Engine anti-icing (and bleed air heating, if installed) must be switched off.

EFFECTIVITY ALL

2.8.3 Rearward Flight

Rearward flight or tailwind hover has been demonstrated up to 20 kt airspeed.

EFFECTIVITY *Variants CB-4, CDN-B-4, CBS-4, and CDN-BS-4 when GM is between 2400 and 2500 kg*

Rearward flight or tailwind hover has been demonstrated up to 17 kt airspeed.

Engine anti-icing (and bleed air heating, if installed) must be switched off.

EFFECTIVITY ALL

2.9 ALTITUDE LIMITATIONS (see Fig. 2-3)

NOTE Altitude values used throughout this manual are Pressure Altitude unless stated otherwise.


Maximum altitude:

- when operating on MIL-T-5624, grade JP-5
or ASTM D-1655 Jet A and Jet A1 17,000 ft
- when operating on MIL-T-5624, grade JP-4;
MIL-T-83133, grade JP-8; ASTM D-1655 Jet B;
or alternate fuel (AVGAS/Jet fuel mixture) 13,700 ft

EFFECTIVITY *Variants CB-4, CDN-B-4, CBS-4, and CDN-BS-4 when GM is between 2400 and 2500 kg*

Maximum altitude 10,000 ft

EFFECTIVITY ALL

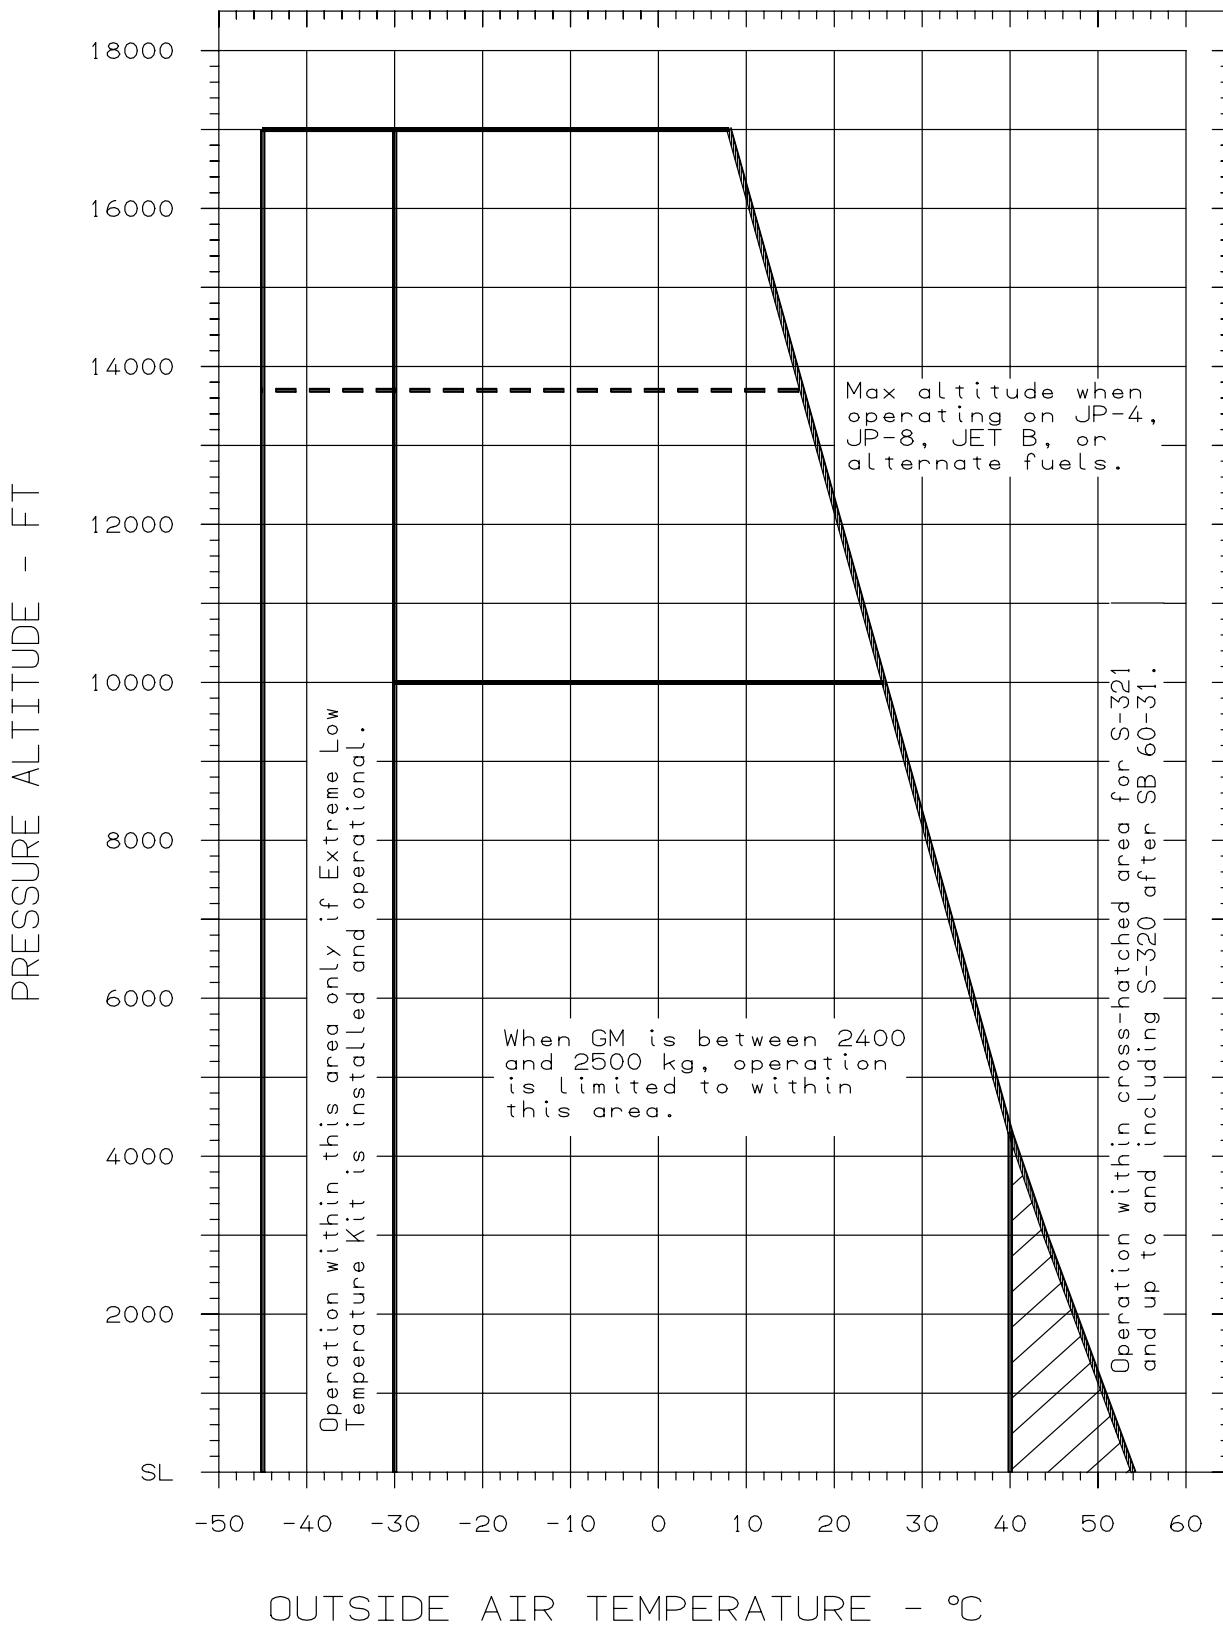

BO5-2BEM, 0

Fig. 2-3 Altitude/Temperature Limit Diagram