

2. LIMITATIONS

2.1 GROSS MASS LIMITS

EFFECTIVITY Variants CB, CB-2 and CDN-B

No change in the basic Flight Manual data.

EFFECTIVITY Variants CB-4 and CDN-B-4

Max gross mass 2400 kg

EFFECTIVITY ALL

2.2 CENTER OF GRAVITY LIMITS

The longitudinal CG limits are as shown on the CG diagram (see Fig. 1).

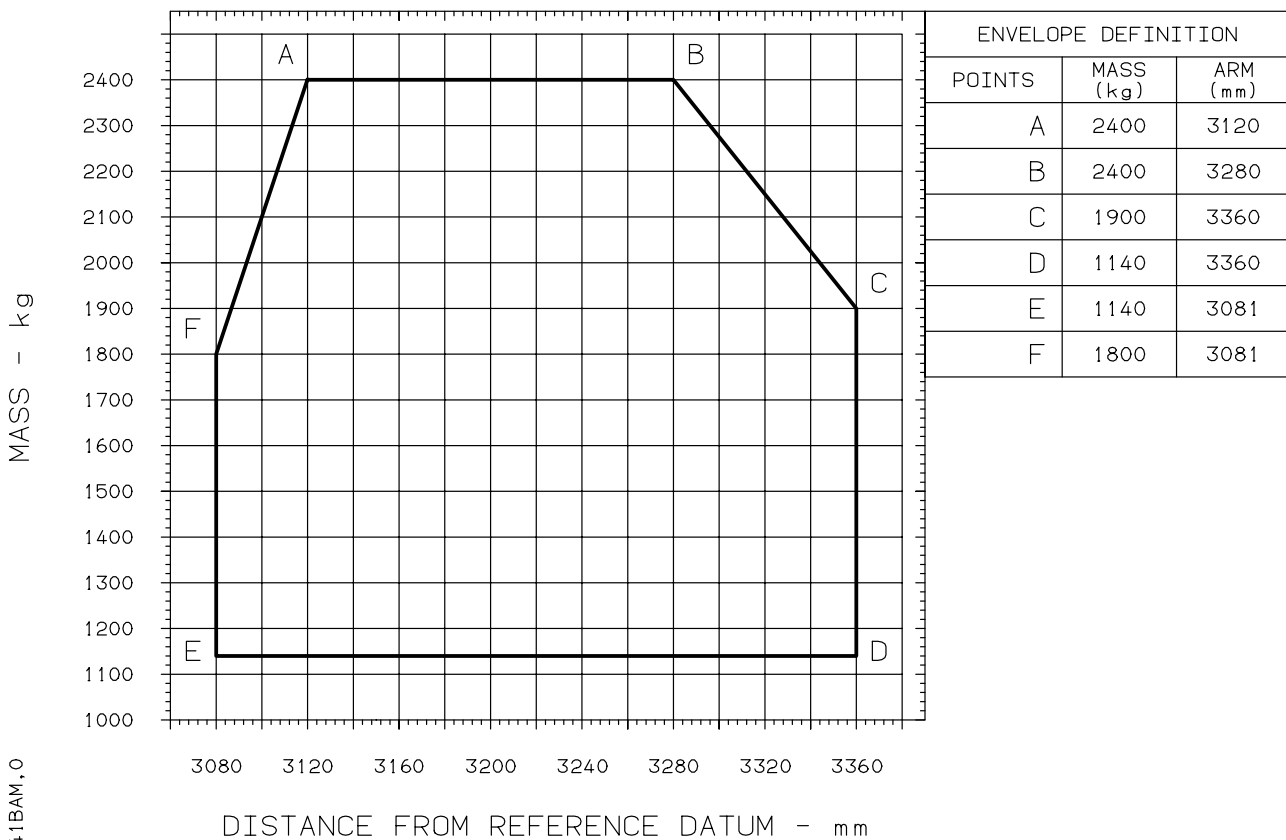


Fig. 1 Longitudinal Center of Gravity Limits

2.3 ALTITUDE LIMITS

Gross mass up to 2300 kg:

Max altitude 17,000 ft

LBA APPROVED

Rev. 0

Gross mass between 2300 and 2400 kg:

Max altitude 10,000 ft

2.4 AIRSPEED LIMITS

IFR Hands-on and VFR/IFR Hands-off (except during takeoff/landing)

 Min speed (V_{MIN}) 45 KIAS

 Max permissible speed (V_{MAX}) under VFR/IFR conditions:

VFR Hands-on	V_{NE}
IFR Hands-on	$V_{NE} - 15 \text{ kt}$
VFR/IFR Hands-off	$V_{NE} - 40 \text{ kt} + \frac{\text{Altitude (ft)}}{1000}$

2.5 ROTOR RPM (N_{RO}) LIMITS

Permissible rotor RPM ranges under the following operating conditions are:

Hands-on	98 to 102 % (recommended: 100 %)
Hands-off	100 to 102 %

2.6 SYSTEM LIMITS

Hands-off operation is permissible only in attitude hold (ATT) mode with HP 1, HP 2 and YAW engaged.

2.7 PLACARDS AND DECALS

Text:

SAS SPERRY HELIPILOT	MAX ALT UP TO 2300 KG = 17000 FT; ABOVE 2300 UP TO 2400 KG = 10000 FT		
	VFR-HANDS-ON	IFR-HANDS-ON	VFR/IFR-HANDS-OFF
V_{MAX}	V_{NE}	$V_{NE} - 15 \text{ KT}$	$V_{NE} - 40 \text{ KT} + \frac{\text{ALT (FT)}}{1000}$
V_{MIN}	_____	45 KT	45 KT
n_{RO}	98 - 102 %	98 - 102 %	100 - 102 %
NOTE HANDS-OFF-OPERATION ONLY IN ATTITUDE HOLD WITH HP1, HP2 AND YAW ENGAGED			

Location: Cockpit interior, in pilot's field-of-view