

2.3 PLACARDS AND DECALS

Text:

**HIGH
LDG.
GEAR**

Location: Cyclic stick lock, in pilot's field-of-view

Text:

**MAX. LOAD FOR
EACH ATTACHING POINT
750 N (165 LB)**

Location: Fuselage exterior, adjacent LH forward mount

3. EMERGENCY AND MALFUNCTION PROCEDURES

No change in the basic Flight Manual data.

4. NORMAL PROCEDURES

No change in the basic Flight Manual data.

5. PERFORMANCE DATA

The Hover Ceiling IGE performance is presented on the following charts (see Fig.1 thru 3).

NOTE Figures 1 and 2 apply for GM up to 2400 kg, while Figure 3 applies for GM between 2400 and 2500 kg.

HOVER CEILING IN GROUND EFFECT

ALLISON 250-C20B

AEO – TAKEOFF POWER (810 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

OEI – EMERGENCY POWER (810 °C TOT, 95% TORQUE)

BLEED AIR CONSUMERS – OFF

NOTE With anti-icing ON reduce derived Gross Mass by 120 kg.

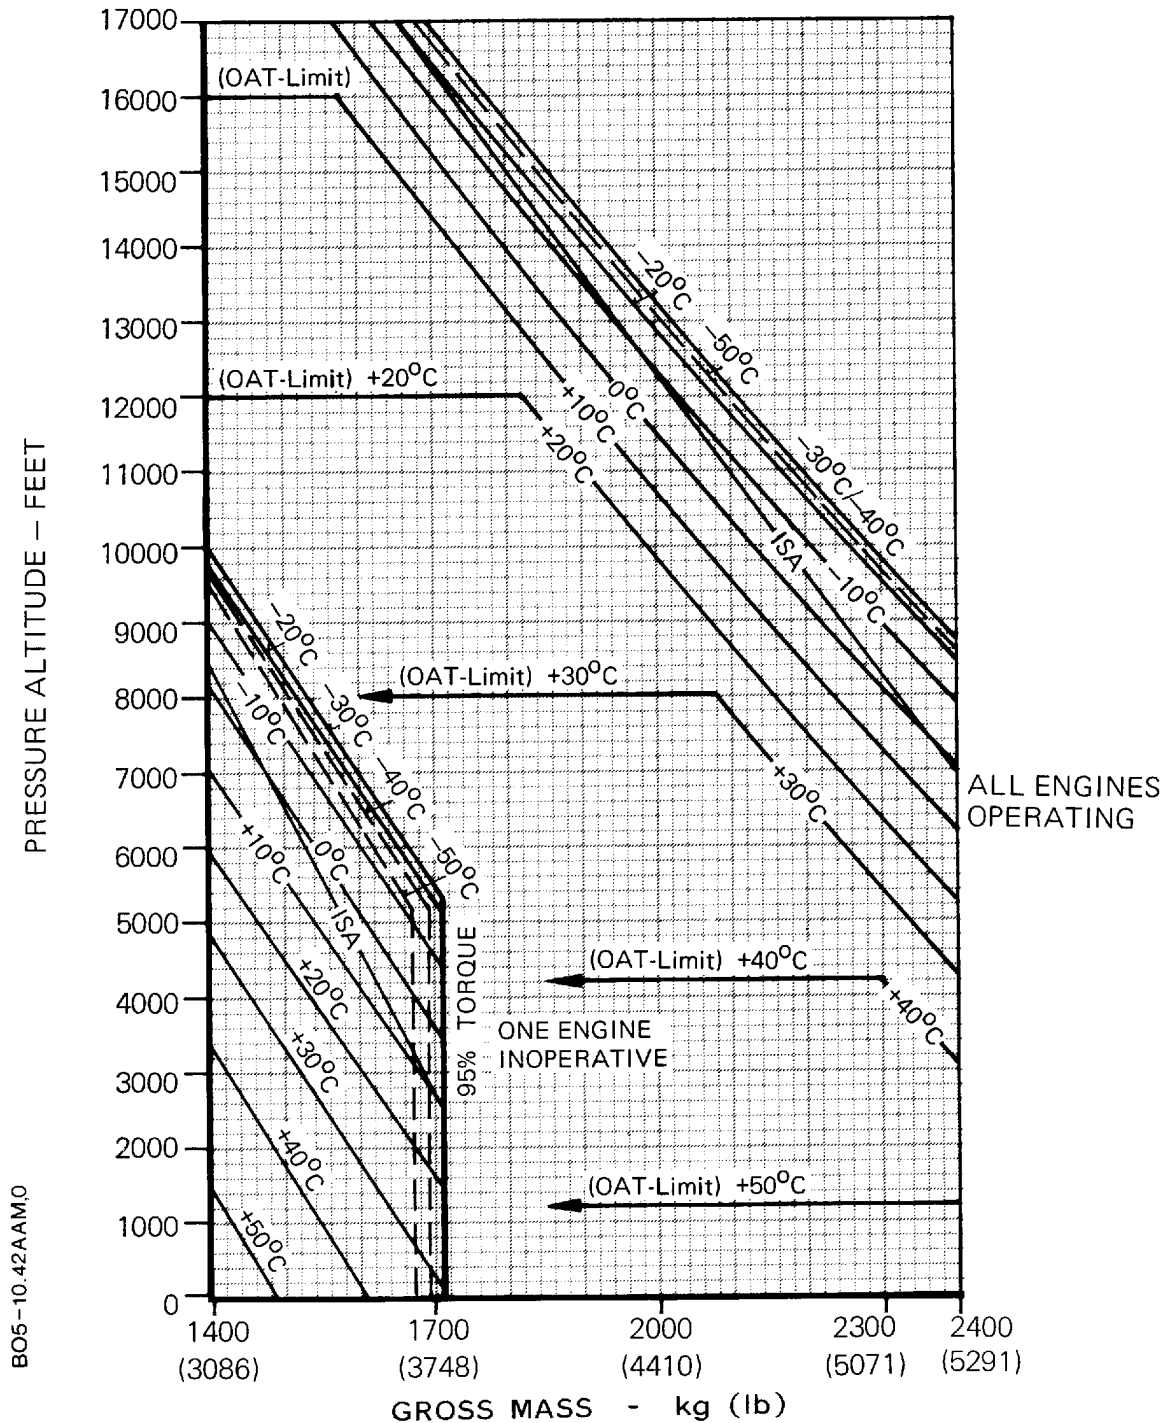


Fig. 1 Hover Ceiling I G E - TOP/EPWR

HOVER CEILING IN GROUND EFFECT

ALLISON 250-C20B

AEO – MAX CONTINUOUS POWER (779 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

OEI – MAX CONTINUOUS POWER (779 °C TOT, 95% TORQUE)

BLEED AIR CONSUMERS – OFF

NOTE With anti-icing ON reduce derived Gross Mass by 120 kg.

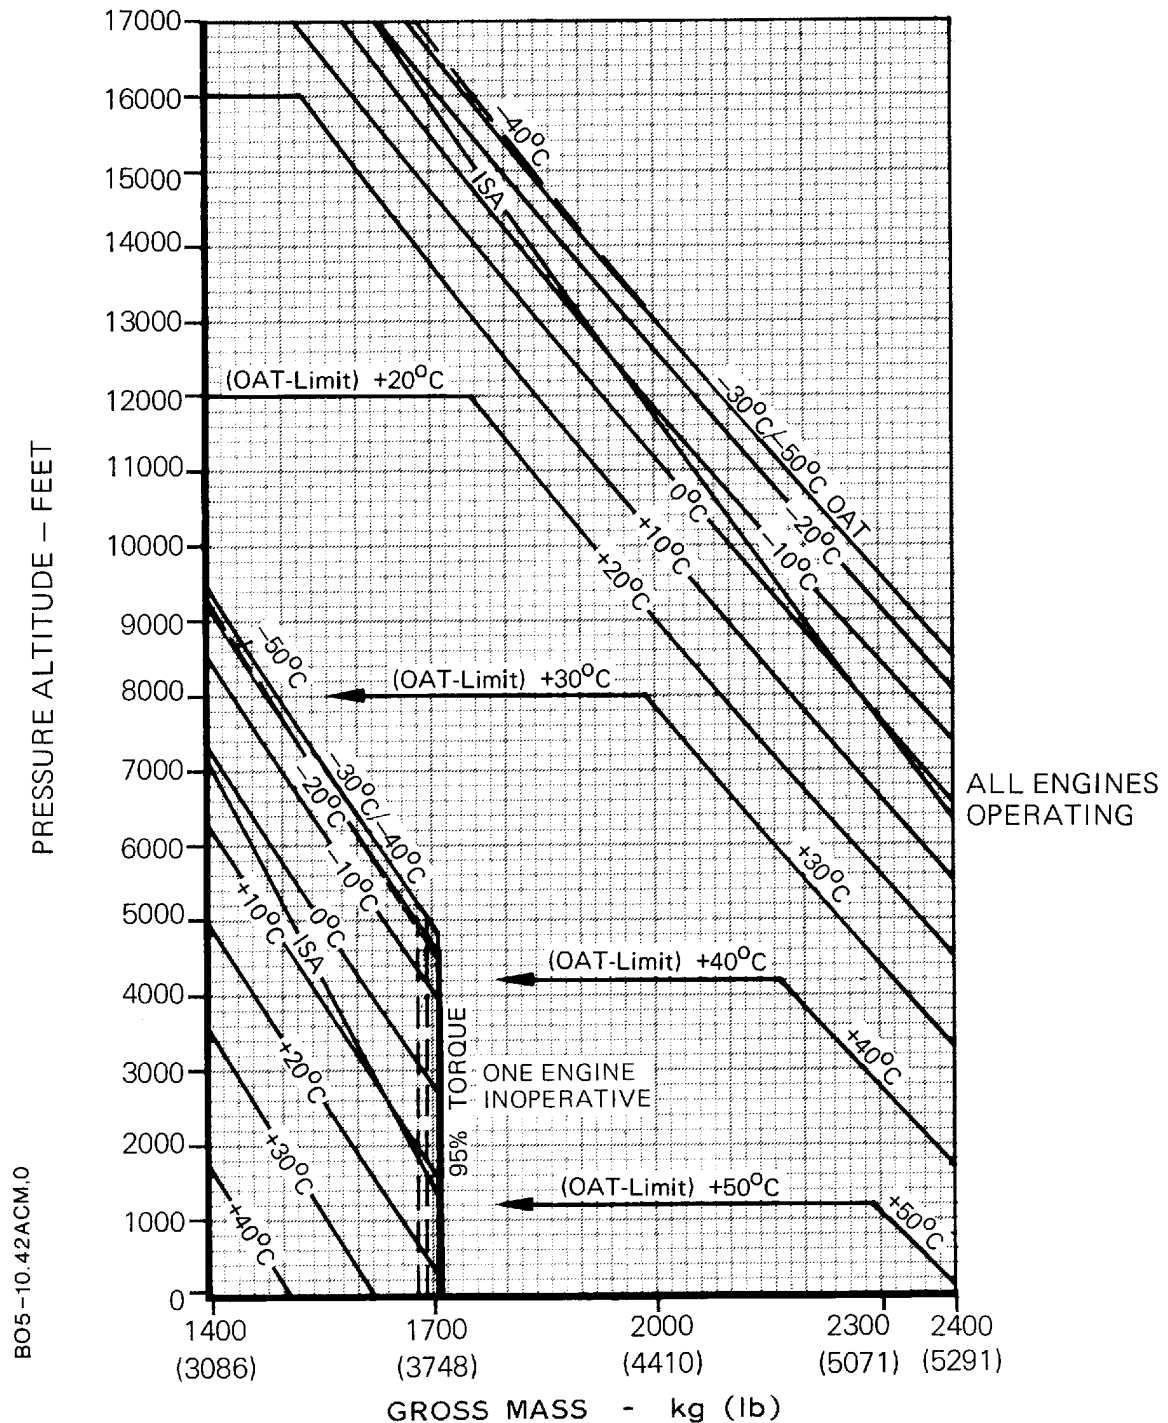


Fig. 2 Hover Ceiling I G E - MCP/MCP

EFFECTIVITY Variants CB-4 and CDN-B-4

HOVER CEILING IN GROUND EFFECT

GROSS MASS 2400-2500 KG

2 X ALLISON 250-C20B

AEO – TAKEOFF POWER (810 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

BLEED AIR CONSUMERS – OFF

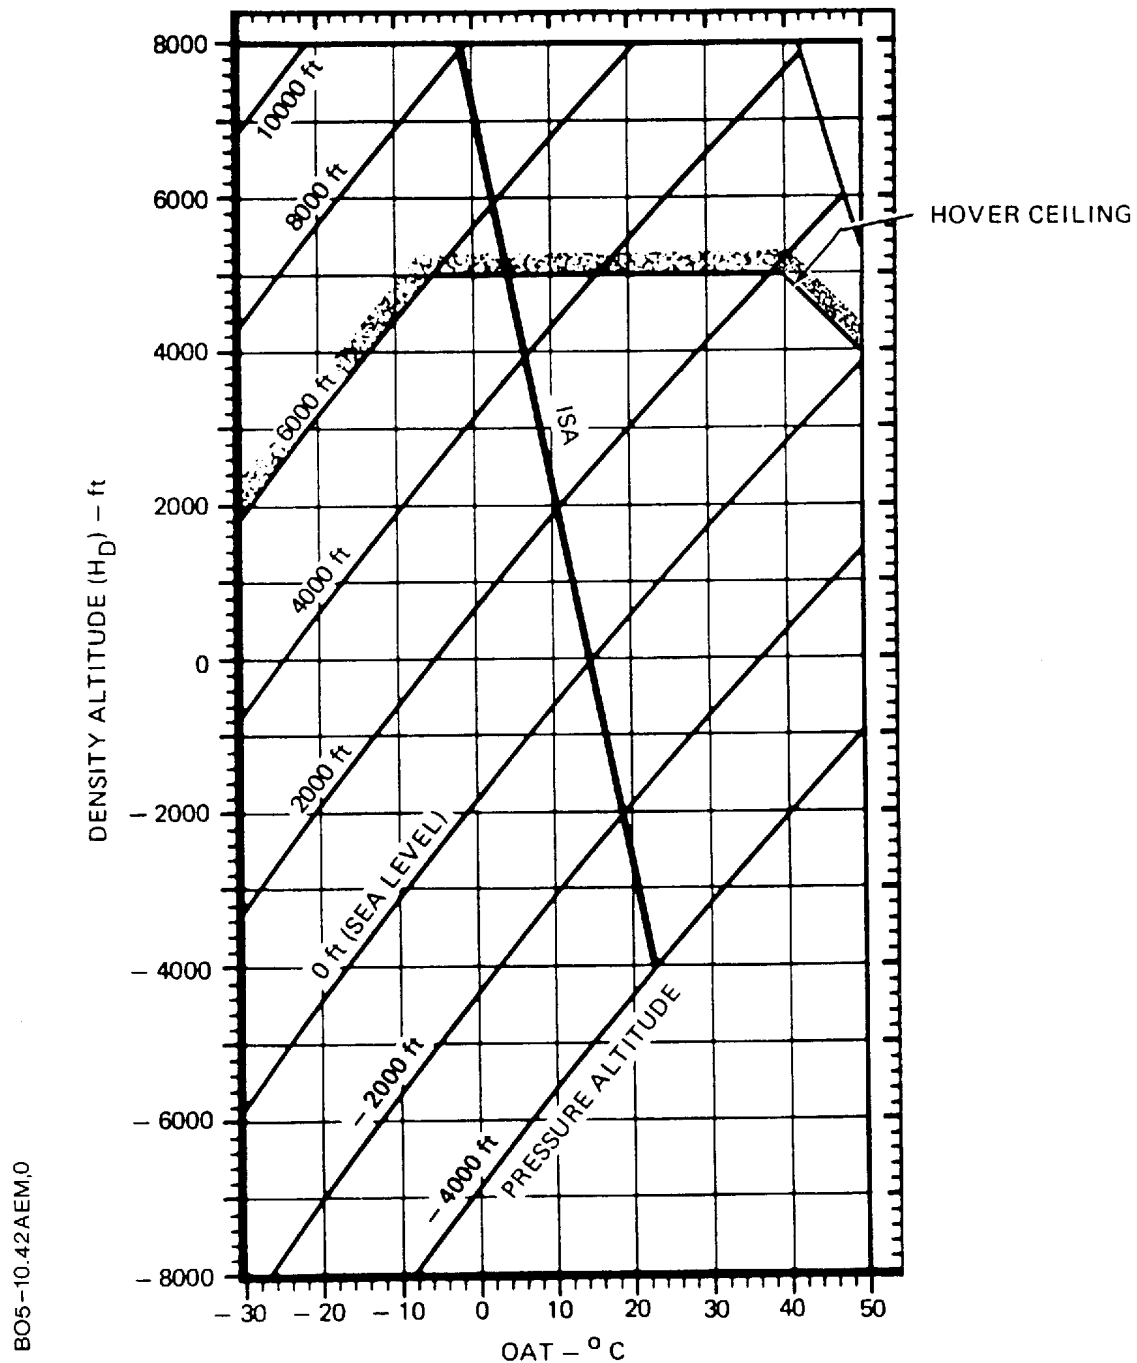


Fig. 3 Hover Ceiling I G E - GM 2400-2500 kg

EFFECTIVITY ALL

LBA APPROVED

Rev. 0