

5. PERFORMANCE DATA

No change in the basic Flight Manual data.

6. MASS AND BALANCE

6.1 EQUIPMENT LIST ENTRIES

System/Equipment Designation	Part No.	Mass (kg)	Arm (mm)	Massmoment (kgmm)
Landing/Search Light, 250W	105-98403	2.2	900	1980
Landing/Search Light, 450W	105-98404	2.2	900	1980

7. SYSTEM DESCRIPTION

A retractable and rotatable landing/search light is installed in the fuselage lower nose area. Controls for operation of the light are located on each of the collective levers and comprise a three-position toggle switch for lamp control and either two three-position toggle switches or one four-way thumb switch for directional control. The LH collective directional control switch commands have priority and will override those of the RH control switch.

The light can be controlled to any position from fully retracted to fully extended and may be rotated in either direction a full 360° continuously when in any position other than fully retracted.

A LDG LIGHT indicator light on the switch panel comes on whenever:

- the lamp is switched ON, or
- the light unit is not in its stowed position with the lamp switched OFF.

Holding the lamp control switch in the spring-loaded RETR position will cause the light unit to fully retract and rotate to its stowed position flush with the fuselage. Release the switch when the LDG LIGHT indicator light goes off.

The landing/search light is supplied 28V DC power from the Main Bus via two LANDING LIGHT circuit breakers, CONT and LAMP located on the switch panel.

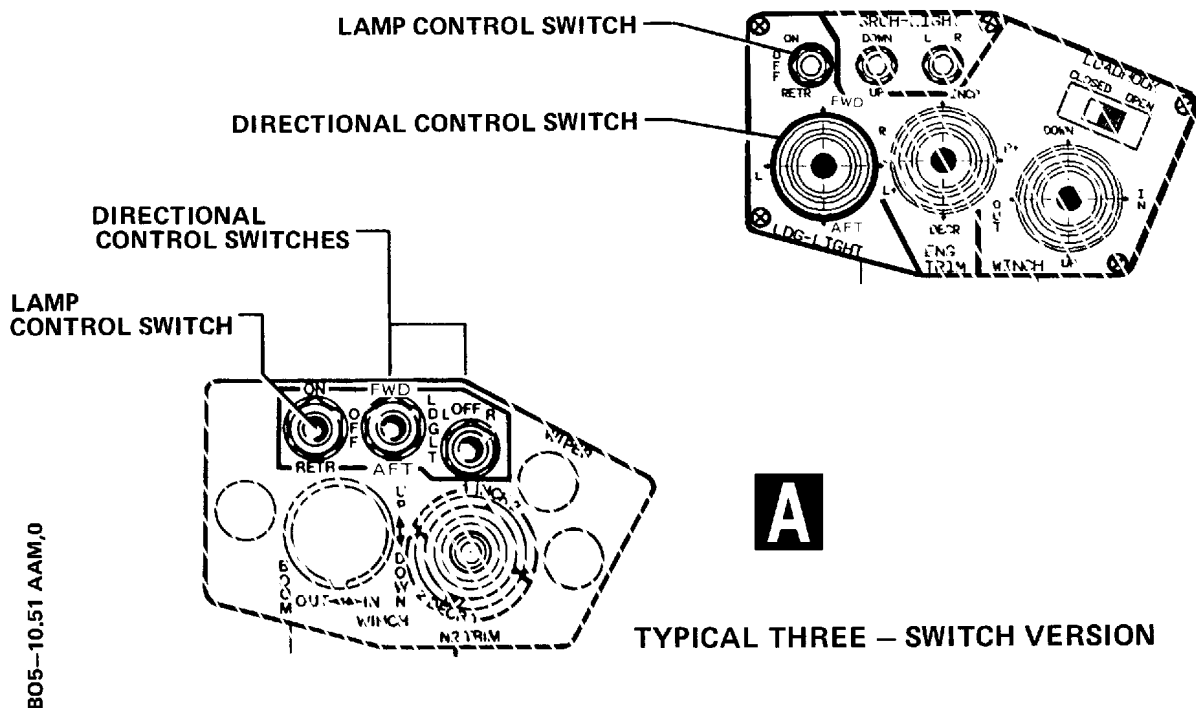
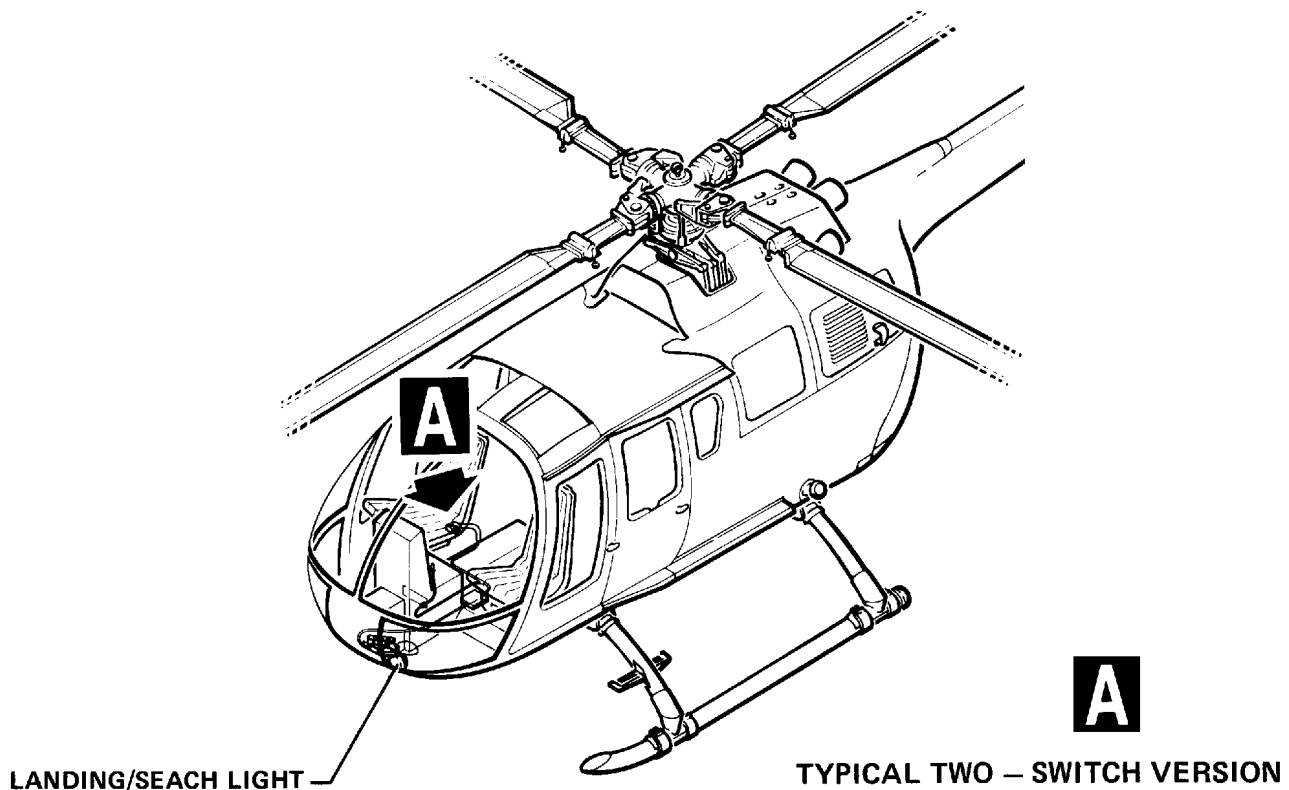


Fig. 1 Landing/Search Light