

B. ELEVATED OR RESTRICTED HELIPADS (VTOL)

1. GENERAL

This subsection provides standardized vertical takeoff and landing (VTOL) procedures for FMS 11-4 operations at elevated or restricted helipads.

2. LIMITATIONS

2.1 CERTIFICATION CRITERIA

The emergency and normal procedures apply to:

- restricted helipads having dimensions of at least 15 x 15 meters under day and night conditions, and
- elevated helipads under day and night conditions. The minimum helipad size is defined as 20 x 20 meters for rectangular helipads or 20 meters diameter for circular helipads.

NOTE Operation on rectangular elevated helipads smaller than 20 x 20 meters but not less than 15 x 15 meters are possible, however, require individual operational approval and enhanced attention during takeoff and landing.

2.2 OPERATIONAL LIMITATIONS

2.2.1 Helipad Surface

Surface shall be solid to generate ground effect.

2.2.2 Wind Limits

Takeoff and landing with tailwind component is prohibited.

Max sidewind component (unfactored) 17 kt

2.2.3 Bleed Air Consumers

Bleed air consumers must be off during takeoff and landing when at or below 1000 ft above the takeoff/landing area.

2.2.4 Icing Prevention Measures

FMS 11-4 operations at elevated or restricted helipads are prohibited whenever the ambient temperature is below +4 °C and visible moisture is present.

2.3 MASS LIMITS

For maximum takeoff and landing gross mass refer to Fig. 9.

EXAMPLE: (see Fig. 9)

Determine: **Max takeoff and landing gross mass, wind calm**

Known: OAT 15 °C
Pressure altitude SL
Wind Calm

Solution: 1. Enter chart at known OAT (15 °C).
2. Move up to known pressure altitude (SL).
3. Move right and read gross mass = 2180 kg.

Determine: **Max takeoff and landing gross mass, with headwind**

Known: OAT 15 °C
Pressure altitude SL
Headwind 10 kt

Solution: 1. Enter chart at known OAT (15 °C).
2. Move up to known pressure altitude (SL).
3. Move right to reference line and then down following curve of guide lines.
4. Reenter chart at known headwind (10 kt) and move up to intersect tracing from above.
5. From point of intersection move right and read gross mass = 2242 kg.

VTOL - MAXIMUM TAKEOFF AND LANDING GROSS MASS

1 X ALLISON 250-C20B

ANTI-ICING – OFF

BLEED AIR CONSUMERS – OFF

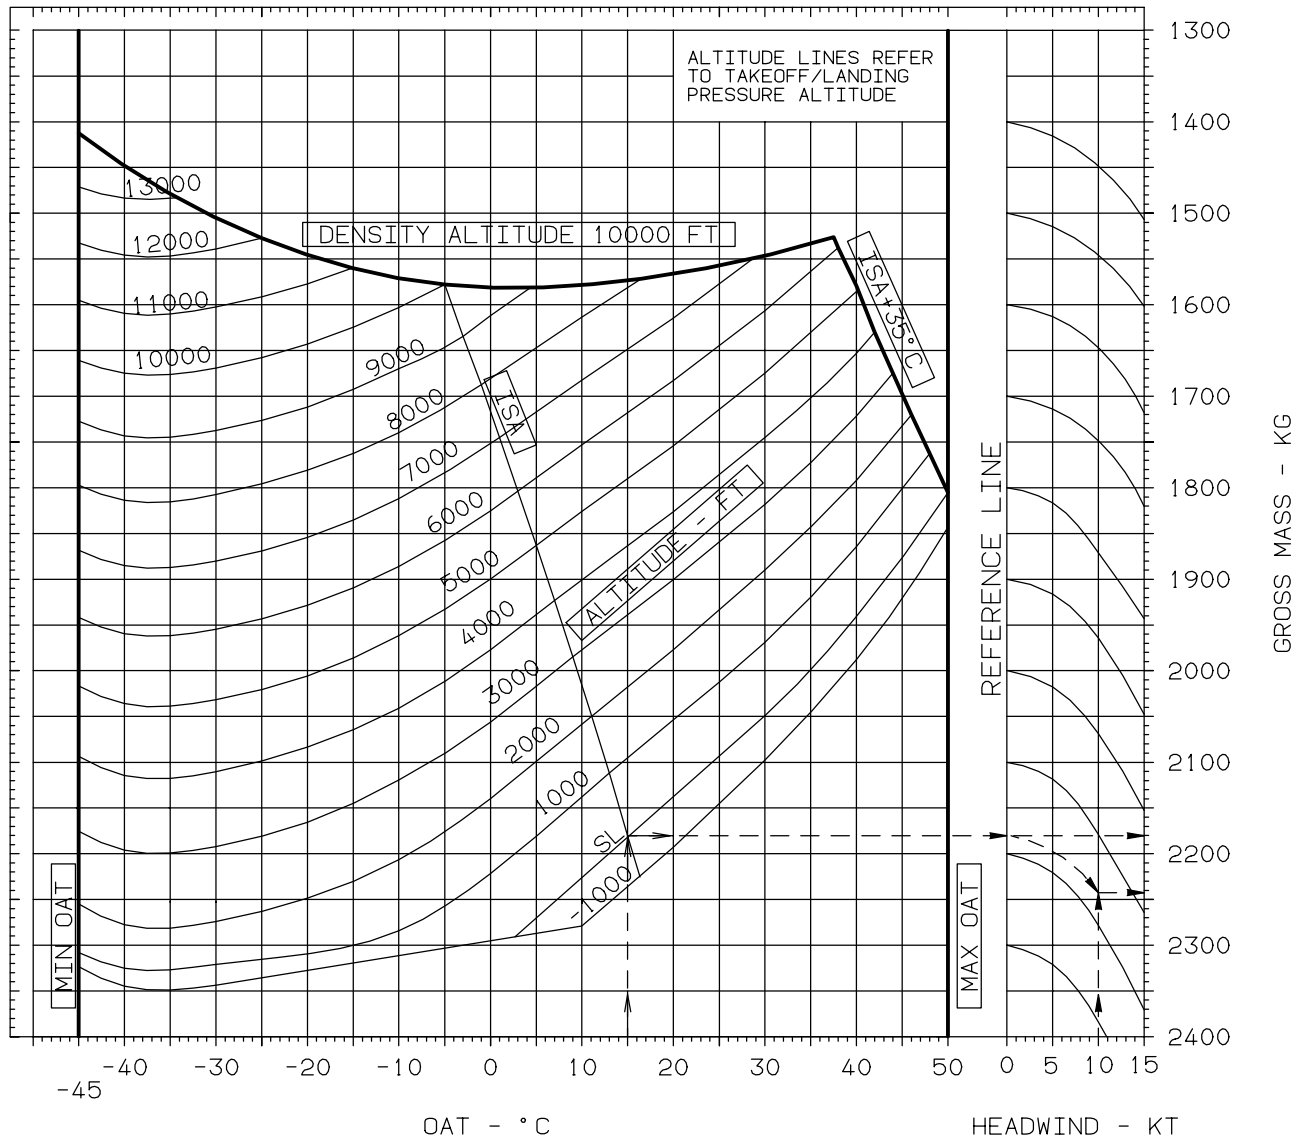


Fig. 9 VTOL - Maximum Takeoff and Landing Gross Mass