

5.6 HOVER CEILING (see Fig. 5-7 thru 5-10)

These hover ceiling charts present the maximum gross mass for hover in and out of ground effect at various conditions of pressure altitude and outside air temperature, and under different power settings. The charts for hover in ground effect are based on a skid height of 3 ft and are calculated for hovering with engine anti-icing OFF.

NOTE • For operations requiring engine anti-icing ON, reduce the chart derived gross mass value by 120 kg.

- OGE hover ceiling diagrams are valid for no wind or headwind.

EXAMPLE: (see Fig. 5-7)

Determine: **Maximum gross mass for hovering, all engines operating**

Known: OAT 8 °C
Pressure altitude 8000 ft

Solution: 1. Enter chart at known OAT (8 °C).
2. Move vertically upward to known pressure altitude (8000 ft).
3. Move horizontally left and read maximum gross mass = 2265 kg.

Determine: **Maximum gross mass for hovering, all engines operating and engine anti-icing ON**

Known: OAT 8 °C
Pressure altitude 8000 ft

Solution: 1. Enter chart at known OAT (8 °C).
2. Move vertically upward to known pressure altitude (8000 ft).
3. Move horizontally left and read maximum gross mass = 2265 kg.
4. Subtract 120 kg from chart derived value (2265 kg) for 2145 kg maximum gross mass for hovering with all engines operating and engine anti-icing ON.

HOVER CEILING IN GROUND EFFECT

2 X ALLISON 250-C20B

AEO – TAKEOFF POWER (810 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

SKID HEIGHT – 3 FT

BLEED AIR CONSUMERS – OFF

NOTE FOR ALTITUDE/OAT COMBINATIONS NOT SHOWN, THE **GROSS MASS LIMIT** LINE SHALL APPLY.

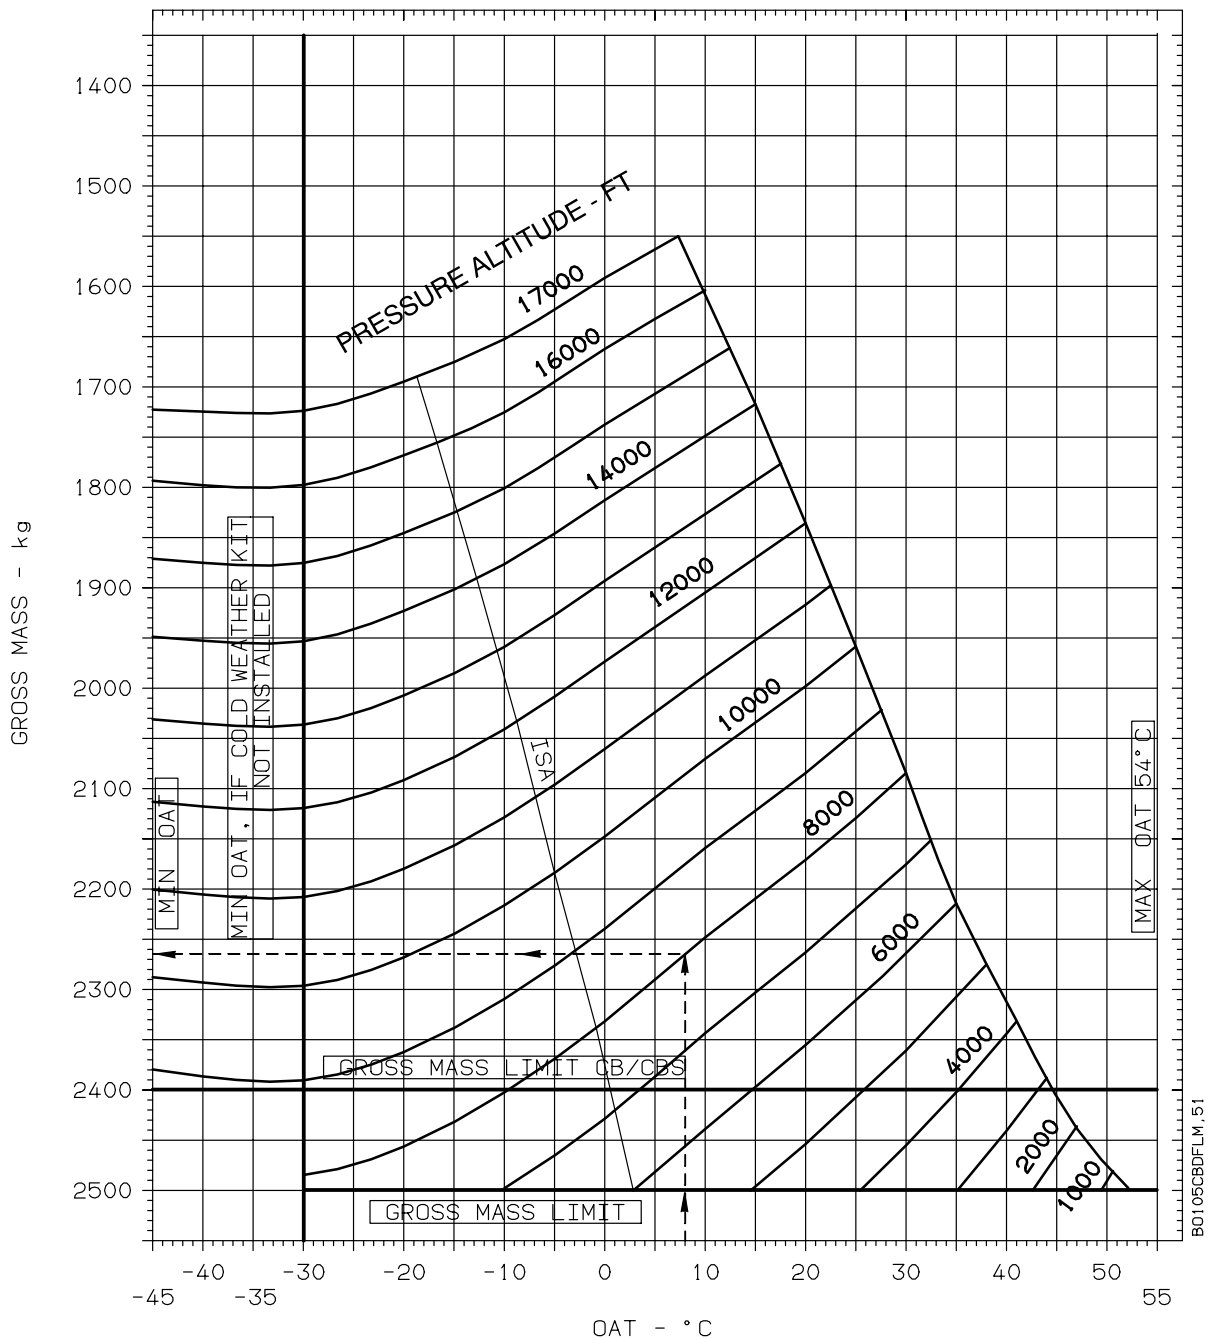


Fig. 5-7 Hover Ceiling I G E - TOP

HOVER CEILING IN GROUND EFFECT

2 X ALLISON 250-C20B

AEO – MAX CONTINUOUS POWER (779 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

SKID HEIGHT – 3 FT

BLEED AIR CONSUMERS – OFF

NOTE FOR ALTITUDE/OAT COMBINATIONS NOT SHOWN, THE **GROSS MASS LIMIT** LINE SHALL APPLY.

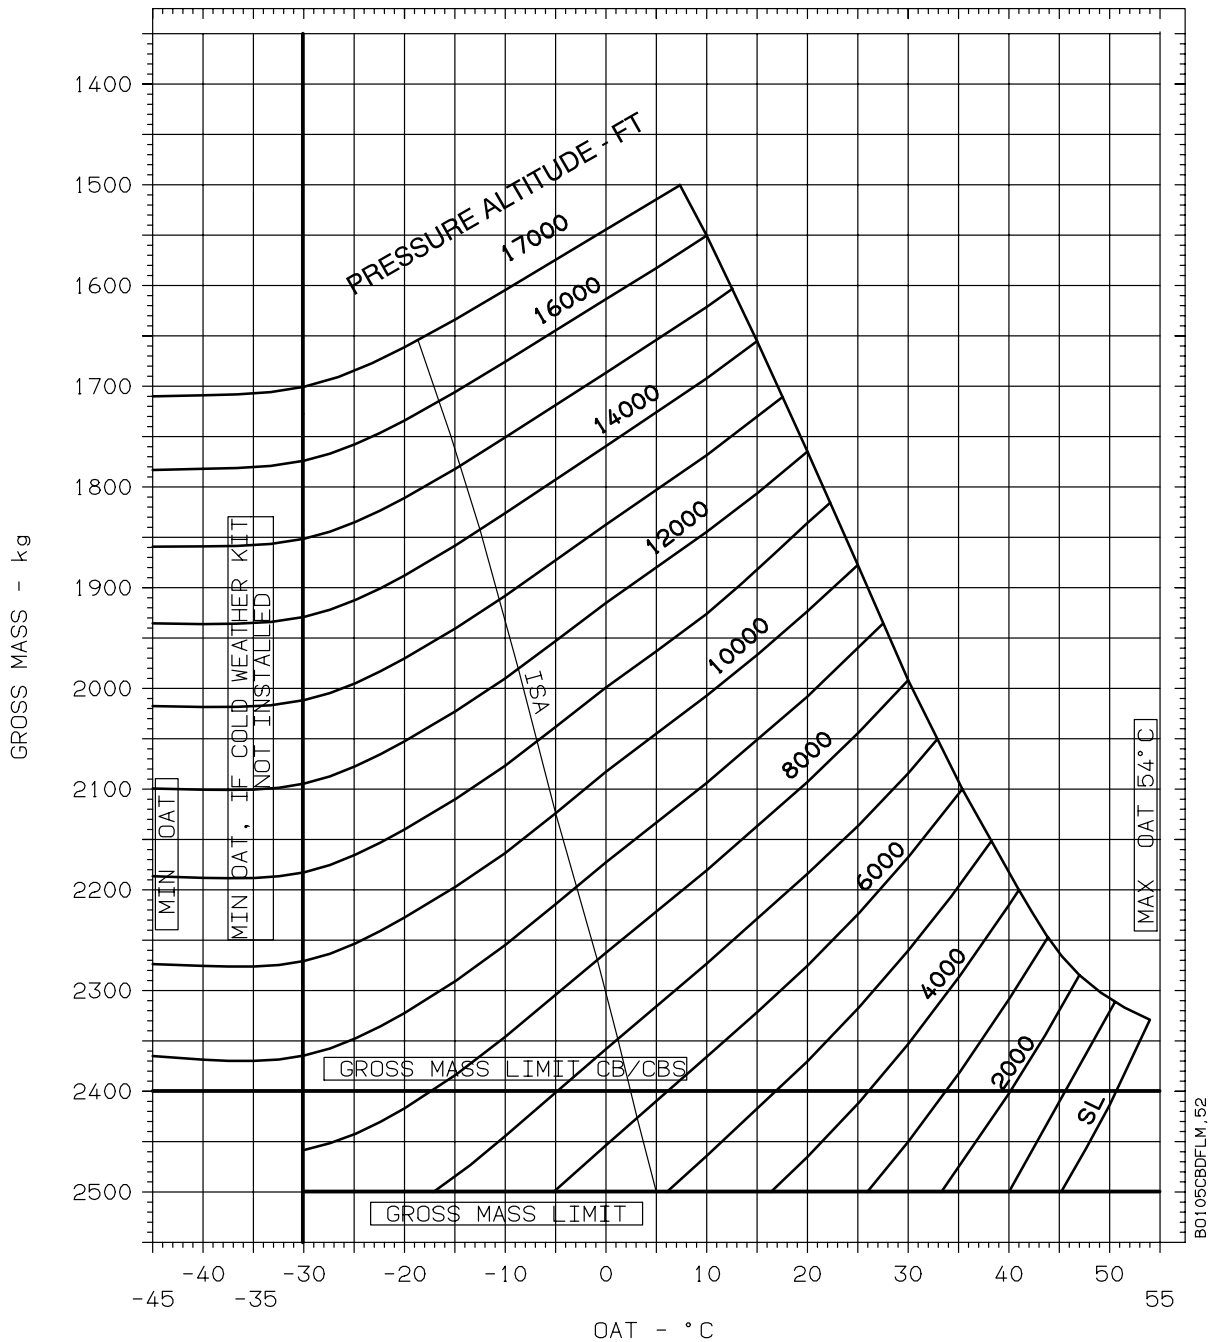


Fig. 5-8 Hover Ceiling I G E - MCP

HOVER CEILING OUT OF GROUND EFFECT

2 X ALLISON 250-C20B

AEO – TAKEOFF POWER (810 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

BLEED AIR CONSUMERS – OFF

NOTE FOR ALTITUDE/OAT COMBINATIONS NOT SHOWN, THE **GROSS MASS LIMIT** LINE SHALL APPLY.

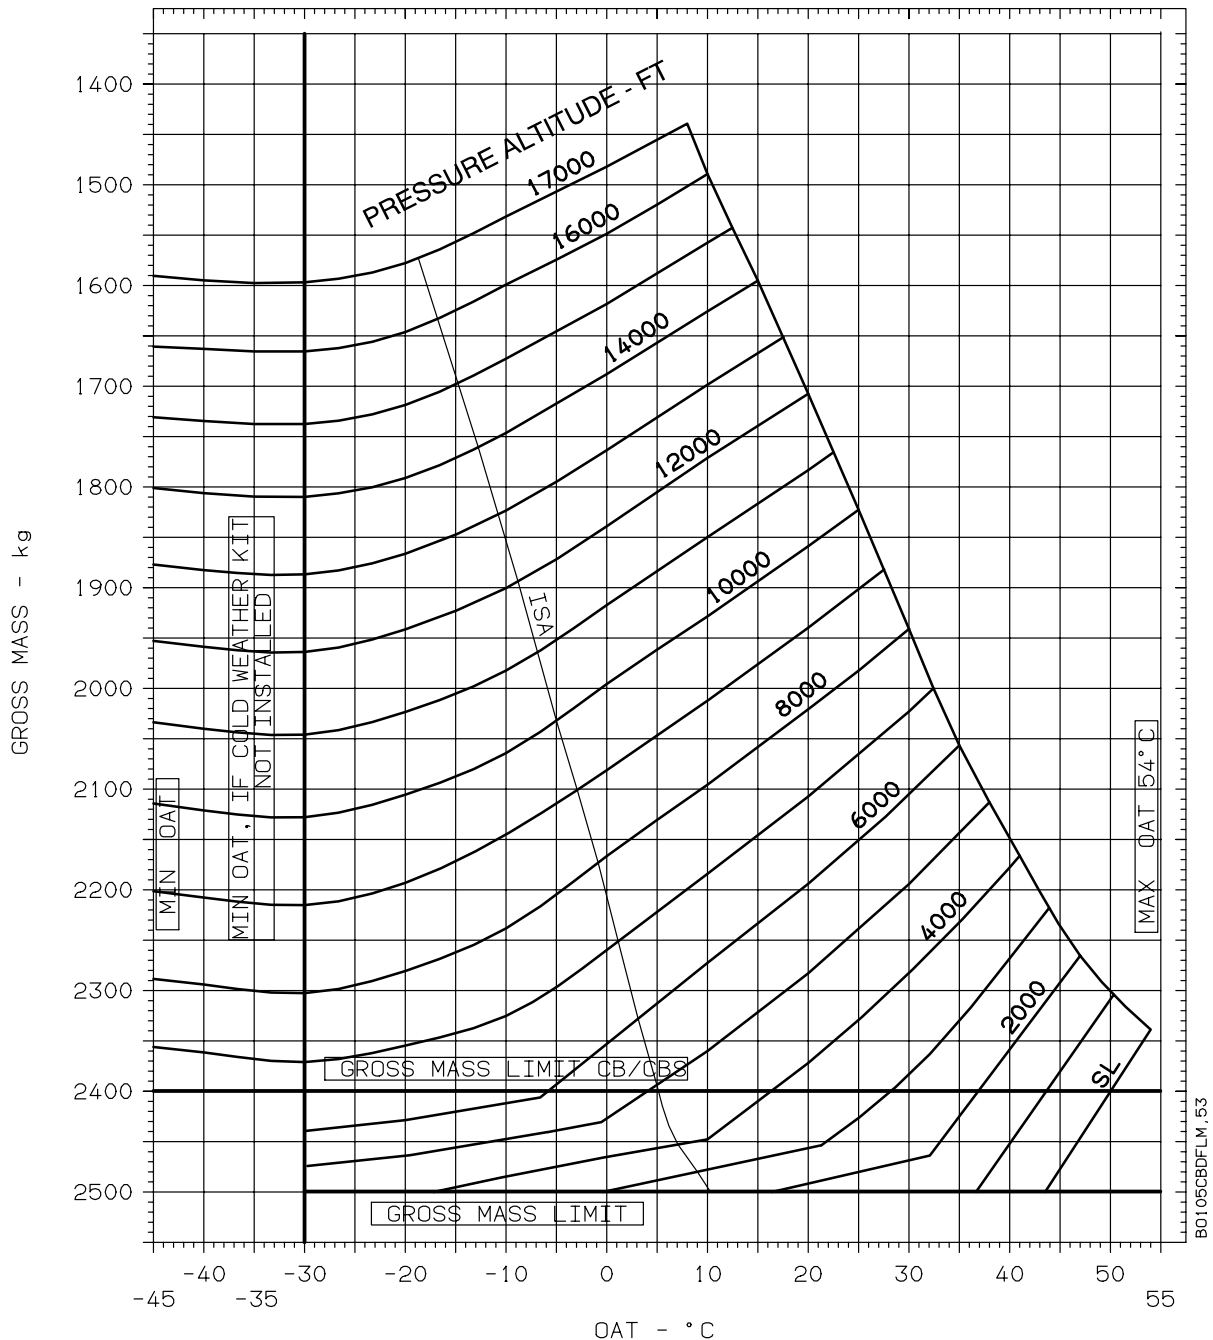


Fig. 5-9 Hover Ceiling O G E - TOP

HOVER CEILING OUT OF GROUND EFFECT

2 X ALLISON 250-C20B

AEO – MAX CONTINUOUS POWER (779 °C TOT, 86% TORQUE)

ANTI-ICING – OFF

BLEED AIR CONSUMERS – OFF

NOTE FOR ALTITUDE/OAT COMBINATIONS NOT SHOWN, THE **GROSS MASS LIMIT** LINE SHALL APPLY.

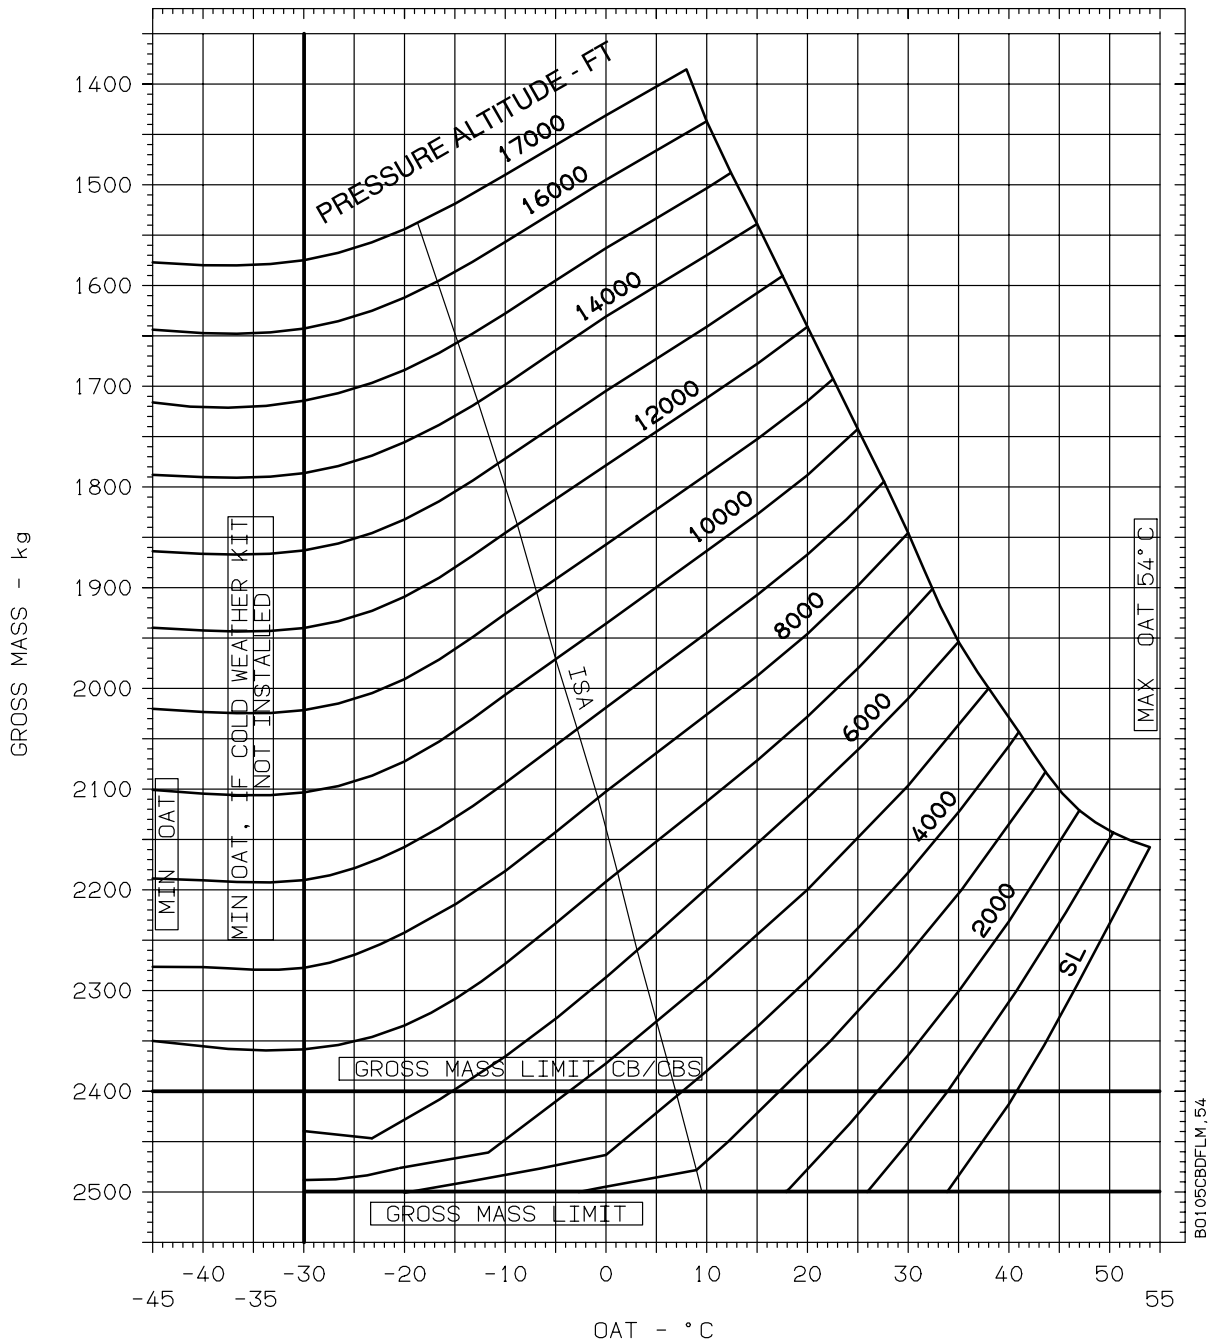


Fig. 5-10 Hover Ceiling O G E - MCP

LBA APPROVED

Rev. 1