

5.8 CLEAR AIRFIELD LANDING DISTANCE

Use of the clear airfield landing profile (see Fig. 5-15) assures the capability to land safely (on a smooth level surface) should an engine failure occur any time prior to or during an approach.

NOTE Go-around capability is NOT assured for OEI operation when using this clear airfield landing profile.

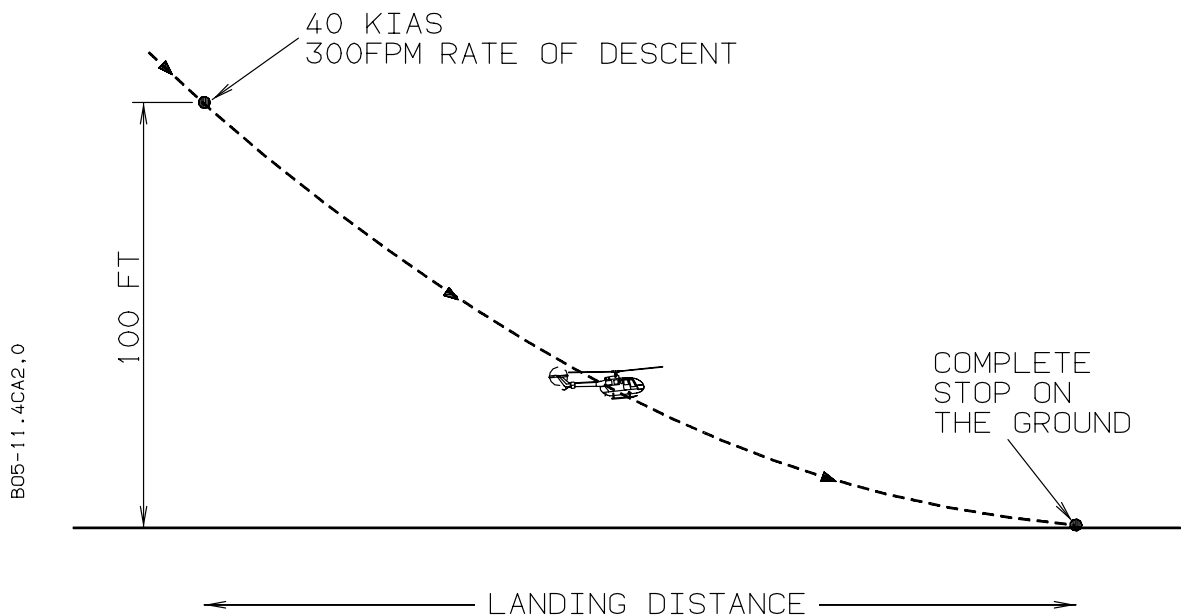


Fig. 5-15 Landing Profile - Clear Airfield

The landing distance chart (see Fig. 5-16) provides single engine landing performance data for various combinations of pressure altitude and outside air temperature. The chart shows the landing distance required for the helicopter to come to a complete stop on a smooth, hard and dry level surface. The presented data are valid for all gross masses up to 2500 kg.

To achieve the values derived from the landing distance chart, the landing approach path at a 100-ft height should be established with OEI power required to maintain a 300-fpm rate of descent at 40 KIAS.

NOTE For operations requiring engine anti-icing ON, increase the chart derived landing distance value by 100 ft.

EXAMPLE: (see Fig. 5-16)

Determine: **Landing Distance Required to Clear a 100-ft Obstacle**

Known: OAT 13 °C
Pressure altitude 2000 ft

Solution: 1. Enter chart at known OAT (13 °C).
2. Move horizontally right to known pressure altitude reference line (2000 ft).
3. From this intersection point move vertically down and read landing distance = 1805 ft.

CLEAR AIRFIELD LANDING DISTANCE (FROM 100-FT HEIGHT TO A COMPLETE STOP ON GROUND)

1 X ALLISON 250-C20B

POWER AS REQUIRED

ANTI-ICING – OFF

40 KIAS AND 300 FPM RATE OF DESCENT AT 100 FT HEIGHT

NOTE WITH ENGINE ANTI-ICING ON THE LANDING DISTANCE IS INCREASED BY 100 FT.

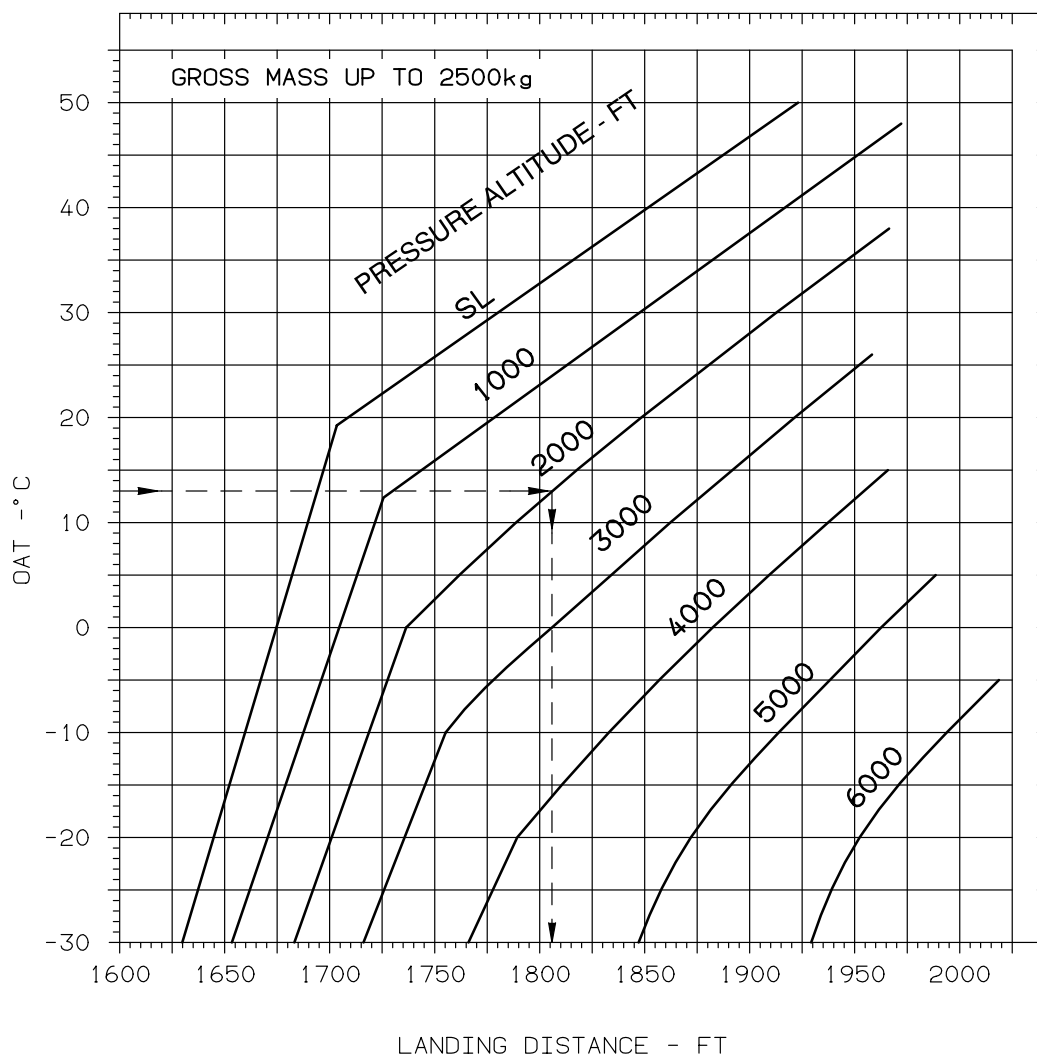


Fig. 5-16 Landing Distance - Clear Airfield

