

9.2 FUEL CONSUMPTION

The fuel consumption diagrams (see Fig. 9-1 thru 9-9) are based on the following conditions:

- Fuel density is 0.8 kg/l (6.682 lb/U.S. gal.)
- The fuel used meets one of the approved fuel types as specified in Section 2

FUEL CONSUMPTION
HOVER IN GROUND EFFECT
2 X ALLISON 250-C20B

ANTI-ICING - OFF

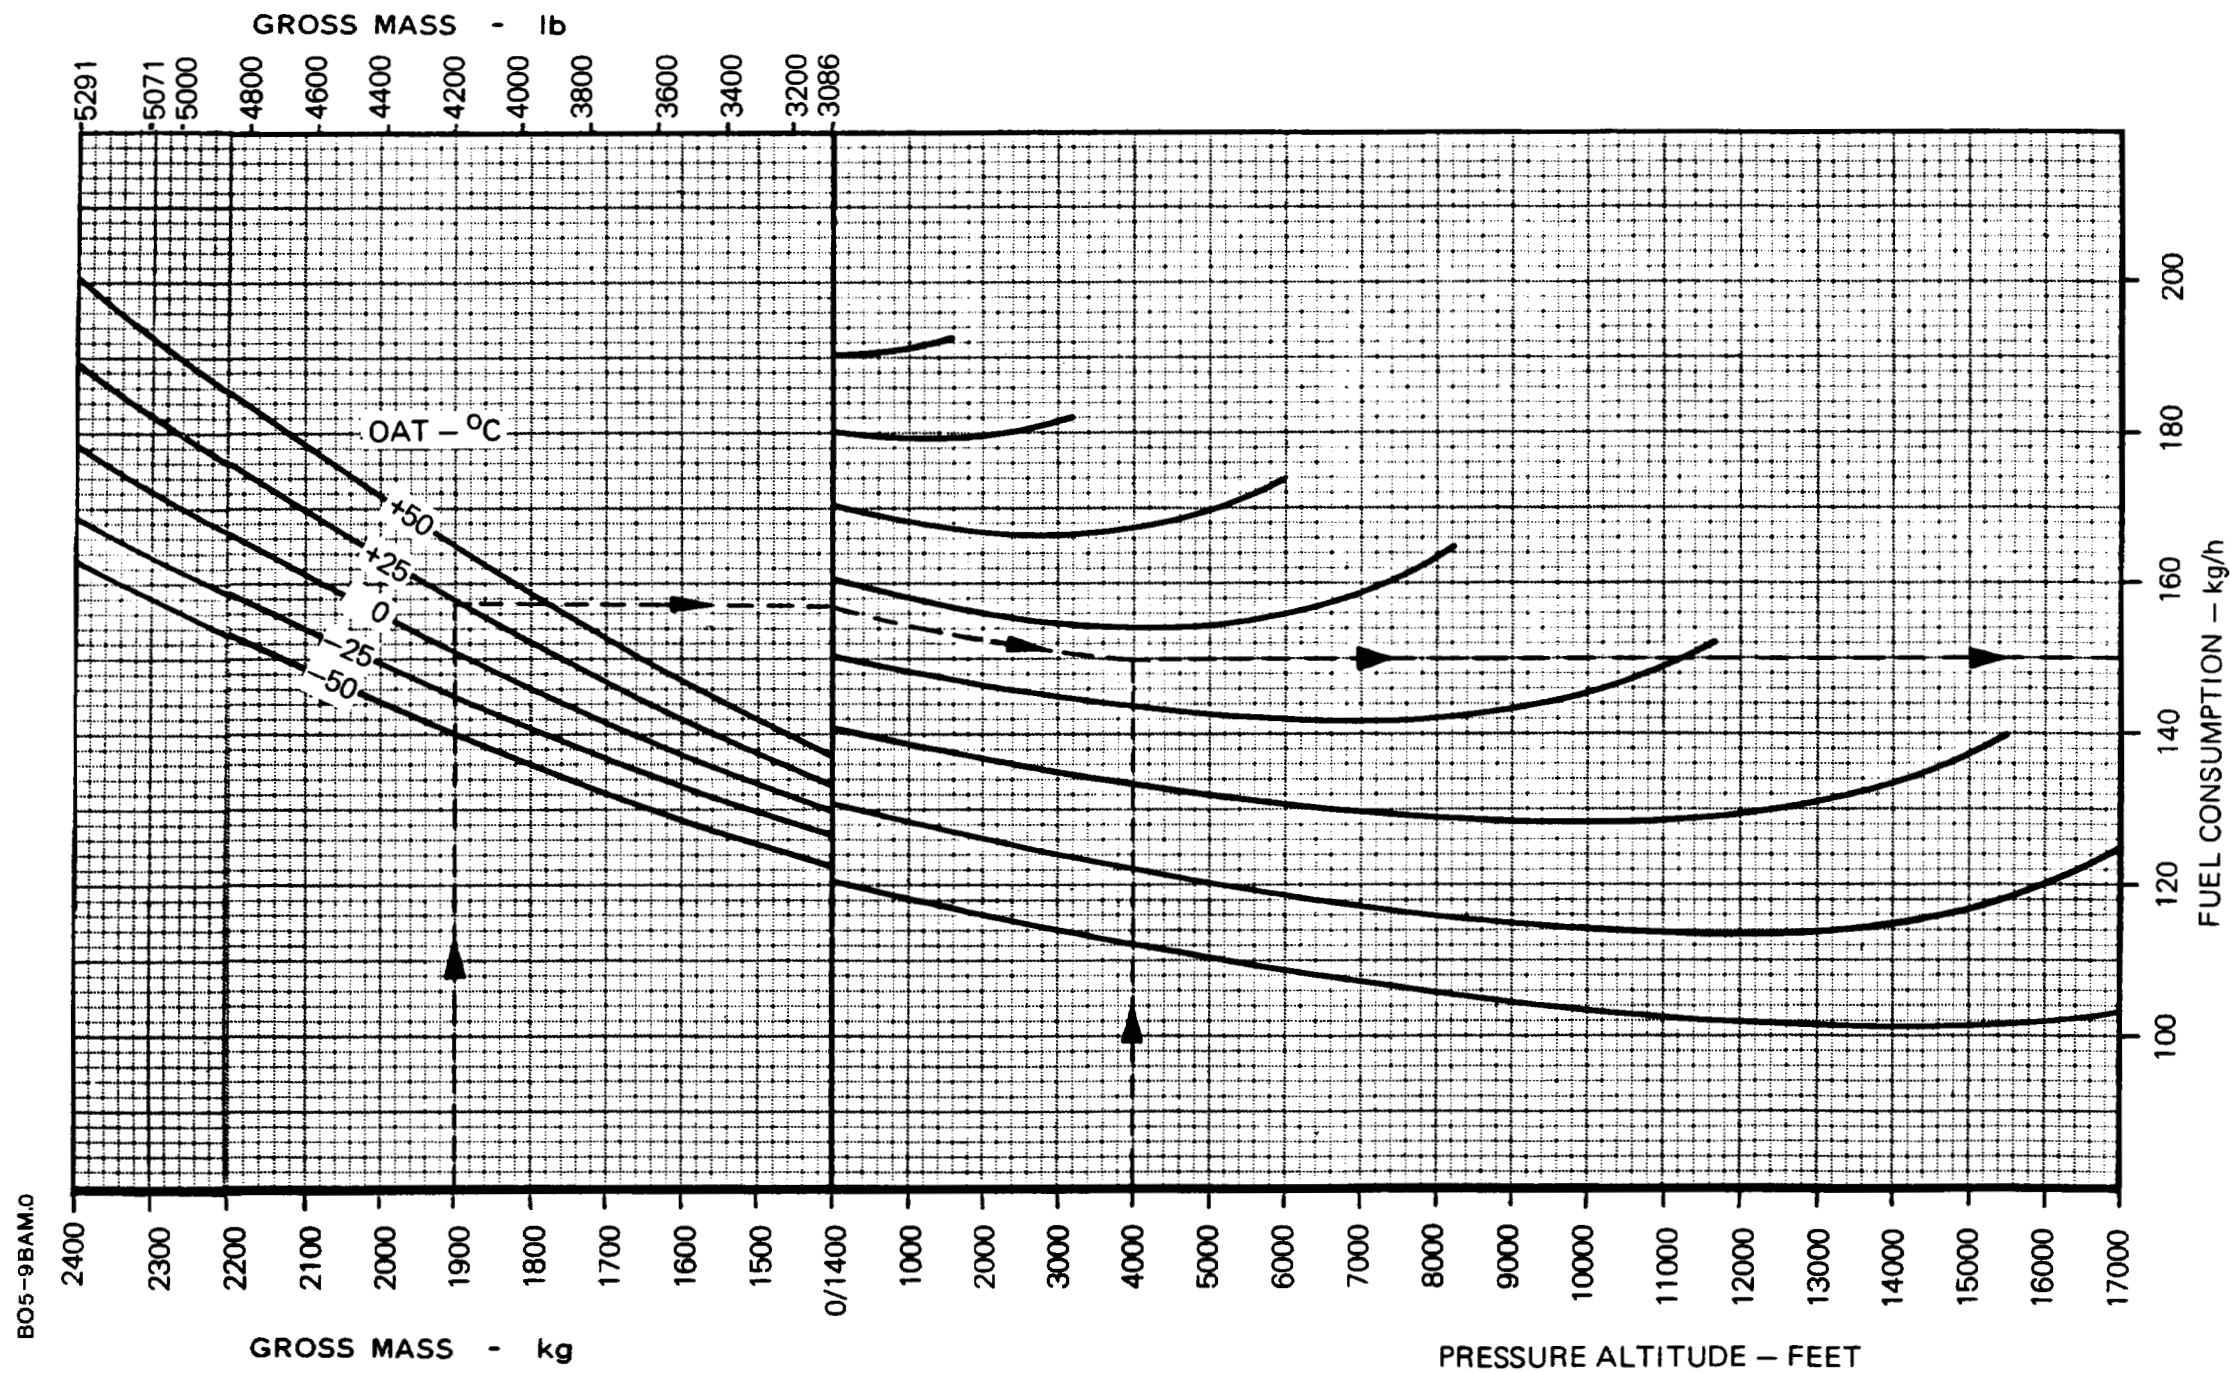


Fig. 9-1 Fuel Consumption - H I G E

FUEL CONSUMPTION

CRUISE FLIGHT, 0-80 KIAS

2 X ALLISON 250-C20B

OAT RANGE: 0 TO +50 °C

ANTI-ICING – OFF

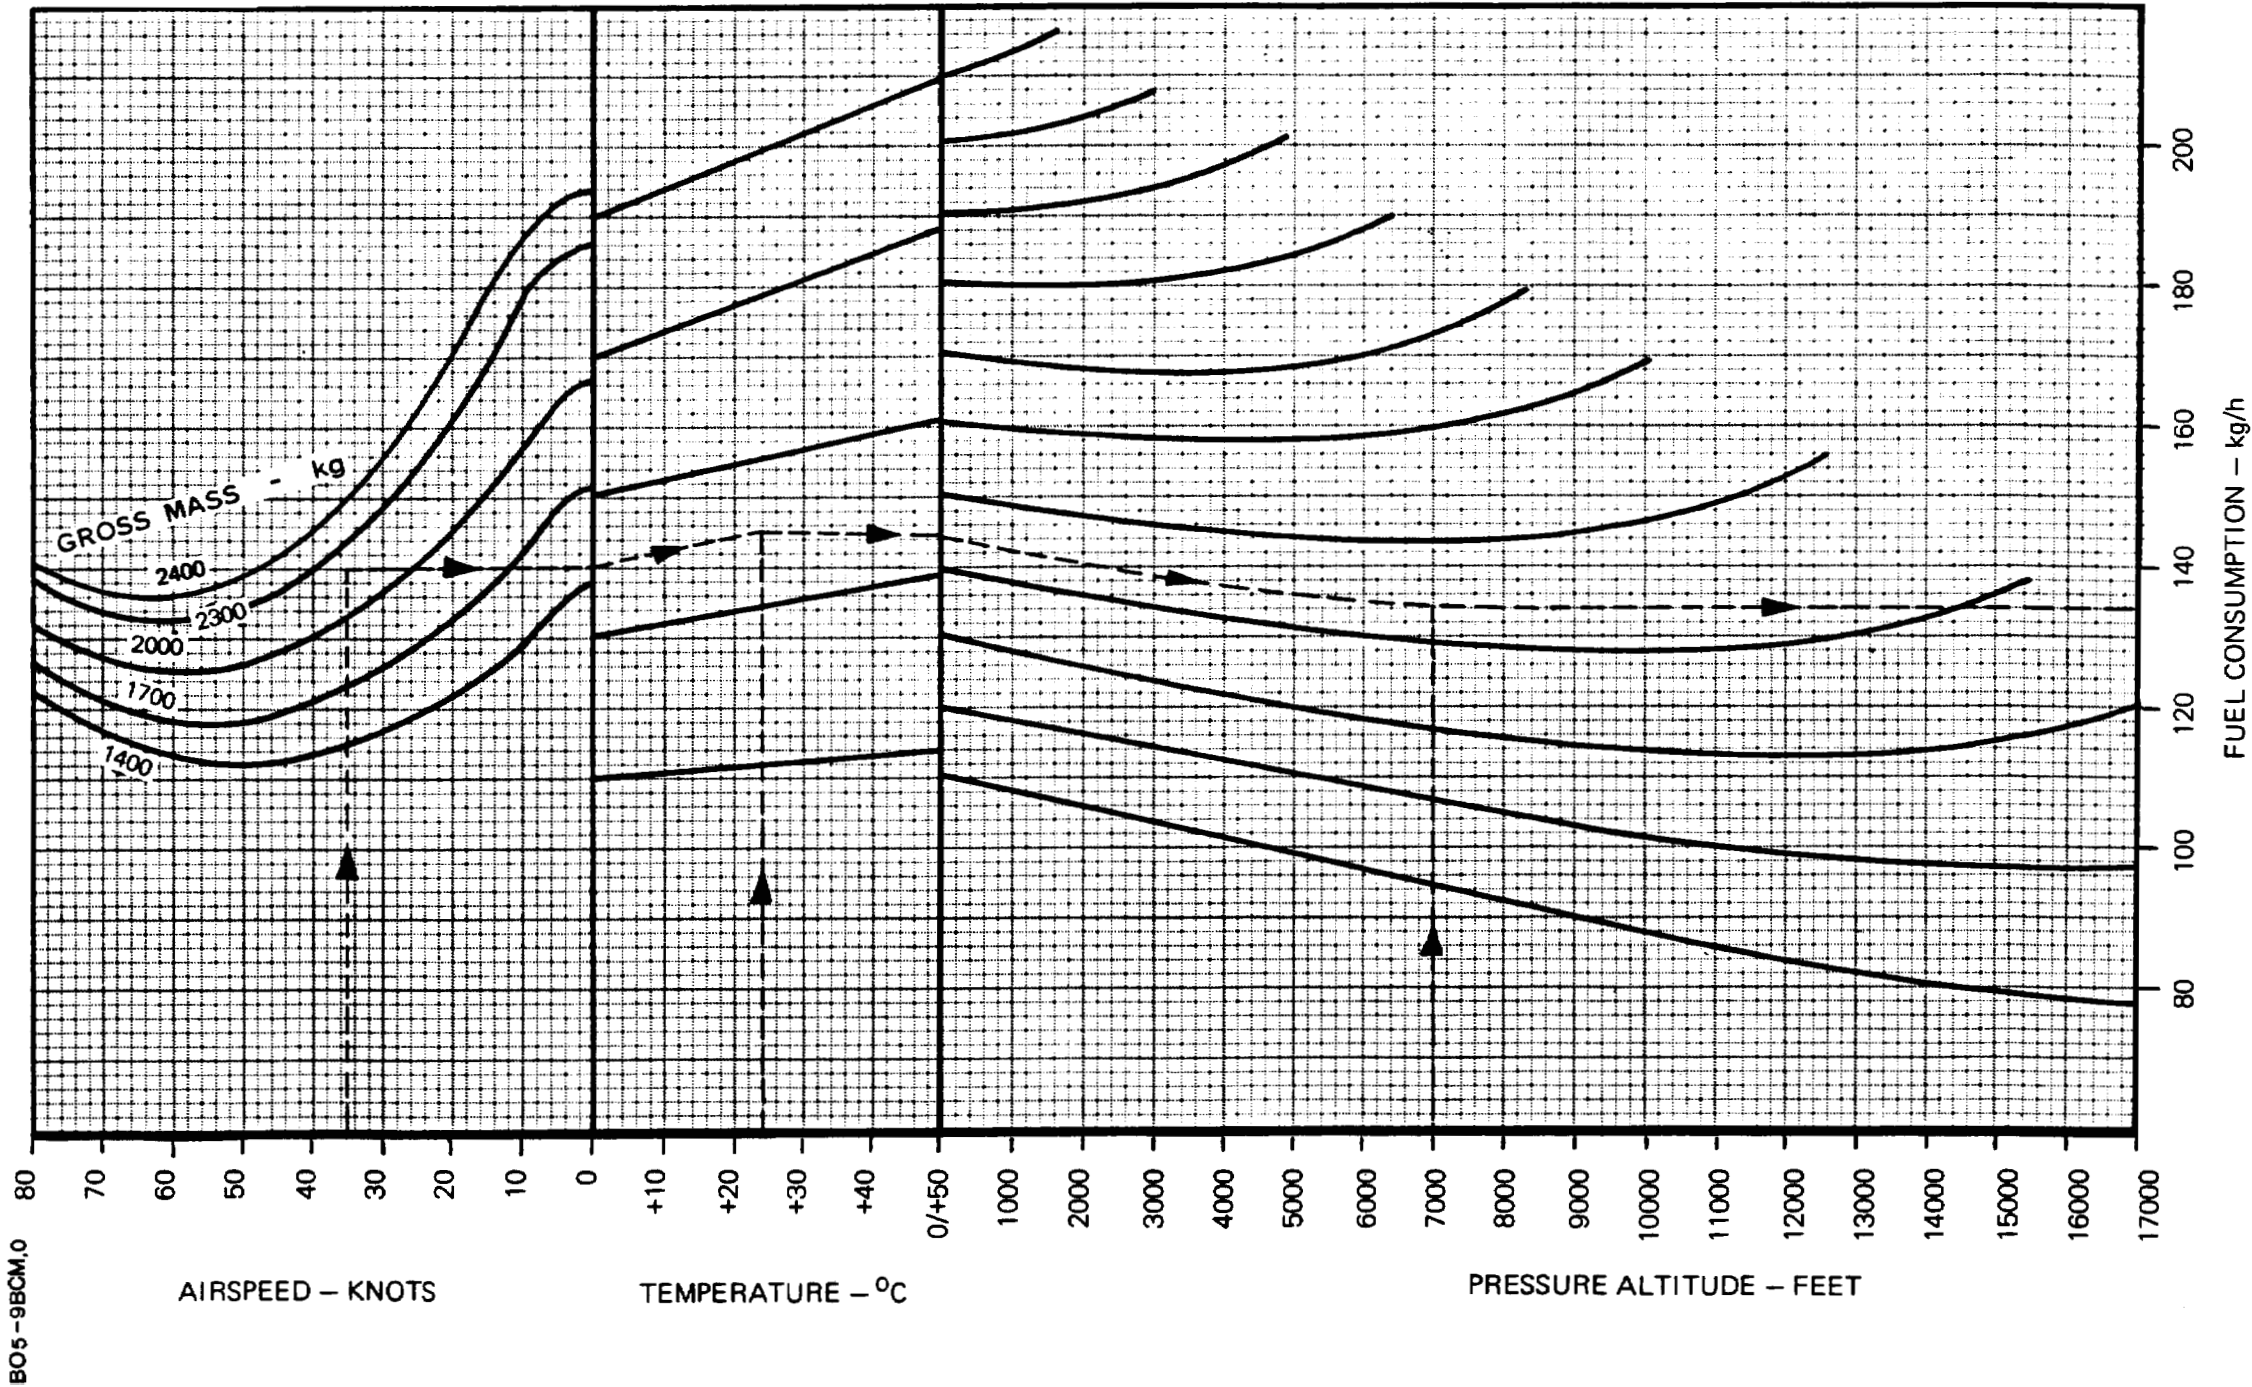


Fig. 9-2 Fuel Consumption - Cruise Flight, 0-80 KIAS, 0 to +50 °C

FUEL CONSUMPTION

CRUISE FLIGHT, 0-80 KIAS

2 X ALLISON 250-C20B

OAT RANGE: -50 TO 0 °C

ANTI-ICING - OFF

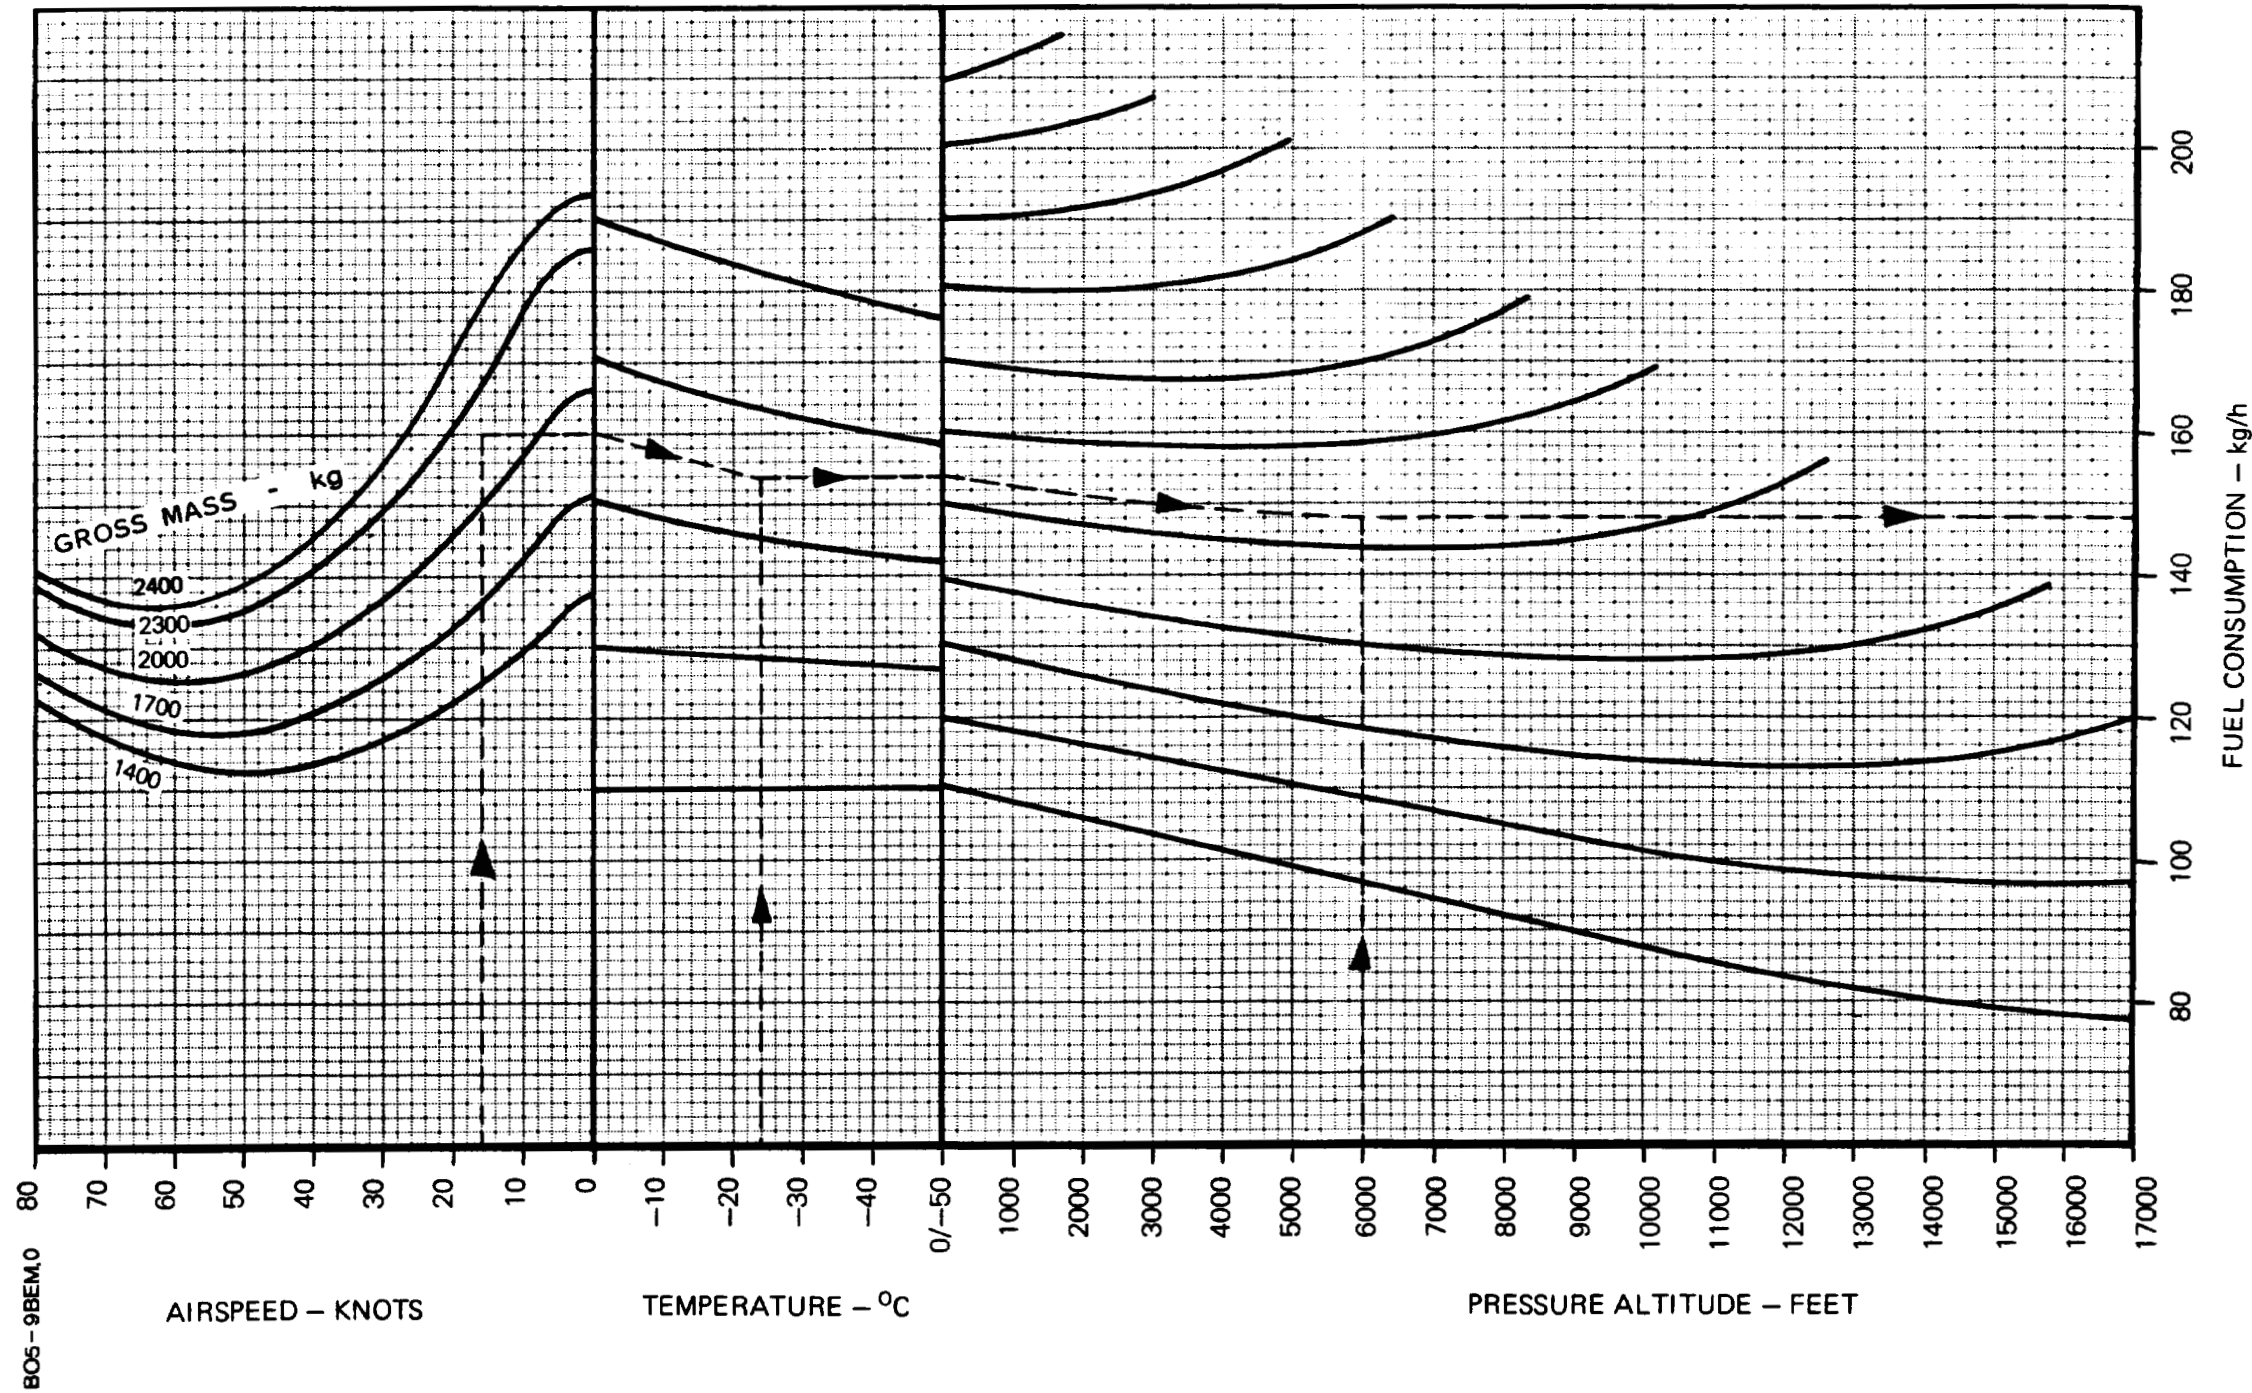


Fig. 9-3 Fuel Consumption - Cruise Flight, 0-80 KIAS, -50 to 0 °C

FUEL CONSUMPTION
CRUISE FLIGHT, ABOVE 70 KIAS
2 X ALLISON 250-C20B

OAT RANGE: -50 TO +10 °C ANTI-ICING - ON

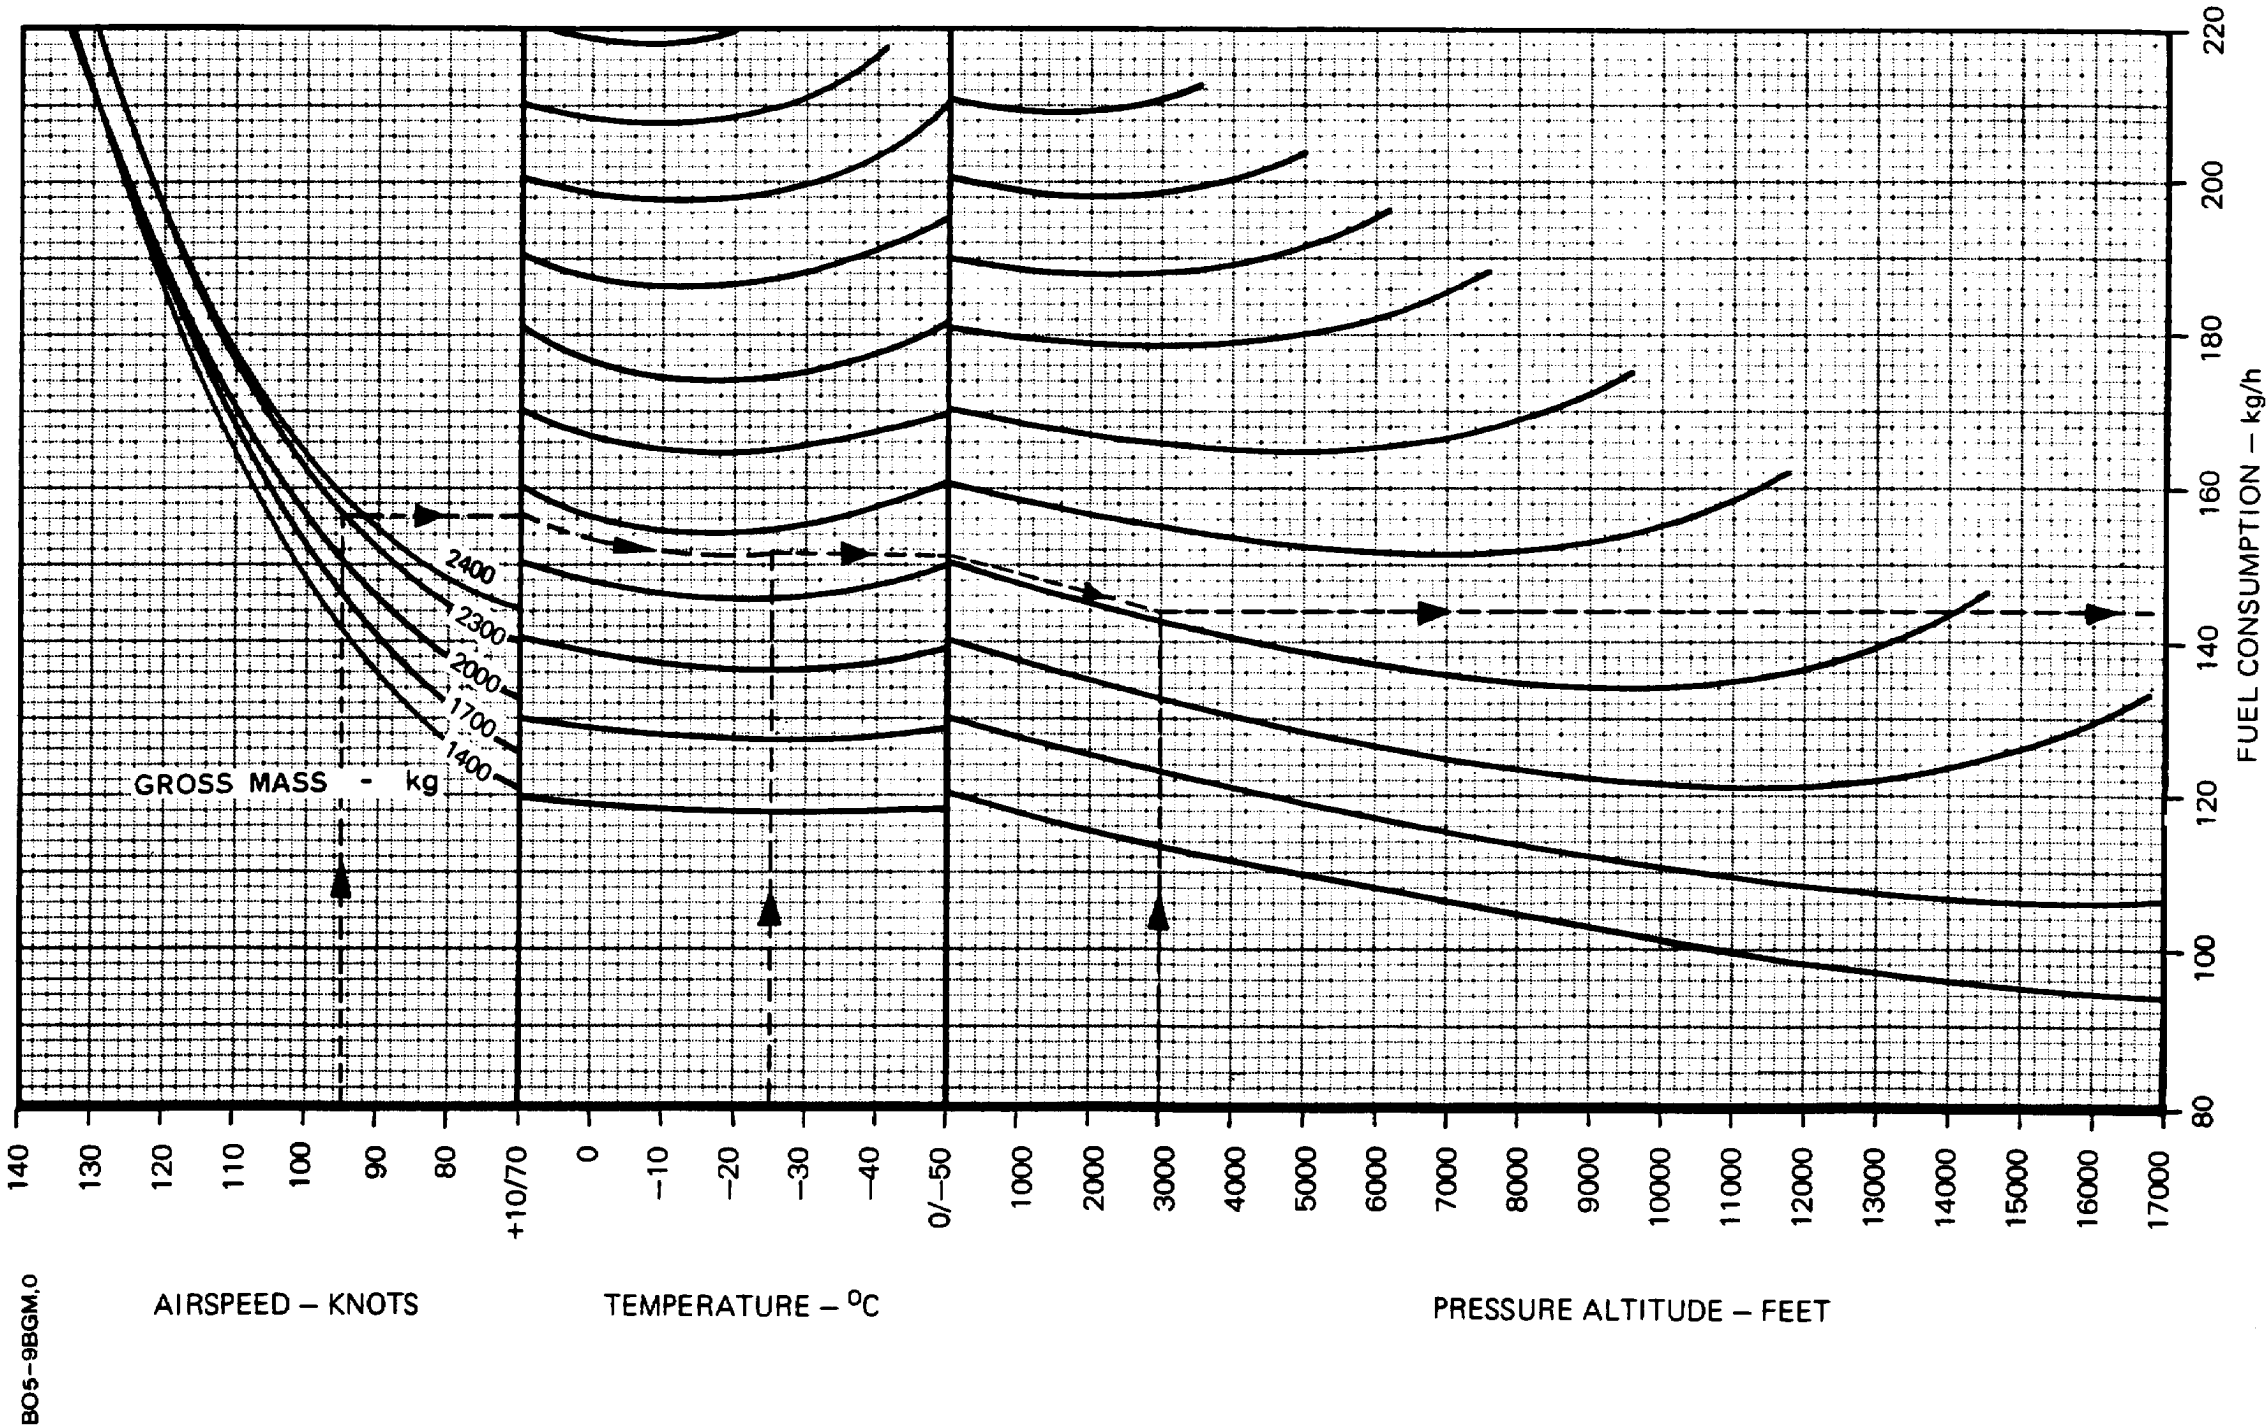


Fig. 9-4 Fuel Consumption - Cruise Flight, Above 70 KIAS, Anti-icing ON

FUEL CONSUMPTION
CRUISE FLIGHT, ABOVE 70 KIAS
2 X ALLISON 250-C20B

OAT RANGE: 0 TO +50 °C ANTI-ICING – OFF

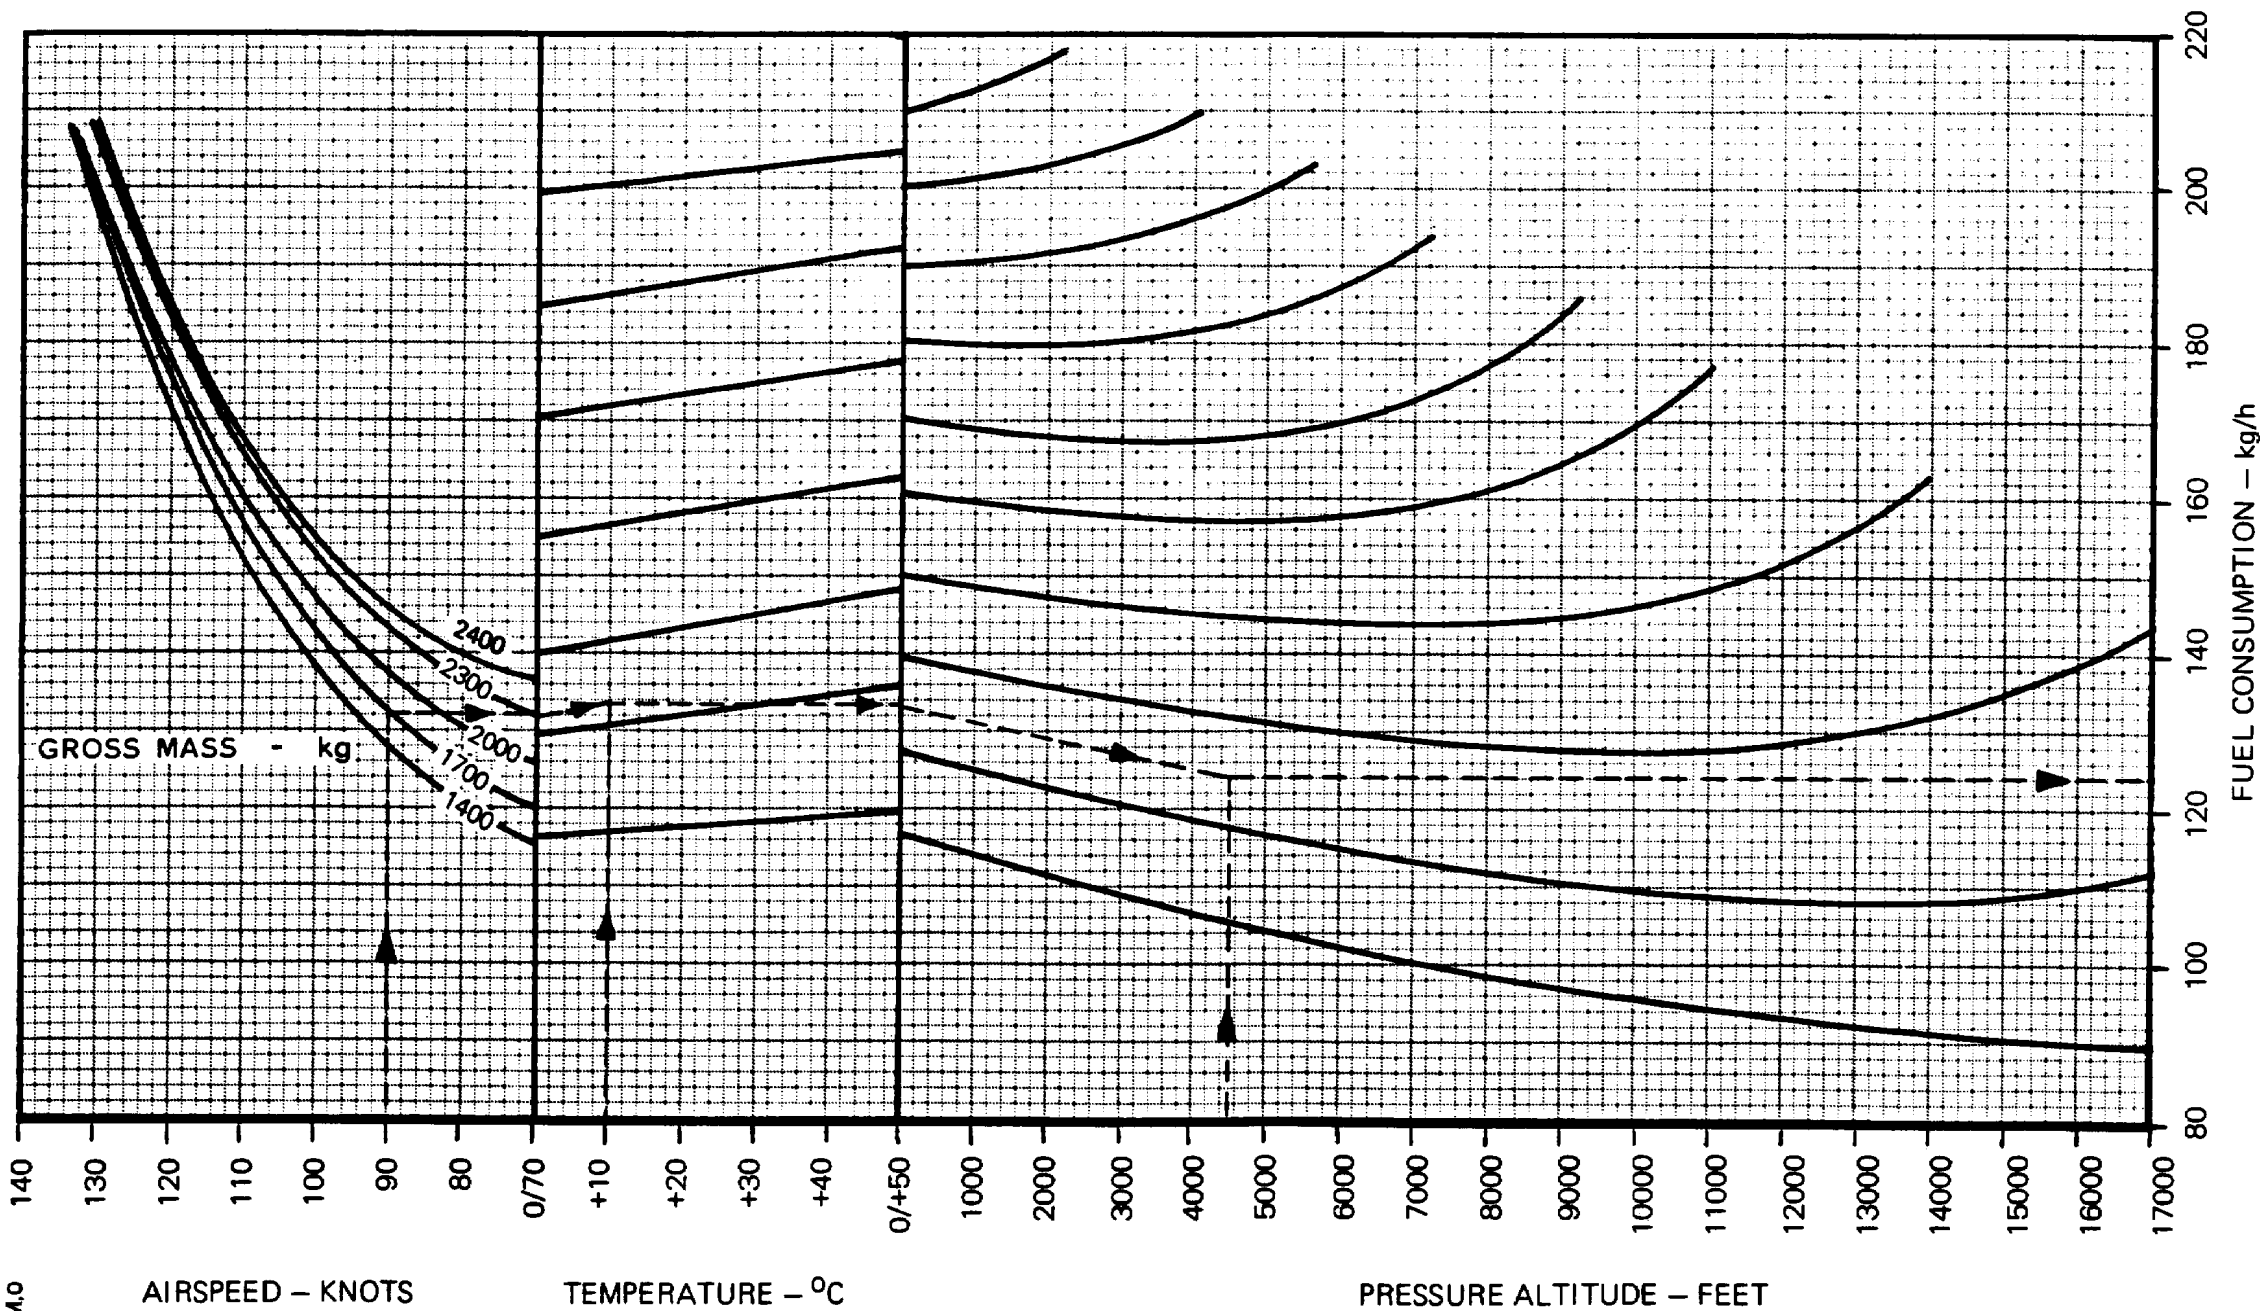


Fig. 9-5 Fuel Consumption - Cruise Flight, Above 70 KIAS, 0 to +50 °C

FUEL CONSUMPTION

CRUISE FLIGHT, ABOVE 70 KIAS

2 X ALLISON 250-C20B

OAT RANGE: -50 TO 0 °C

ANTI-ICING - OFF

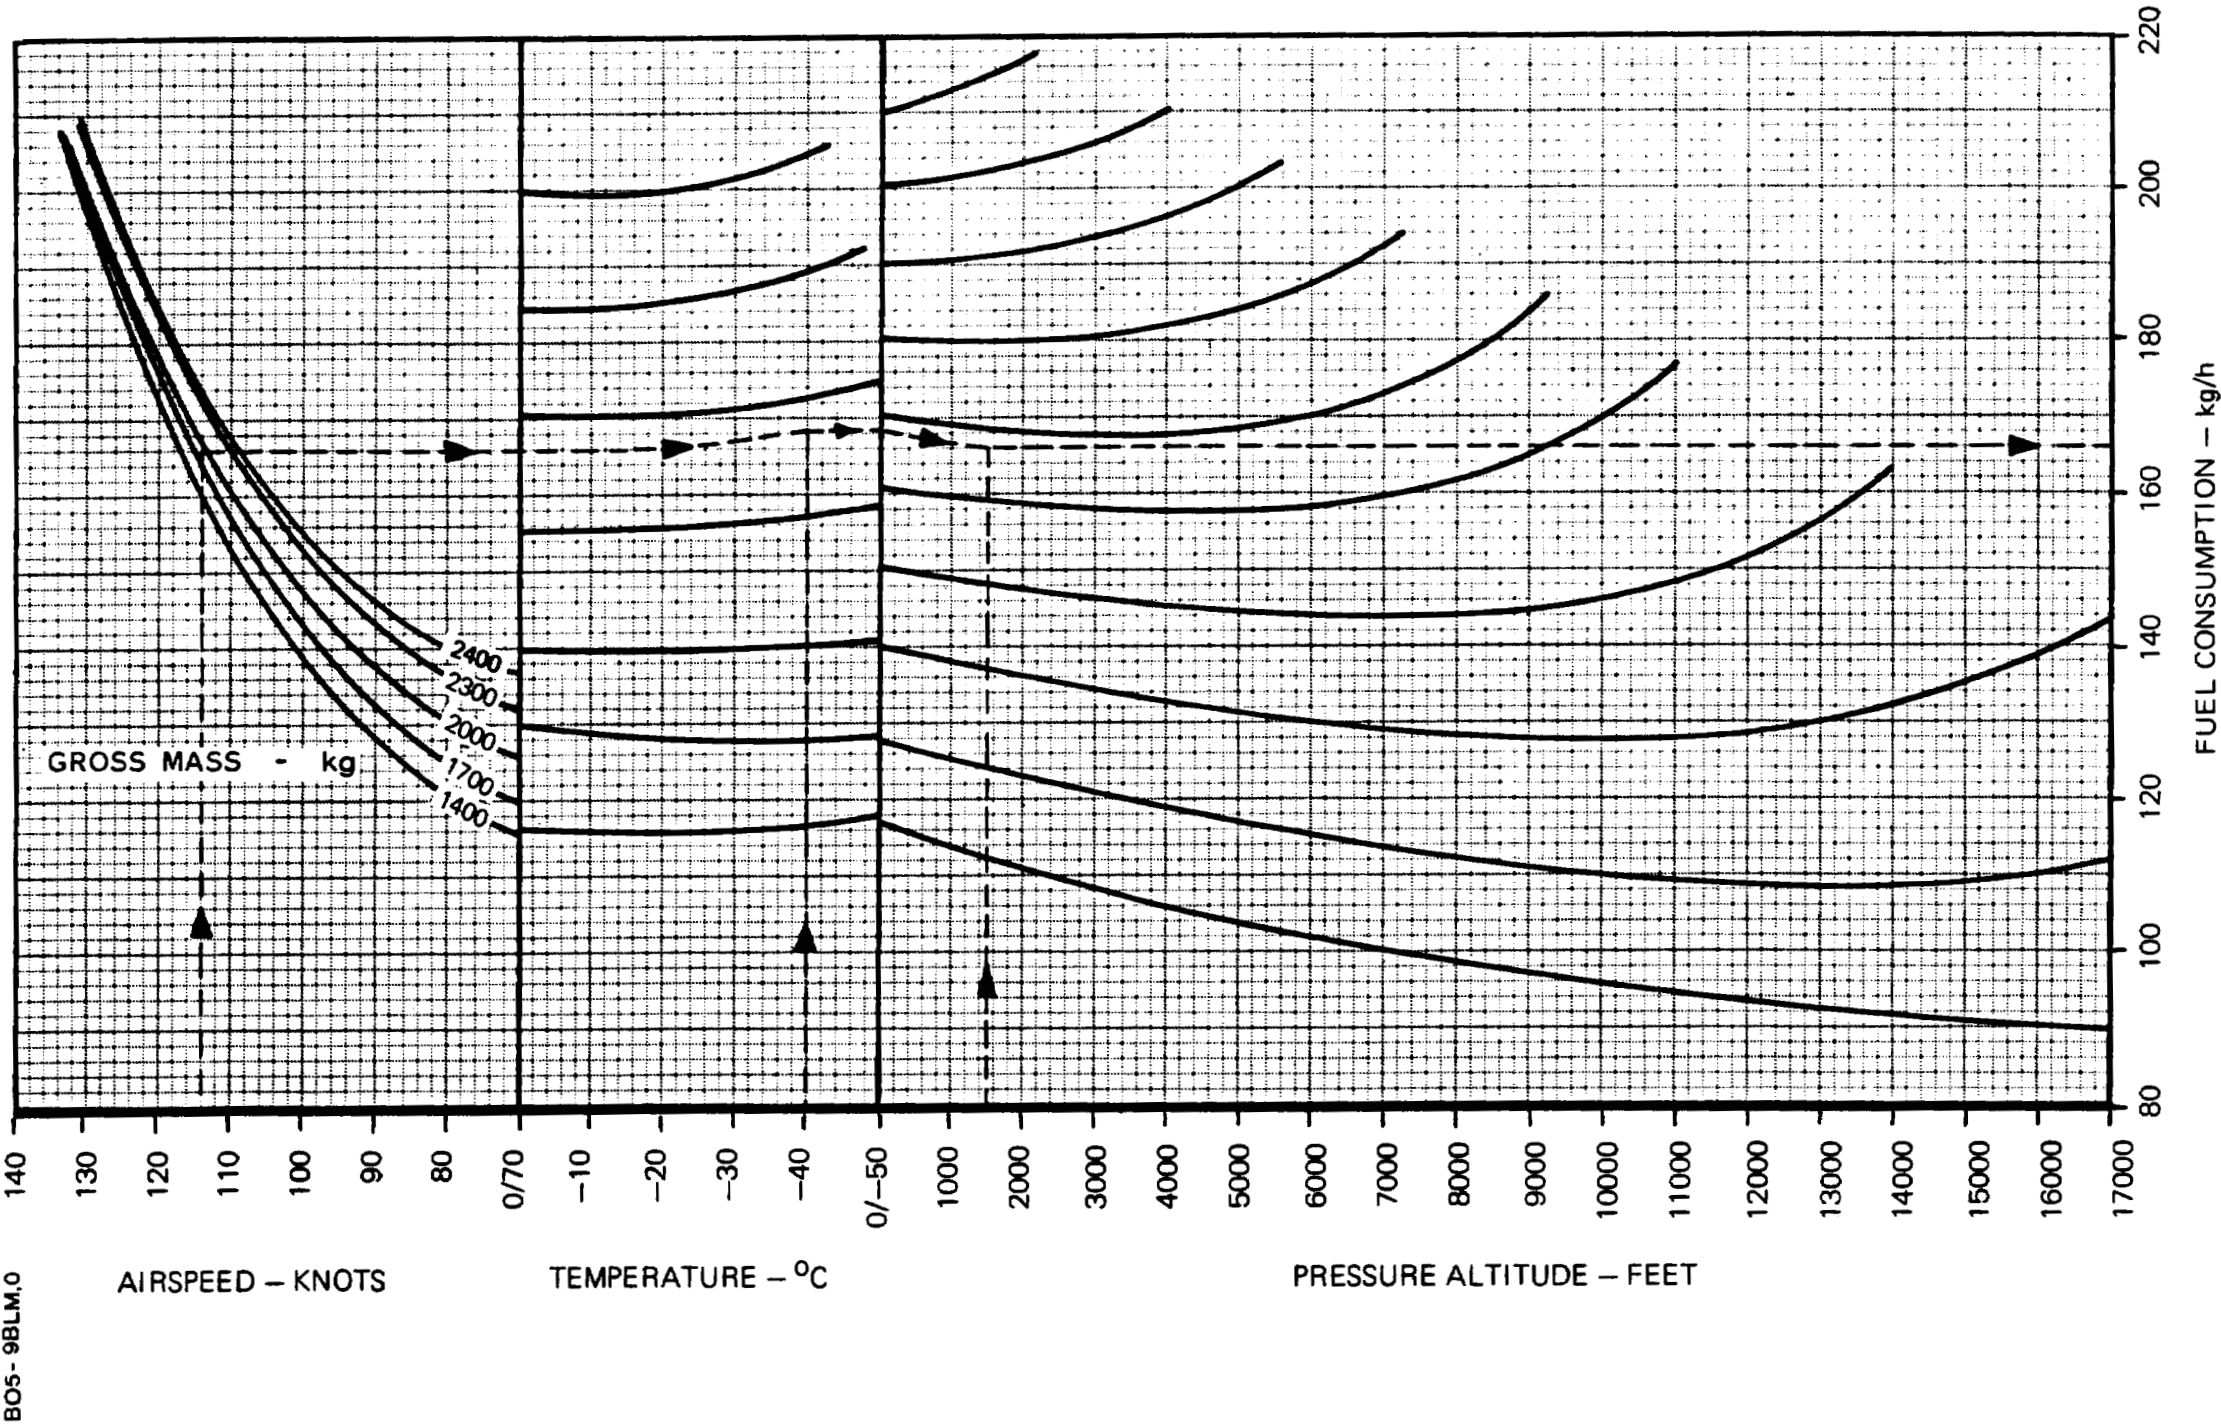


Fig. 9-6 Fuel Consumption - Cruise Flight, Above 70 KIAS, -50 to 0 °C

OEI FUEL CONSUMPTION

CRUISE FLIGHT, 0-90 KIAS

1 X ALLISON 250-C20B

OAT RANGE: -50 TO +10 °C

ANTI-ICING - ON

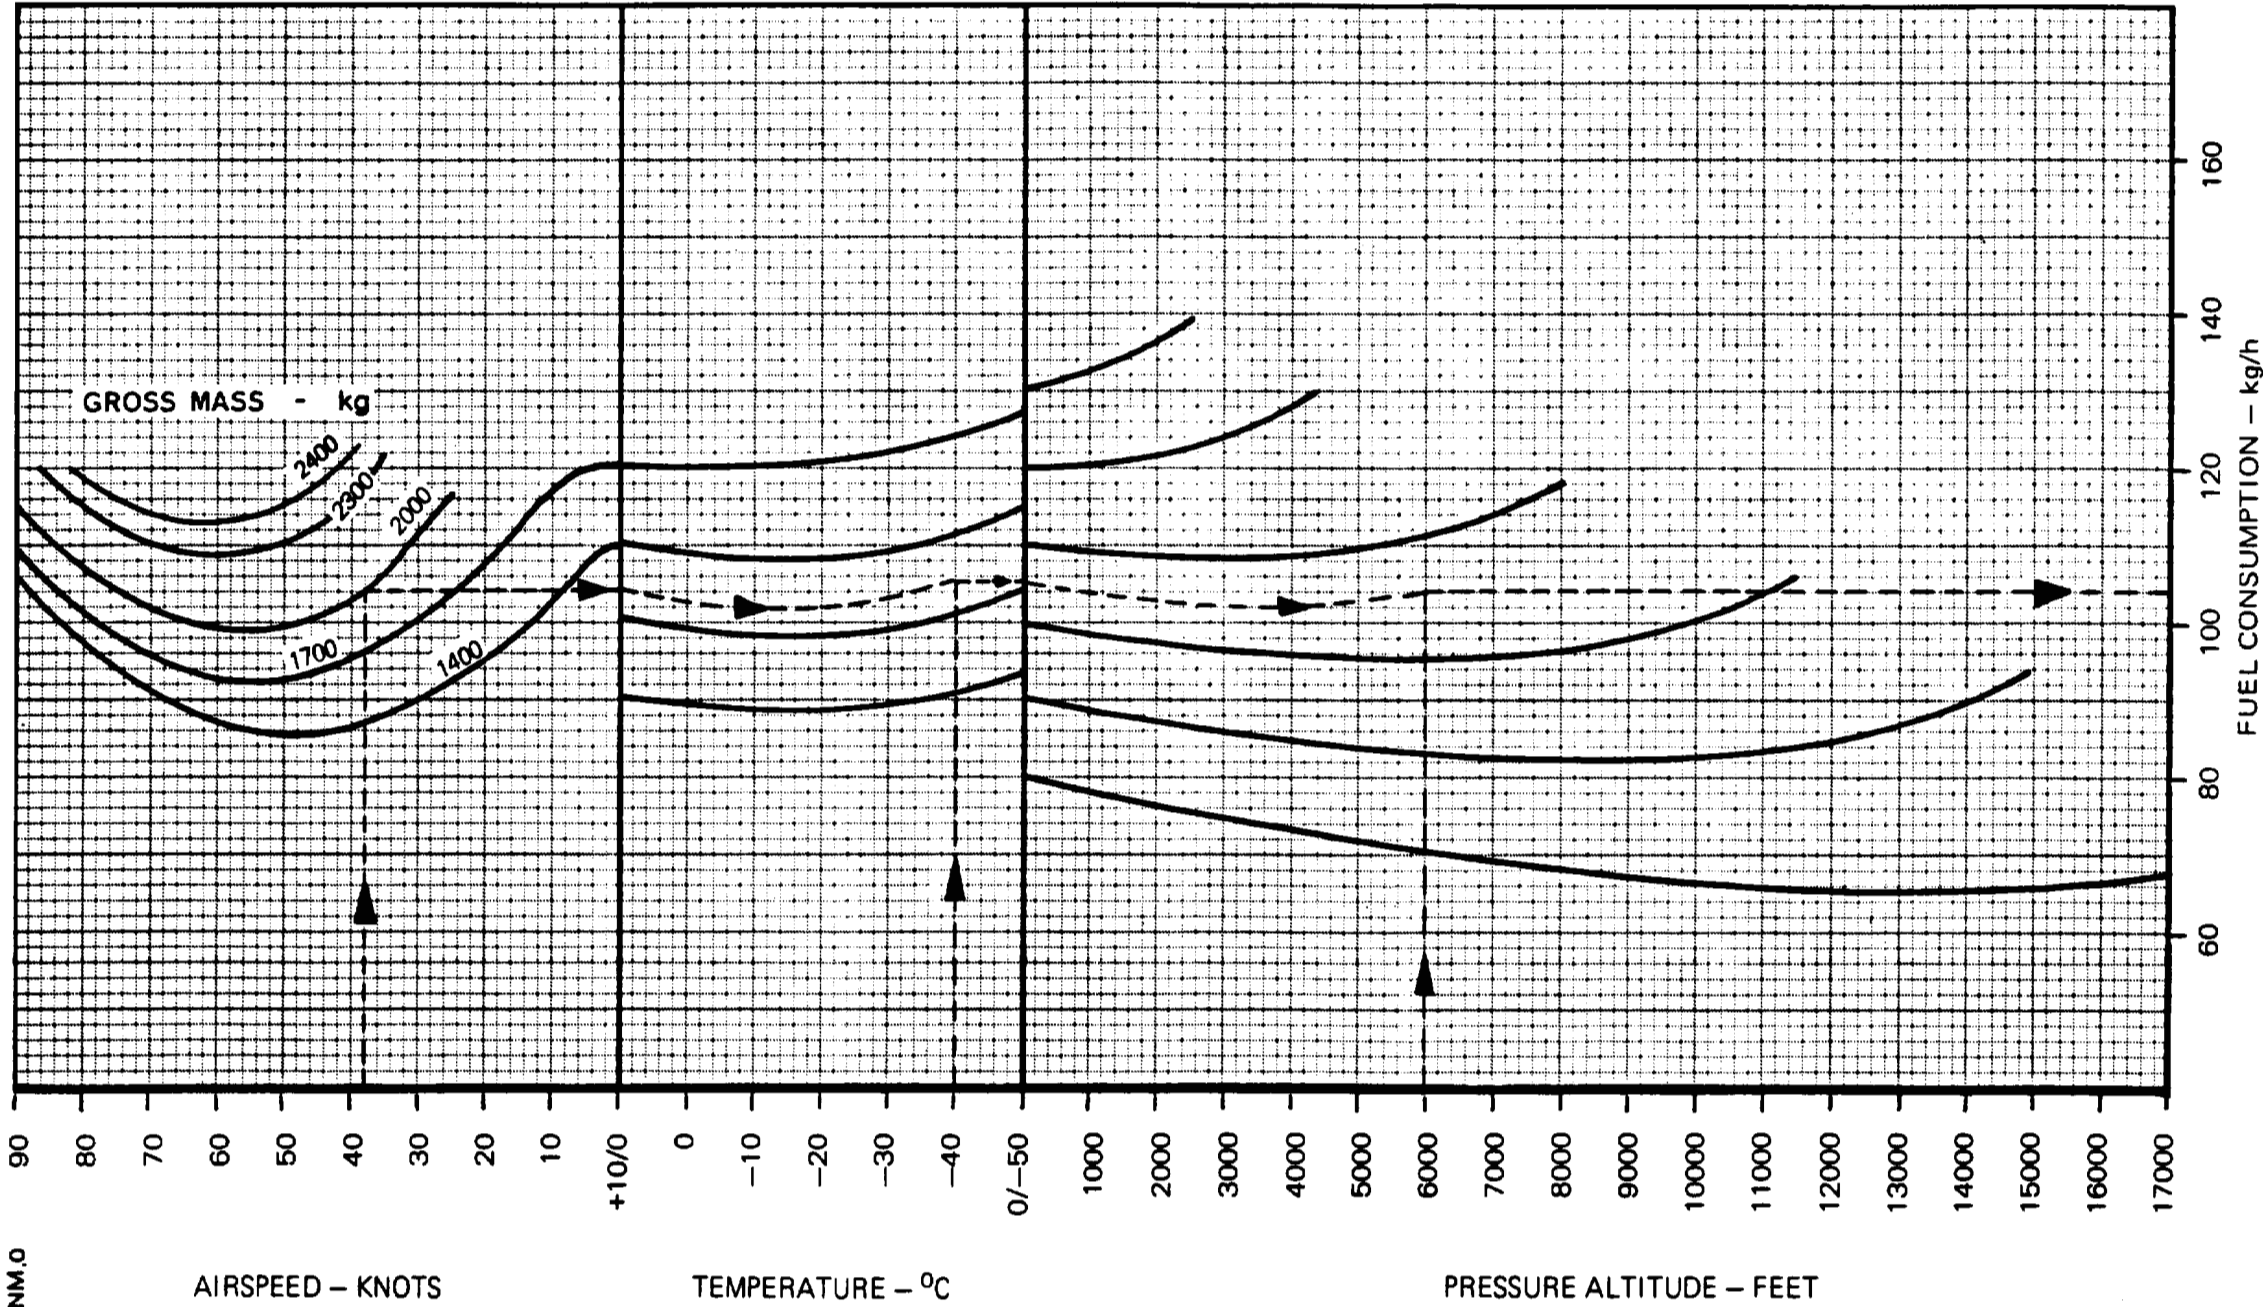


Fig. 9-7 OEI Fuel Consumption - Cruise Flight, 0-90 KIAS, Anti-icing ON

OEI FUEL CONSUMPTION

CRUISE FLIGHT, 0-90 KIAS

1 X ALLISON 250-C20B

OAT RANGE: 0 TO +50 °C

ANTI-ICING – OFF

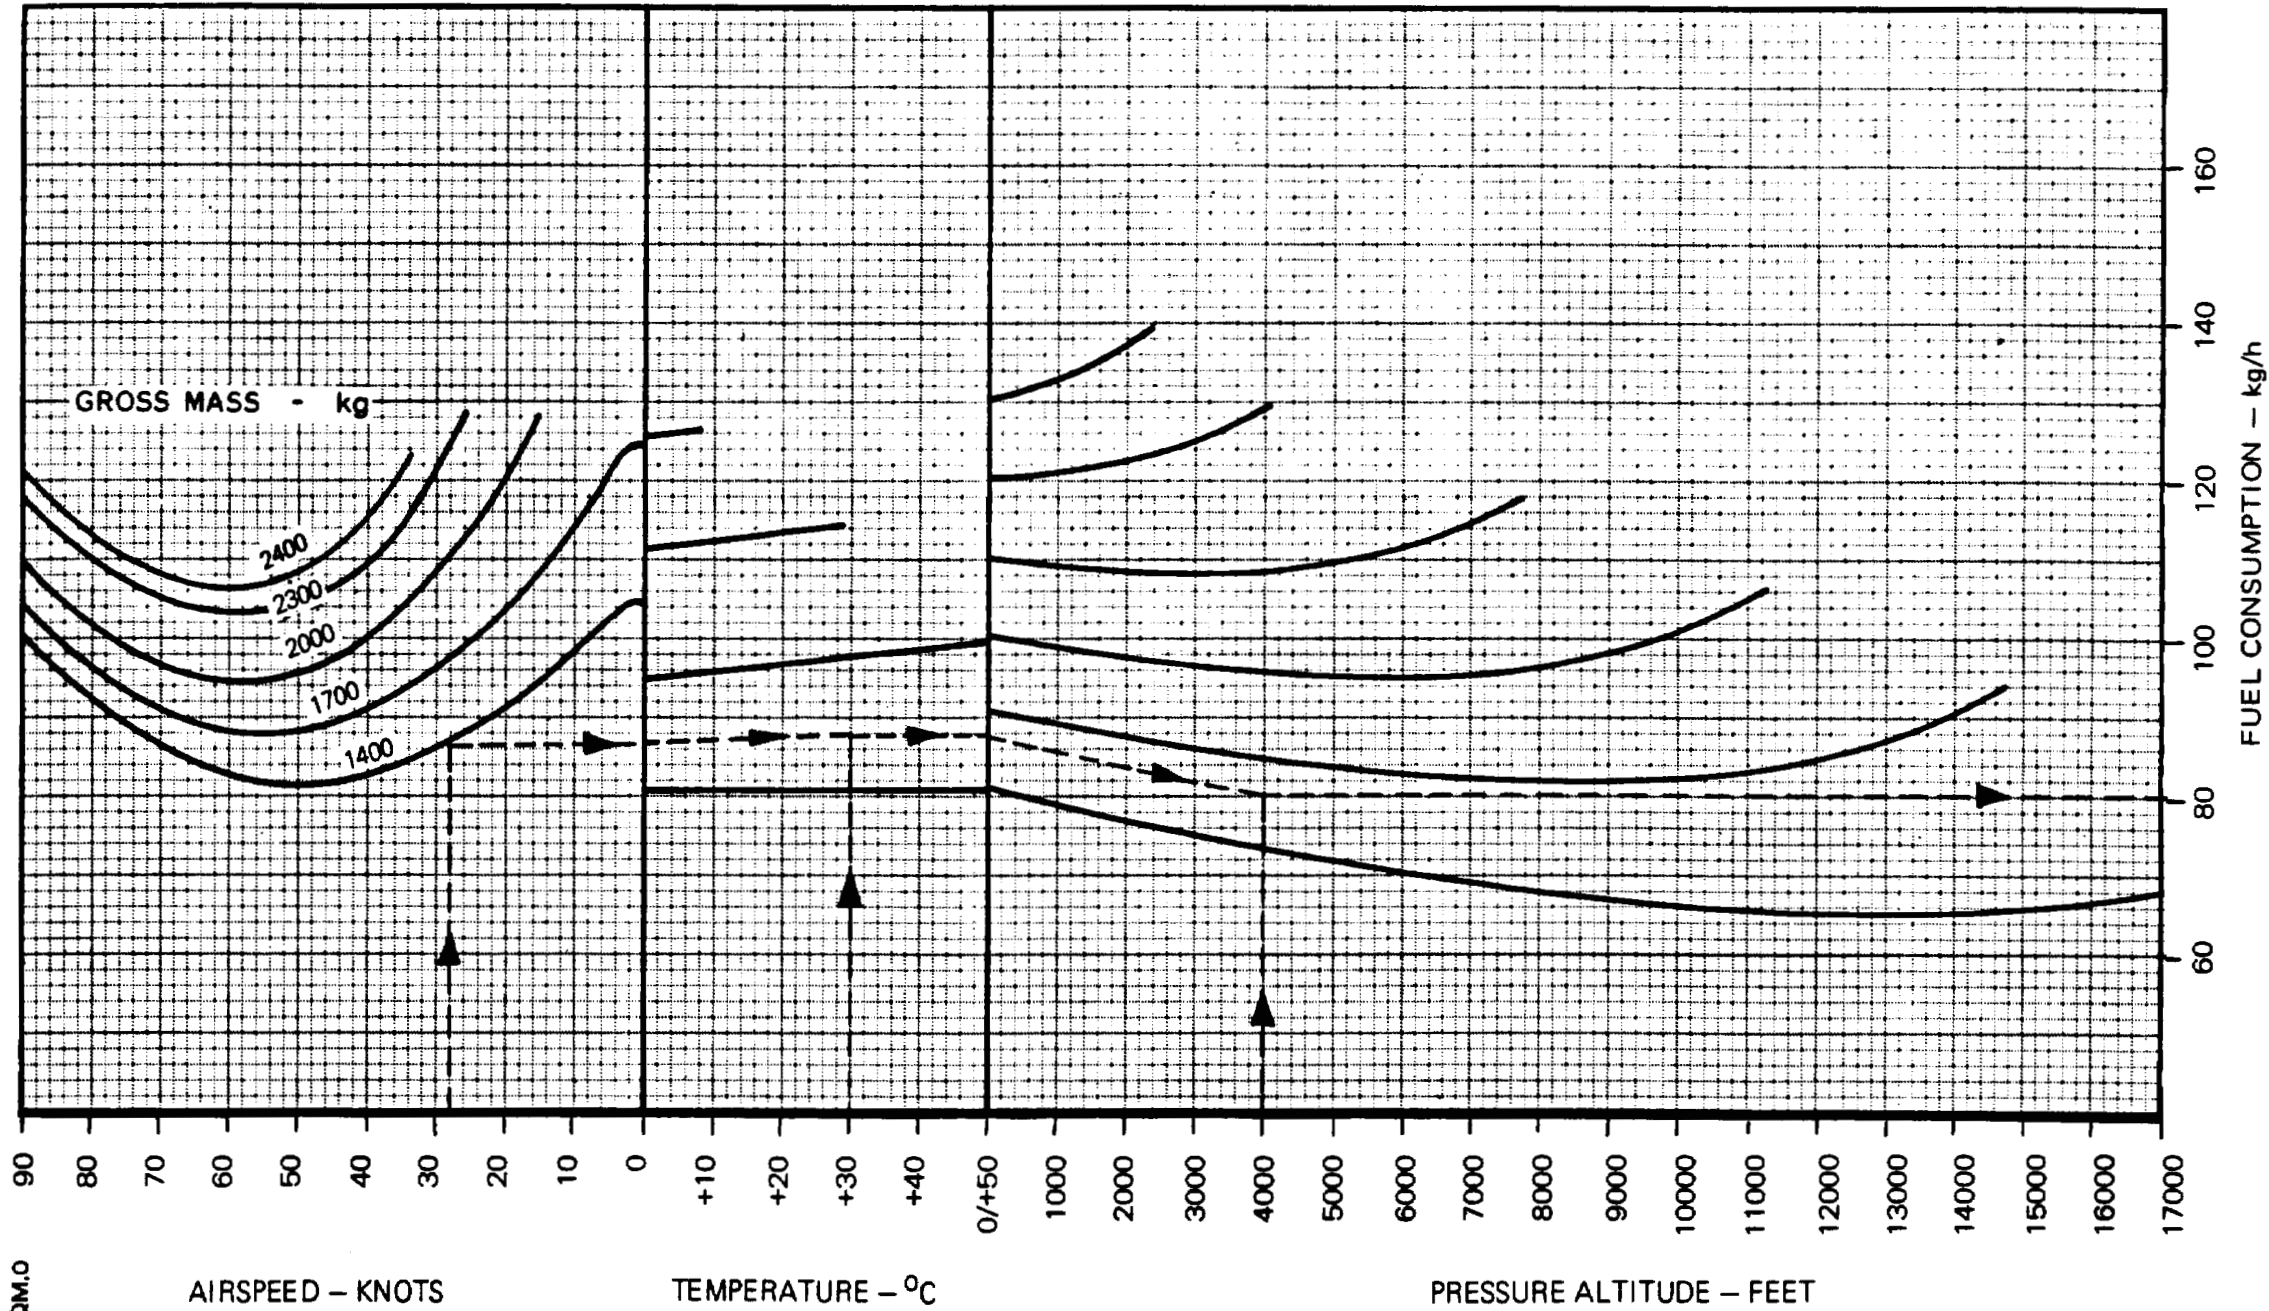


Fig. 9-8 OEI Fuel Consumption - Cruise Flight, 0-90 KIAS, 0 to +50 °C

OEI FUEL CONSUMPTION

CRUISE FLIGHT, 0-90 KIAS

1 X ALLISON 250-C20B

OAT RANGE: -50 TO 0 °C

ANTI-ICING – OFF

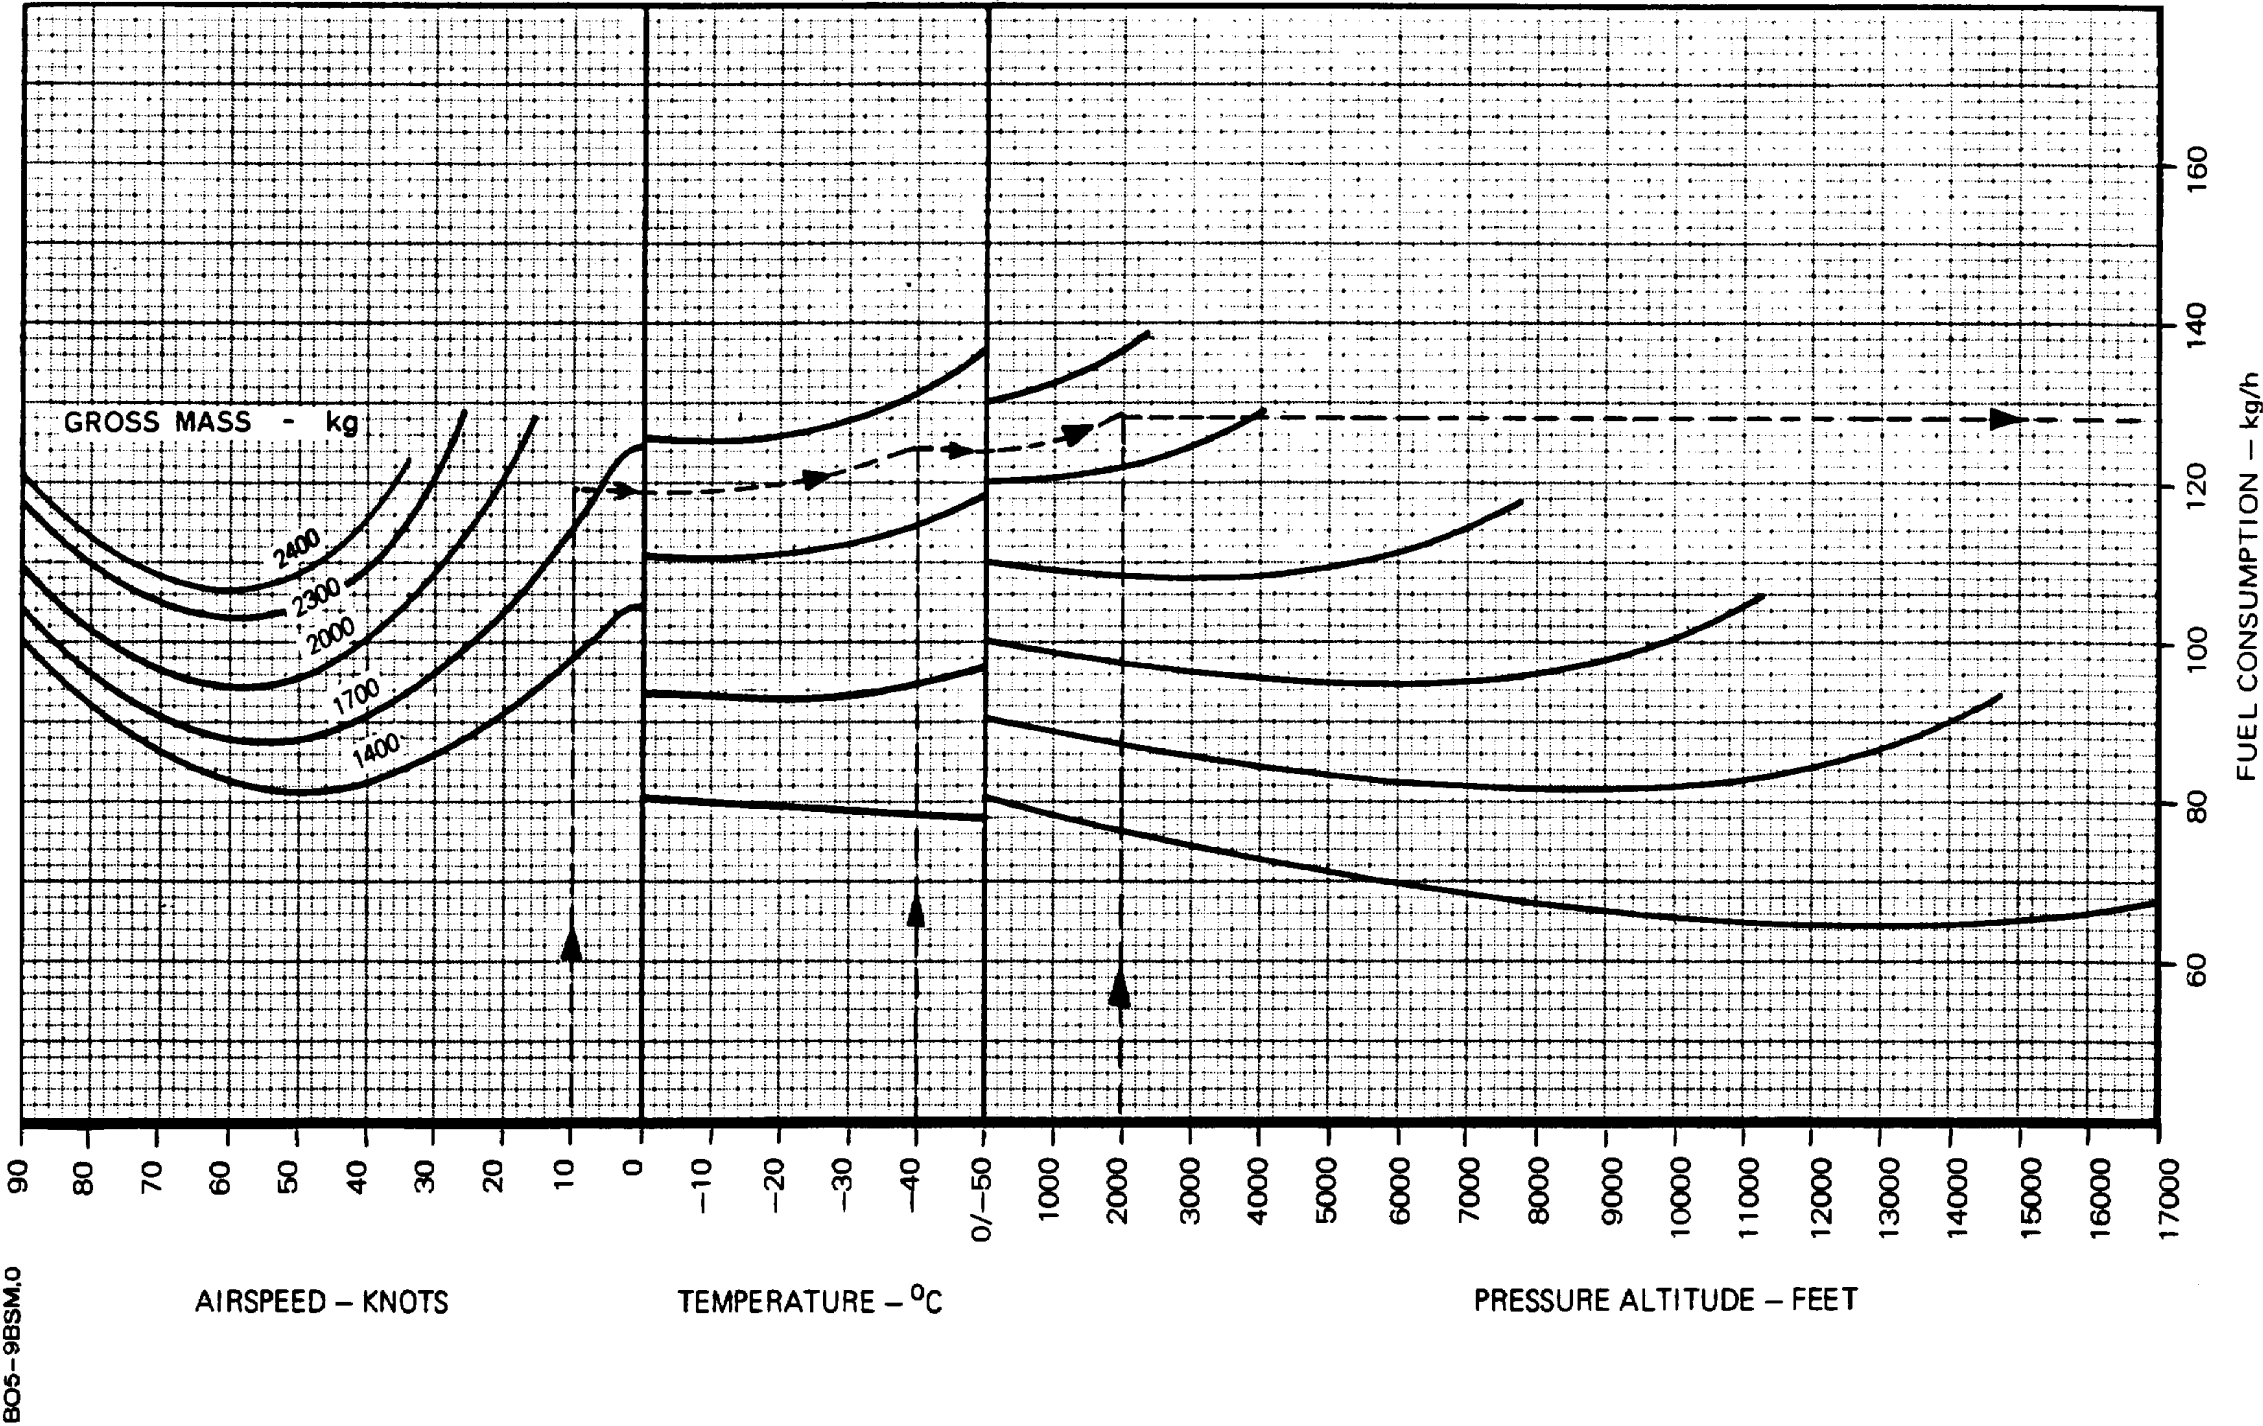


Fig. 9-9 OEI Fuel Consumption - Cruise Flight, 0-90 KIAS, -50 to 0 °C

