

9.3 MAXIMUM RANGE

The maximum range diagrams (see Fig. 9-10 and 9-11) are based on the following conditions:

- International Standard Atmosphere (ISA)
- Usable fuel - 456 kg (no reserve)
- Level flight (no climb, descent, or other maneuver)
- Engine anti-icing - OFF

NOTE With anti-icing ON, the maximum range will be reduced.

For range calculations at altitudes and fuel loads other than those presented in the diagrams, determine true airspeed ($IAS \times \frac{1}{\sqrt{\sigma}}$), fuel consumption and present fuel quantity.

Calculate range using the formula:

$$\text{Range} = \frac{\text{TAS} \times \text{Fuel Quantity}}{\text{Fuel Consumption}}$$

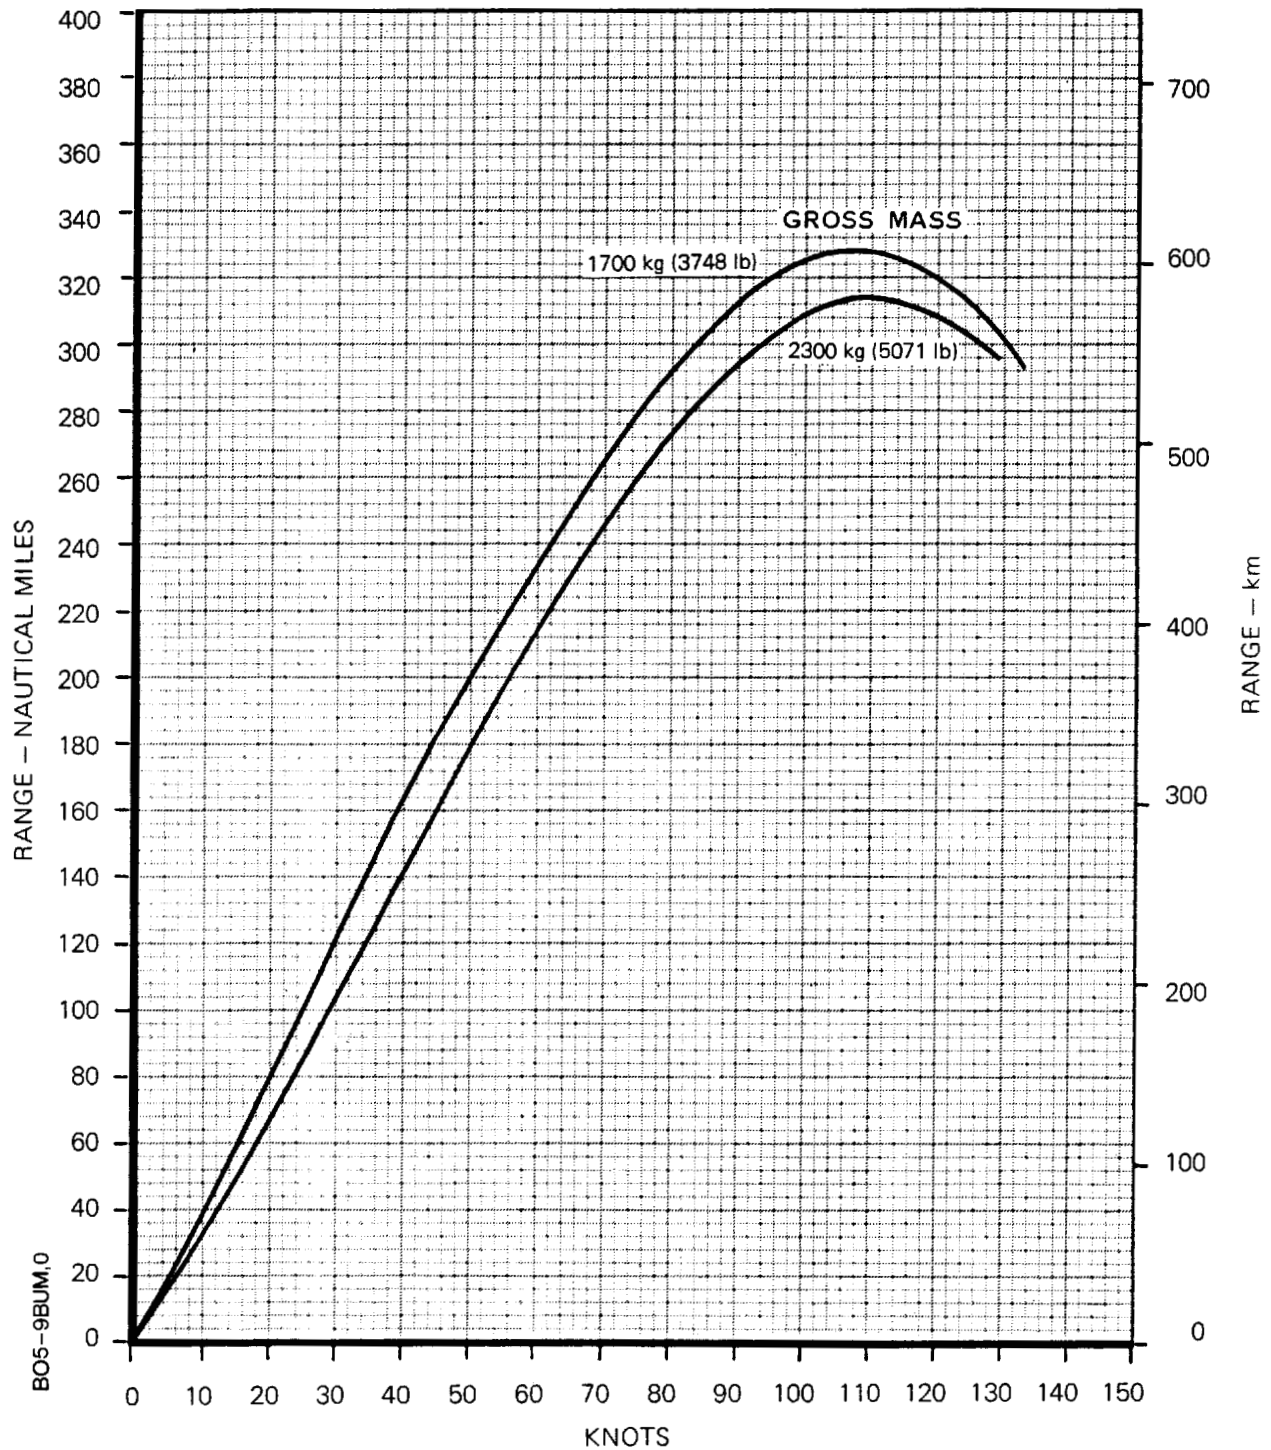
MAXIMUM RANGE**PRESSURE ALTITUDE - ISA SEA LEVEL****2 X ALLISON 250-C20B****FUEL – 456 KG, NO RESERVE****ANTI-ICING – OFF**

Fig. 9-10 Maximum Range - ISA Sea Level

MANUFACTURER'S DATA

MAXIMUM RANGE

PRESSURE ALTITUDE - ISA 5000 FT

2 X ALLISON 250-C20B

FUEL – 456 KG, NO RESERVE

ANTI-ICING – OFF

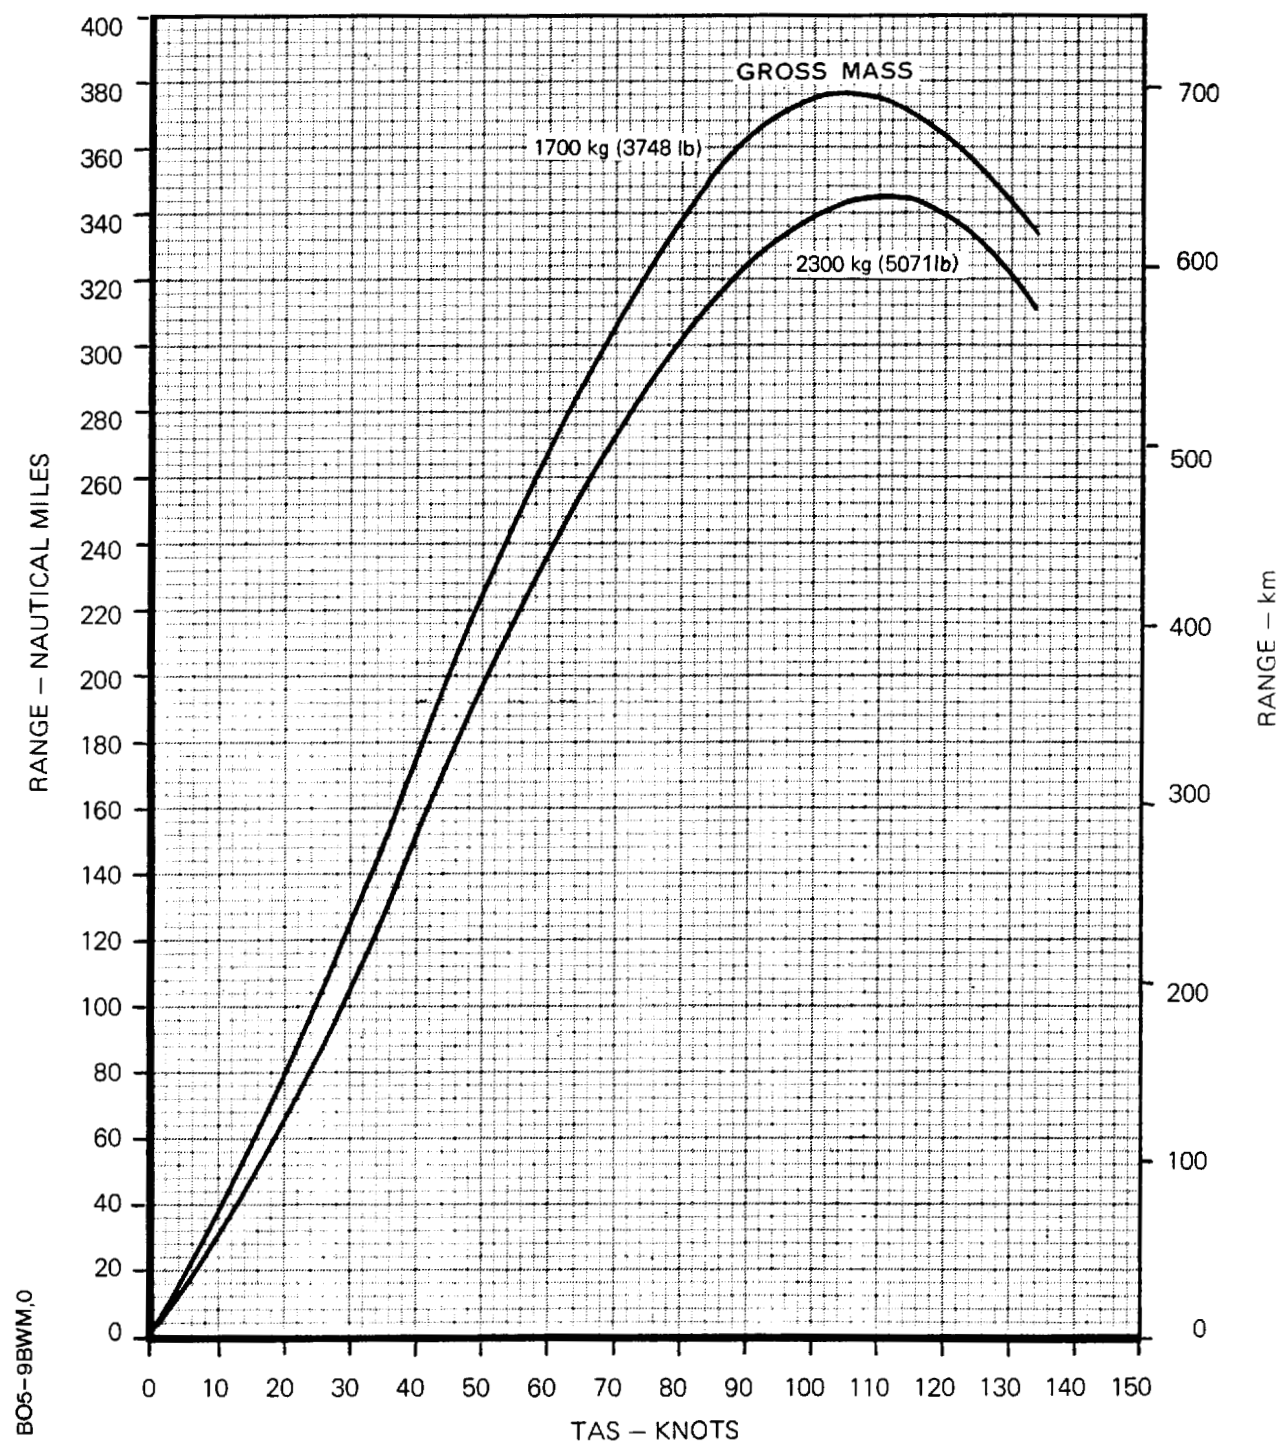


Fig. 9-11 Maximum Range - ISA 5000 ft