

9.6 OEI MASS/ALTITUDE/TEMPERATURE

The one-engine inoperative mass/altitude/temperature diagrams (see Fig. 9-16 and 9-17) are based on having a climb reserve of 50 and 150 fpm at a height of 1000 ft above the takeoff field-elevation and at the best rate-of-climb speed of 60 KIAS.

OEI MASS/ALTITUDE/TEMPERATURE**50-FPM CLIMB RESERVE**

1 X ALLISON 250-C20B

OEI – EMERGENCY POWER (810 °C TOT, 95% TORQUE)

ANTI-ICING – OFF

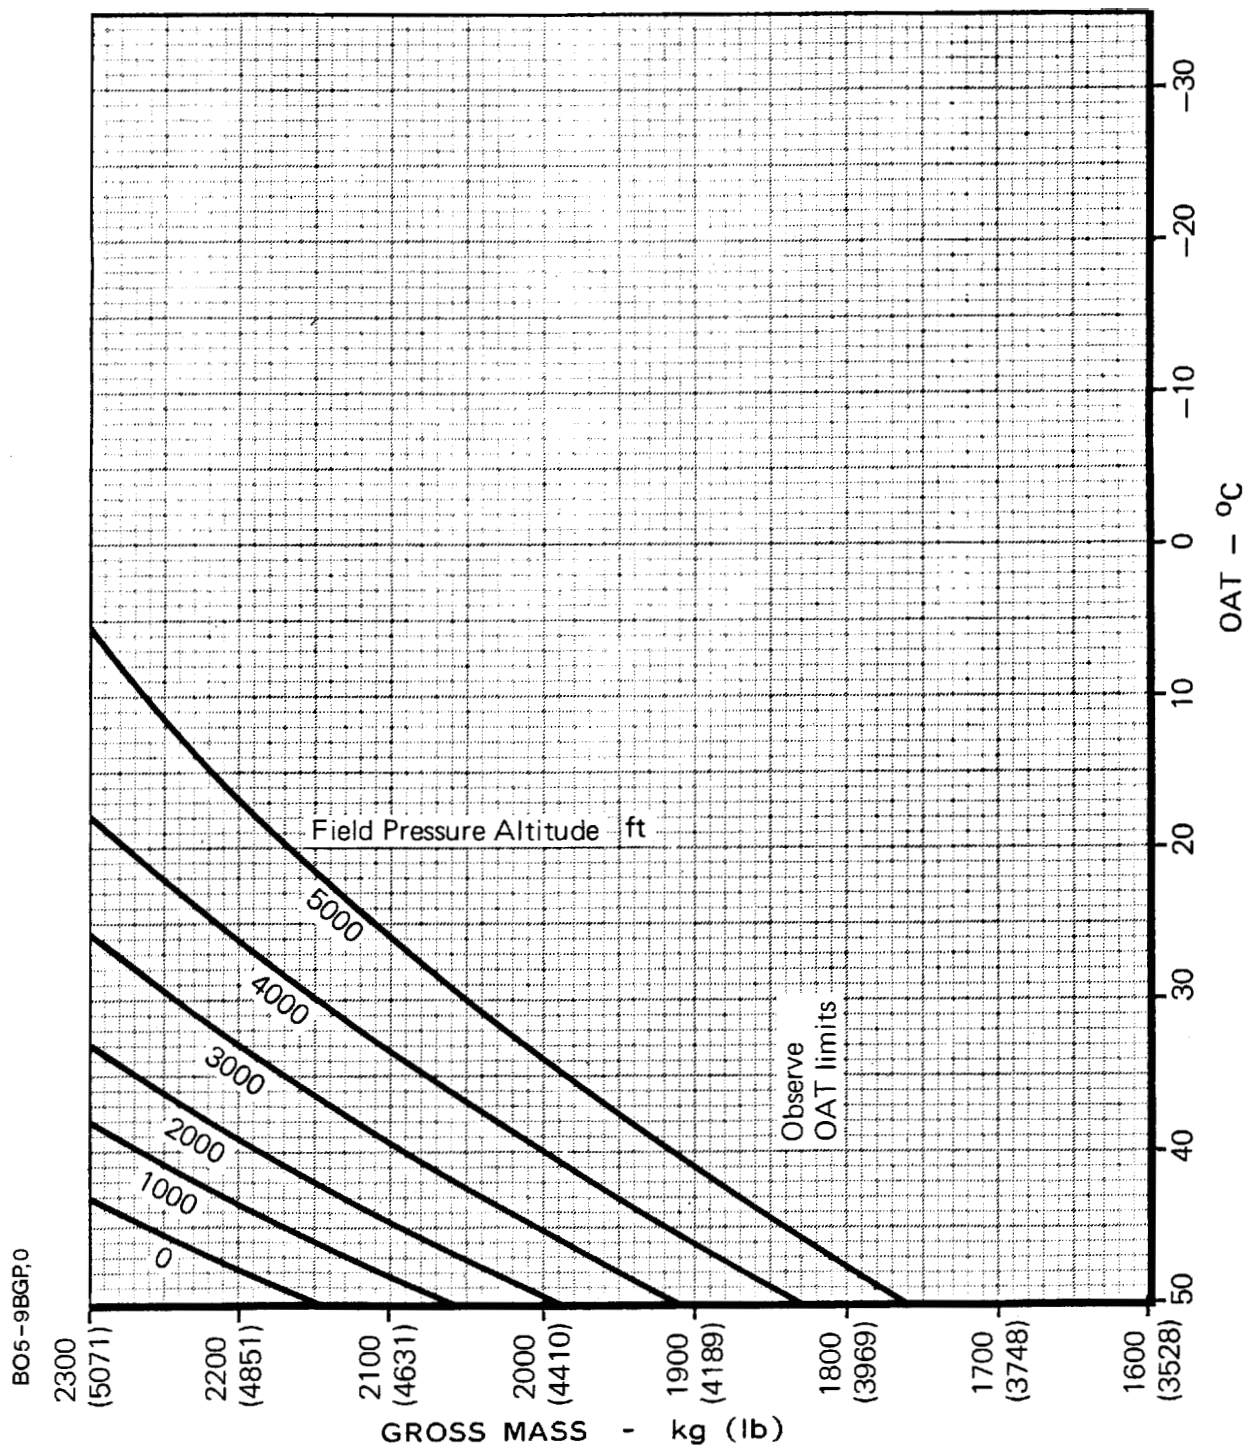


Fig. 9-16 OEI Mass/Altitude/Temperature - 50-fpm Climb Reserve

OEI MASS/ALTITUDE/TEMPERATURE**150-FPM CLIMB RESERVE**

1 X ALLISON 250-C20B

OEI – EMERGENCY POWER (810 °C TOT, 95% TORQUE)

ANTI-ICING – OFF

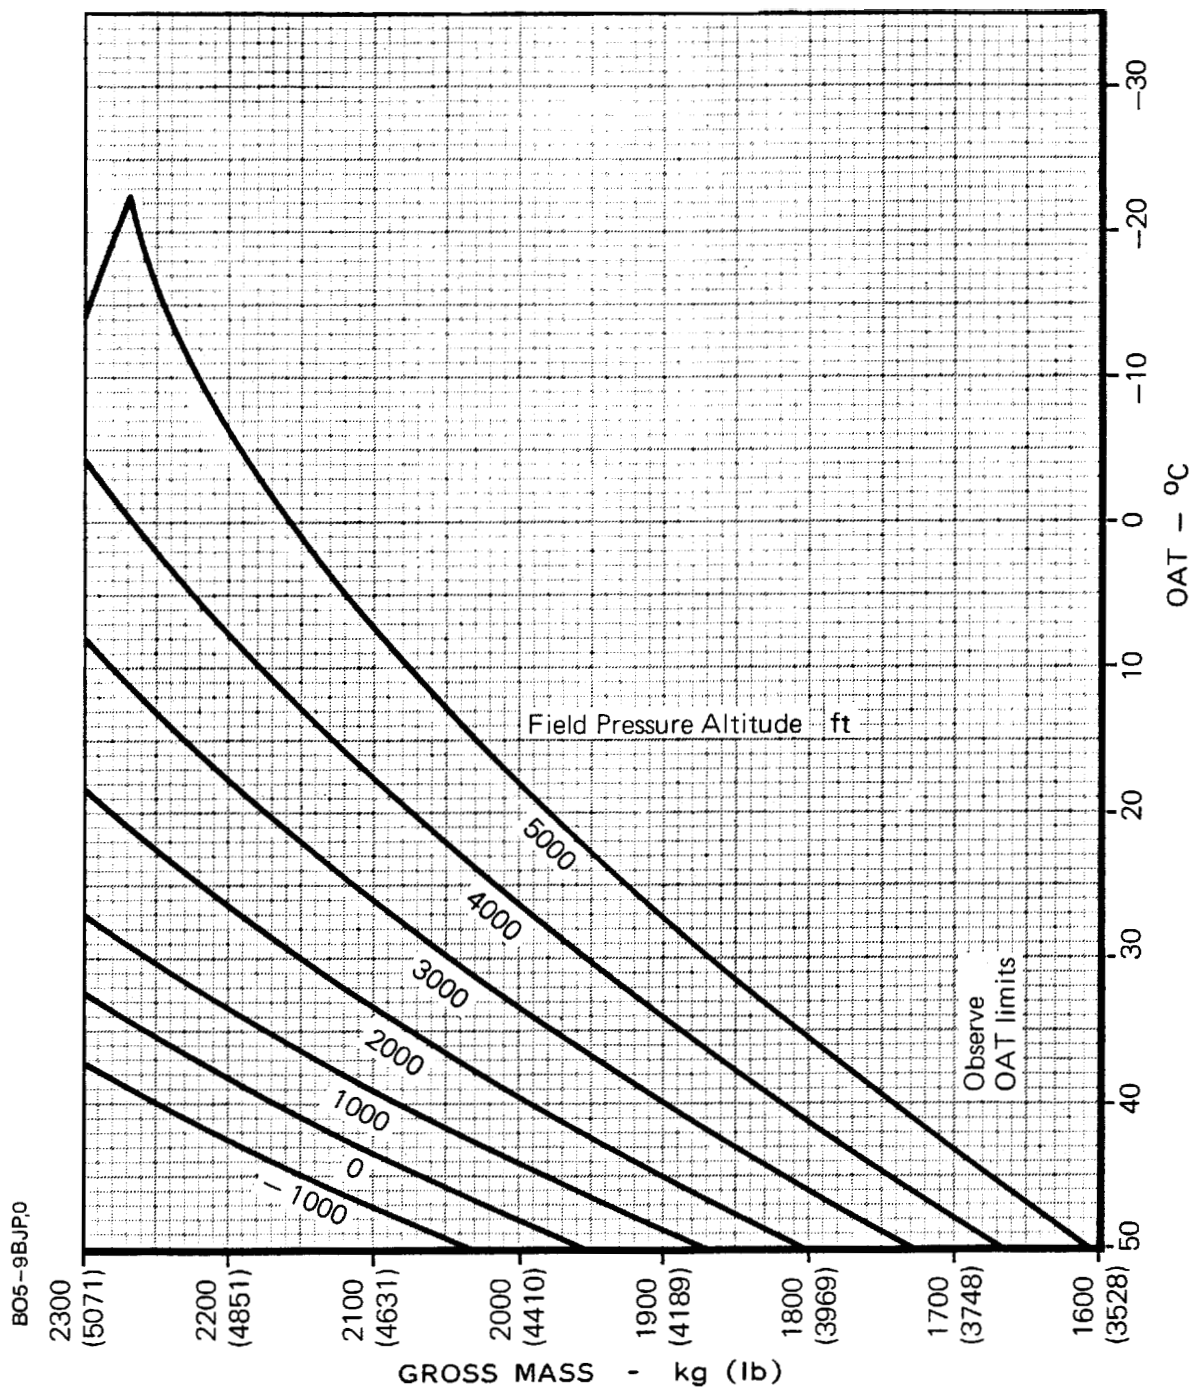


Fig. 9-17 OEI Mass/Altitude/Temperature - 150-fpm Climb Reserve