

Paper Title

1st Petr Lavrenov
Hochschule Hamm-Lippstadt
Lippstadt, Germany
petr.lavrenov@stud.hshl.de

2nd Oleg Kelner
Hochschule Hamm-Lippstadt
Lippstadt, Germany
oleg.kelner@stud.hshl.de

3rd John Abah
Hochschule Hamm-Lippstadt
Lippstadt, Germany
john.abah@stud.hshl.de

4th Hany Chowdhury
Hochschule Hamm-Lippstadt
Lippstadt, Germany
hany.chowdhury@stud.hshl.de

Abstract—This paper provides a concise placeholder abstract for the seminar topic. It should summarize the motivation, method, central result, and relevance of the work in approximately 150 to 250 words.

Index Terms—Power line communication,

I. POWERLINE COMMUNICATION OVERVIEW

A. Introduction

Power line communication (PLC) has been an attractive idea since the early development of carrier communication systems in the 1920s. Its appeal is straightforward: many devices and locations that require communication are already connected to the electrical power network. If the existing conductors can also be used as a communication medium, the need for separate signal wiring can be reduced or avoided.

At the same time, PLC has never been a universally convenient communication technology. Even during the development of early carrier telephony systems, and even more so today in the presence of many wired and wireless alternatives, PLC has had to deal with a number of non-trivial challenges. Power lines are not designed as communication channels. Their electrical characteristics vary with topology, connected loads, switching operations, transformers, and environmental conditions. In addition, any equipment connected to power conductors must be designed with strong attention to safety, reliability, and electromagnetic compatibility. These constraints make PLC less attractive in some situations, especially where dedicated communication infrastructure or wireless links are easier to deploy.

This paper gives a general overview of PLC technology. It first explains the basic operating principle, then discusses the main technical and practical challenges, and finally presents selected applications in which PLC remains useful.

B. General Technology Overview

The basic idea of PLC is to transmit information over conductors that are already used for electrical power delivery. In a typical power system, the mains voltage is carried as a low-frequency sinusoidal waveform, for example at approximately 50 Hz in many European countries. A PLC system adds an additional communication signal to this existing power waveform. This process is commonly described as superimposing the communication signal onto the power line.

In simplified form, the line therefore carries two components at the same time: the low-frequency power signal and a higher-frequency information signal. The communication

signal must be chosen so that it can be distinguished from the power waveform and from strong power-frequency harmonics. At the receiving side, filtering and coupling circuits are used to separate the communication component from the power component. The principle is shown schematically in Fig. 1, which uses a simplified PLC transmitter and receiver structure as a backbone for the explanation [1].

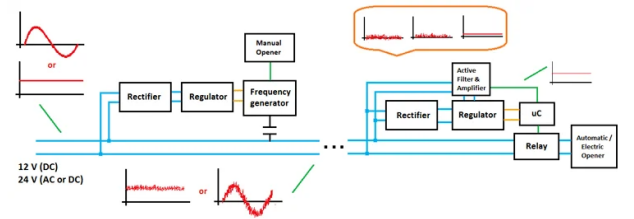


Fig. 1. Simplified principle of power line communication [1]. A communication signal is superimposed onto the power line and later recovered by filtering and receiver circuitry.

The separation of useful and unwanted frequency components is one of the central technical ideas behind such systems. Early filter theory already described pass bands and stop bands as a way to allow certain frequency ranges to pass while attenuating others [2]. In the context of PLC, this principle is used to couple a communication signal onto the power conductor and to recover it again without directly treating the power waveform itself as the information signal.

C. Challenges of PLC

The same feature that makes PLC attractive also creates many of its difficulties. The power grid already exists, but it was built for energy delivery rather than communication. This means that the transmission medium is shared with loads, switching equipment, transformers, and other apparatus that can change the electrical behavior of the line.

In their discussion of the M1 carrier telephone system for high-voltage power lines, Wolfe and his co-authors identified three major development problems. First, it was necessary to understand the high-frequency behavior of power lines and associated equipment in close cooperation with power companies. Second, a safe and efficient method had to be developed for coupling the carrier equipment to high-voltage conductors. Only after these problems had been addressed could the actual communication circuits and equipment be selected and developed [3].

This order is important. The main difficulty was not simply the design of a telephone circuit. The system first had to operate on a transmission medium with unfamiliar and varying high-frequency properties, and it had to do so while remaining safe for operating personnel. In other words, PLC development required both communication engineering and practical adaptation to the existing power infrastructure.

Modern PLC systems still face similar categories of problems. Although the electronics have changed, the basic medium remains the power network. The line impedance may vary, noise may be introduced by connected devices, and the communication signal may be attenuated or distorted by the structure of the network. In addition, modern systems must also satisfy electromagnetic emission regulations. In Europe, for example, low-voltage signalling in the frequency range from 3 kHz to 148.5 kHz is regulated by standards such as EN 50065-1 [4].

For this reason, PLC can be understood as a niche technology rather than a universal replacement for dedicated communication systems. Its value is highest in situations where the power line is already the most practical or economical available infrastructure. In rural areas, remote installations, utility control systems, or locations where separate communication wiring would be expensive, PLC can provide a useful communication channel with comparatively low additional infrastructure cost. Early carrier systems already emphasized this advantage: by using existing power conductors, communication service could be provided without constructing an entirely separate line network [3].

The following sections therefore consider PLC not as a perfect communication medium, but as a practical engineering compromise. Its limitations are significant, but in suitable applications the ability to reuse existing power infrastructure can outweigh those limitations.

II. HOME APPLICATIONS

The widespread availability of electrical wiring in residential buildings makes Power Line Communication (PLC) an attractive technology for home networking applications. Unlike industrial environments, residential systems generally require lower communication bandwidth and operate over shorter transmission distances. By utilizing existing electrical infrastructure as a communication medium, PLC eliminates the need for additional Ethernet cabling and reduces deployment costs. Consequently, PLC has emerged as a practical solution for internet distribution, multimedia streaming, home automation, and residential energy management systems.

PLC is particularly beneficial in buildings where conventional networking solutions face practical limitations. Wireless communication may suffer from attenuation caused by thick walls, reinforced concrete structures, or multiple floors, while installing dedicated Ethernet cables can be costly and disruptive. In such situations, PLC provides an alternative communication path by leveraging electrical wiring that is already available throughout the building. This ability to reuse existing infrastructure has contributed significantly to

the continued adoption of PLC technologies in residential environments [5].

A. Residential PLC Network Architecture

Power Line Communication (PLC) enables the transmission of data through electrical wiring that is already installed within residential buildings. Instead of relying on dedicated communication cables, PLC systems use existing power conductors to carry both electrical power and communication signals simultaneously. This approach simplifies network deployment and provides a cost-effective alternative in situations where installing Ethernet cables would be expensive or impractical [5].

In a typical residential PLC network, a PLC adapter is connected to an internet router and plugged into a wall outlet. The adapter injects a high-frequency communication signal onto the electrical wiring while the conventional low-frequency power signal continues to provide electrical energy. Additional PLC adapters located in other rooms receive the transmitted signal and provide network access to connected devices such as personal computers, smart televisions, gaming consoles, and smart home controllers.

As illustrated in Fig. 2, data is transmitted from the router through a PLC adapter and distributed across the residential power line network to various household devices. The communication process relies on coupling and filtering circuits that enable communication signals to coexist with power-frequency signals on the same conductors. At the receiving end, filtering mechanisms separate the communication signal from the power signal, allowing reliable data transmission over the existing electrical infrastructure [5].

Residential PLC networks offer a significant practical advantage because electrical outlets are already distributed throughout the building. As a result, communication services can often be extended to additional rooms without major infrastructure modifications. This characteristic makes PLC particularly suitable for retrofitting older buildings where installing new communication cables may be technically difficult or economically unjustified.

B. Home Internet Distribution

One of the most common residential applications of PLC is the distribution of internet connectivity throughout a home. Modern households frequently contain multiple internet-connected devices operating simultaneously, including desktop computers, laptops, smart televisions, gaming consoles, and media streaming platforms. Maintaining reliable connectivity for all of these devices can be challenging when wireless coverage is inconsistent or when signal strength is reduced by structural obstacles.

PLC addresses this issue by transmitting network traffic through the existing electrical network. A typical deployment consists of a PLC adapter connected to the router and one or more receiving adapters positioned near user devices. This arrangement allows internet access to be extended to remote rooms without requiring additional Ethernet cabling. The technology is particularly useful for applications requiring

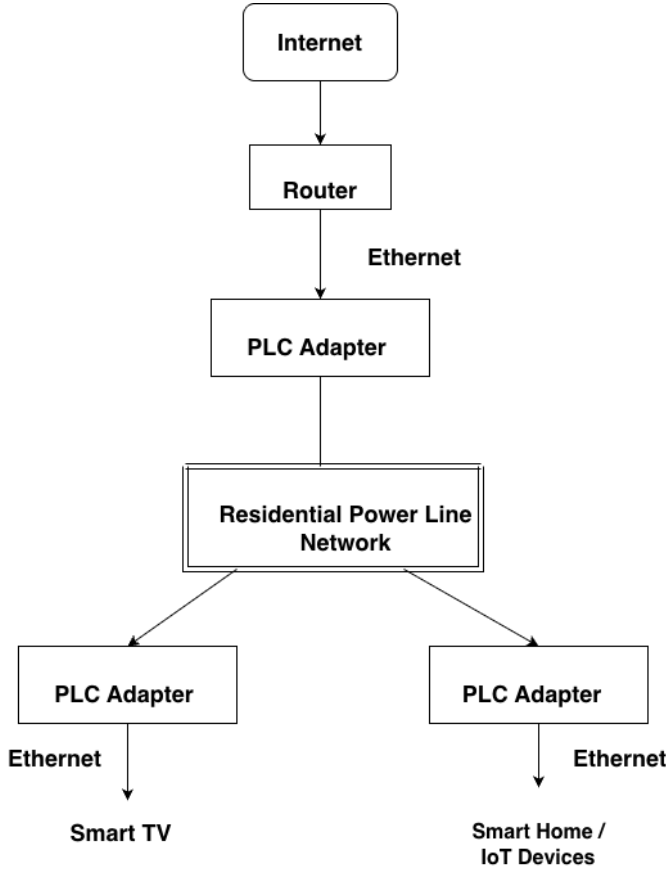


Fig. 2. Typical residential PLC network architecture showing communication between a router and household devices through the residential power line network, based on the communication principle described in [5].

stable connections and relatively high data rates, such as video streaming, online gaming, and multimedia content distribution.

Furthermore, PLC can operate alongside wireless networks, creating a hybrid communication environment that improves overall network coverage and flexibility. In many residential installations, PLC is used to complement Wi-Fi by providing a reliable backbone connection between different areas of the building.

C. Smart Home and IoT Integration

The increasing adoption of smart-home technologies has created a growing demand for reliable communication between sensors, controllers, and household appliances. Smart lighting systems, automated heating and cooling controllers, security cameras, intelligent power outlets, and energy-monitoring devices all require continuous data exchange across the home network.

PLC provides a communication backbone that can complement or replace wireless connections in situations where radio coverage is unreliable. Since many smart devices are already connected to the electrical network, PLC offers a convenient communication medium that can be deployed with minimal

installation effort. The availability of electrical outlets throughout residential buildings further simplifies the integration of new devices into existing smart-home ecosystems.

In addition, PLC technology supports residential energy management and monitoring applications. Smart meters, energy-monitoring systems, and connected household devices can exchange information through the power network, enabling more efficient use of energy resources. These capabilities demonstrate the relevance of PLC in modern smart-home environments and support its continued development within residential communication systems [6].

D. Advantages and Challenges

The primary advantage of PLC technology is the reuse of existing infrastructure. Since power wiring is already installed throughout residential buildings, deployment costs are significantly lower than those associated with dedicated communication cabling. Installation is straightforward and generally requires only the connection of PLC adapters to existing wall outlets. Consequently, PLC provides an accessible networking solution for users who may not possess advanced technical expertise.

Despite these advantages, PLC faces several technical challenges. Residential power networks were designed for electrical energy distribution rather than communication. Household appliances such as computers, televisions, microwave ovens, light dimmers, and electric motors generate electrical noise that may interfere with communication signals [5]. In addition, signal attenuation depends on cable length, wiring topology, and the number of connected electrical loads.

Furthermore, Zimmermann and Dostert demonstrated that multipath propagation and signal reflections within residential wiring networks can create frequency-selective channel conditions that affect communication performance [7]. These effects may reduce signal quality and limit achievable data rates. Older electrical installations may also introduce additional attenuation and interference, resulting in performance variations between different buildings.

To mitigate these challenges, modern PLC systems employ advanced modulation schemes, filtering techniques, and error-correction mechanisms. Although these technologies significantly improve communication reliability, overall performance remains dependent on the electrical characteristics of the residential installation.

E. Future Residential Applications

As residential environments become increasingly interconnected, PLC is expected to play an important role in supporting future smart-home services. Emerging applications such as distributed energy management, residential battery storage systems, electric vehicle charging coordination, and advanced home automation require reliable communication between numerous devices distributed throughout a building.

The integration of PLC with Internet of Things (IoT) technologies offers opportunities for centralized monitoring and control without extensive modifications to existing infrastructure. Communication between smart meters, charging

stations, renewable energy systems, and household controllers can be facilitated through the existing electrical network. Such capabilities are particularly relevant as residential energy systems become more intelligent and interconnected.

Although wireless technologies continue to dominate many consumer applications, PLC remains a valuable alternative where reliability, coverage, and installation cost are important considerations. Future developments in smart-grid technologies, energy-management systems, and residential automation may further increase the relevance of PLC within modern homes [6].

Overall, PLC represents a practical and cost-effective communication technology for residential environments. By leveraging existing electrical infrastructure, it provides reliable connectivity, supports smart-home applications, and enables future residential services without requiring extensive new cabling.

III. INDUSTRIAL APPLICATIONS

The same argument that motivated PLC in early utility networks applies equally on the factory floor: the communication medium is already installed. Industrial facilities are densely wired for power delivery, and adding a data channel over this infrastructure avoids the cost and disruption of running dedicated signal cables through walls, cable trays, and machinery enclosures. In established plants where stopping production for days to lay new wiring is not acceptable, this is a substantial practical advantage over both wired fieldbus extensions and wireless systems [8], [9].

The industrial setting does, however, create conditions that are considerably harsher than those of a domestic network. Electric motors, frequency inverters, arc-welding equipment, and other machinery simultaneously act as impedance loads and noise sources. The resulting disturbances—impulsive transients, frequency-dependent attenuation, and time-varying noise across a wide spectral range—make PLC more demanding to implement than in a residential building. The subsections that follow describe the main application areas in which PLC has been studied and deployed in industrial and infrastructure contexts, and the measures required to make communication reliable in these environments.

A. Advanced Metering in Industrial Distribution Networks

A practically important use of PLC in industrial facilities is energy metering across large internal distribution networks. A factory or campus may host hundreds of power consumers, and collecting real-time consumption data from each of them enables load monitoring, cost allocation between production areas, and participation in demand response programs. Building a separate wired network for this purpose is expensive; a PLC-based advanced metering infrastructure (AMI) can instead use the low-voltage distribution cables already in place.

De Carvalho et al. [10] examined such a system by simulating a narrowband PLC network on a representative distribution feeder with a central substation controller. PLC was selected because it could meet both coverage and cost constraints while reusing existing electrical infrastructure.

Network Simulator 3 results showed that all measurement packets reached the substation within the 2-second latency requirement for AMI, with full packet delivery over a 24-hour simulation. The required data volume was small compared with channel capacity, leaving headroom for future growth. Overall, the study supports PLC as a practical fit for low-rate industrial metering.

B. Motor Feedback over Feeder Cables

A more demanding application involves using the cable that carries power to an electric motor also as the return path for control and diagnostic data. In drive systems, real-time information such as rotor speed, winding temperature, or vibration level is measured at the motor and must be sent back to the inverter for closed-loop control. Conventionally this requires a separate signalling cable alongside the power feeder, which can span hundreds of metres and adds significant installation and maintenance effort in production environments [11].

Using the feeder cable itself as the communication medium eliminates the need for this additional wiring. A PLC modem at the motor modulates a data signal onto the cable; a second modem at the inverter demodulates it (see Fig. 3). The difficulty, studied experimentally by Ginot et al. [11], is that the feeder does not carry a sinusoidal voltage in this case: it carries the pulse-width-modulated (PWM) output of the inverter, with switching transients whose amplitude is proportional to the DC bus voltage.

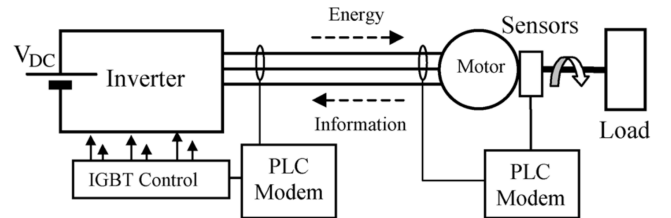


Fig. 3. PLC-based motor feedback loop after [11]. The communication signal shares the feeder cable with the PWM power waveform.

Tests demonstrated that throughput degraded sharply as the DC bus voltage increased, and communication failed entirely above 100 V without additional measures. The root cause was switching noise from the inverter falling into the communication band. Inserting an LCL passive filter at the inverter output reduced these transients and restored reliable communication up to practical drive voltages. The principal engineering lesson is that cable attenuation is usually manageable; inverter noise is the dominant limiting factor.

C. Railway Signalling and Infrastructure Control

Metro railway systems present a different use case in which PLC, combined with supervisory control, offers advantages over conventional communication-based train control. Train operation requires real-time exchange of position, speed, and safety data between trains, stations, and a central operations centre. Radio-based communication systems used for this

purpose are effective under normal conditions, but their performance can deteriorate under congestion or if the wireless link is disrupted, and they typically depend on a continuous upstream connection for full functionality.

Tomar et al. [12] proposed a metro-rail control architecture that combines Power Line Communication links over the traction power infrastructure with a central SCADA layer for monitoring and operator supervision. In their design, station-side controllers perform local train tracking and safety functions, while status information is forwarded to the Operational Control Centre. A key reliability requirement was that core tracking and emergency functions remain available even when the traction supply is interrupted—a condition in which radio-dependent systems may lose their communication path. The study reports that this local control capability, together with PLC-based backhaul and central supervision, helped preserve service continuity under fault conditions.

Compared with the conventional Communication-Based Train Control architecture, the proposed arrangement improved position-reporting consistency and reduced false alarms, with faster recovery after interruptions and clearer central operator supervision.

D. Channel Conditions and Protocol Selection in Practice

The performance achievable in any given installation depends heavily on the electrical environment at that site, and choosing the right frequency band is often more important than the choice of coding or modulation scheme. Rinaldi et al. [9] built a multi-protocol PLC analyser around a software-defined radio architecture and deployed it in a real truck manufacturing plant to characterise the low-voltage channel. Their measurements showed that error rates worsened strongly over longer cable runs, and that the lower-frequency region was most affected by machinery noise. In this setting, operation below 100 kHz was not recommended.

Pereira et al. [8] tested G3-PLC modems across multiple frequency bands and subcarrier modulations in a laboratory fitted with six three-phase induction motors and a frequency inverter. The inverter was the dominant disturbance source: performance in lower-frequency CENELEC-A conditions degraded strongly, while higher-frequency FCC-band operation was markedly more reliable.

ROBO (Robust Operation) mode, defined within the G3-PLC standard, addresses the noise problem by adding strong redundancy, trading throughput for robustness under heavy noise. For low-rate tasks such as metering and status reporting, robust modes in higher bands are often the most practical option. Where only lower bands are available, on-site channel characterisation remains essential because noise conditions are highly plant-specific.

The general picture that emerges from these studies is that PLC in industry is not a plug-and-play technology. Careful frequency selection, appropriate modulation robustness, and—where motor drives are involved—output filtering are prerequisites. Within those constraints, PLC provides a communication path over infrastructure that already exists, at a cost that dedicated cabling or wireless repeater networks cannot match.

IV. INDUSTRIAL STANDARDS

V. CONCLUSION

REFERENCES

- [1] A. Pandit. (2019, Sep.) What is power line communication (plc) and how it works. CircuitDigest. [Online]. Available: <https://circuitdigest.com/article/what-is-power-line-communication-plc-and-how-does-it-work>
- [2] G. A. Campbell, “Physical theory of the electric wave-filter,” *Bell System Technical Journal*, vol. 1, no. 2, pp. 1–32, Nov. 1922.
- [3] W. V. Wolfe, “Carrier telephony on high voltage power lines,” *The Bell System Technical Journal*, vol. 4, no. 1, pp. 152–177, Jan. 1925. [Online]. Available: <https://archive.org/details/bstj4-1-152>
- [4] CENELEC, “EN 50065-1: Signalling on low-voltage electrical installations in the frequency range 3 kHz to 148.5 kHz – Part 1: General requirements, frequency bands and electromagnetic disturbances,” 2011, european Standard.
- [5] H. Ferreira, H. M. Grove, O. Hooijen, and J. Vinck, “Power line communications: an overview,” in *Proceedings of IEEE AFRCON '96*, vol. 2, Oct. 1996, pp. 558–563.
- [6] S. Galli, A. Scaglione, and Z. Wang, “For the grid and through the grid: The role of power line communications in the smart grid,” *Proceedings of the IEEE*, vol. 99, no. 6, pp. 998–1027, Jun. 2011.
- [7] M. Zimmermann and K. Dostert, “A multipath model for the powerline channel,” *IEEE Transactions on Communications*, vol. 50, no. 4, pp. 553–559, Apr. 2002.
- [8] S. C. Pereira, A. S. Caporali, and I. R. Casella, “Power line communication technology in industrial networks,” *2015 IEEE International Symposium on Power Line Communications and Its Applications, ISPLC 2015*, pp. 216–221, 7 2015. [Online]. Available: https://www.researchgate.net/publication/281209054_Power_Line_Communication_Technology_in_Industrial_Networks
- [9] S. Rinaldi, P. Ferrari, A. Flammini, M. Rizzi, E. Sisinni, and A. Vezzoli, “Performance analysis of power line communication in industrial power distribution network,” *Computer Standards and Interfaces*, vol. 42, pp. 9–16, 11 2015.
- [10] R. S. de Carvalho, P. K. Sen, Y. N. Velaga, L. F. Ramos, and L. N. Canha, “Communication system design for an advanced metering infrastructure,” *Sensors*, vol. 18, 11 2018.
- [11] N. Ginot, M. A. Mannah, C. Batard, and M. MacHmoum, “Application of power line communication for data transmission over pwm network,” *IEEE Transactions on Smart Grid*, vol. 1, pp. 178–185, 9 2010.
- [12] I. Tomar, I. Sreedevi, and N. Pandey, “Plc and scada based real time monitoring and train control system for the metro railways infrastructure,” *Wireless Personal Communications*, vol. 129, pp. 521–548, 3 2023. [Online]. Available: <https://dl.acm.org/doi/10.1007/s11277-022-10109-1>