
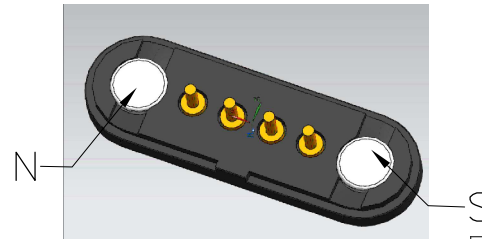
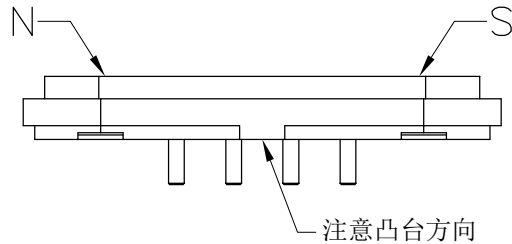
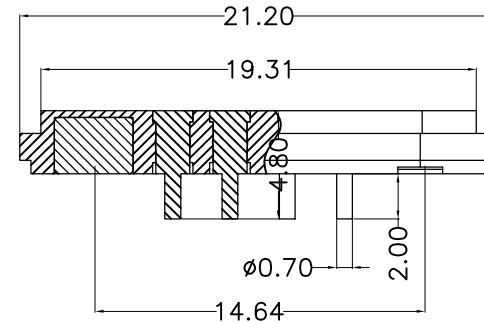



USED ON -

- otes:
Characteristics:
A. Material (材料)
1) Housing: High Plastic BLACK (UL94V-0)
2) Plunger: brass c3604
B. Plating (电镀)
1) Plunger: Brass, Plating 3u' Au over Min. 50u' Ni.
C. Electrical (电特性)
1) Operating voltage: 12V Max.
2) Operating current: 1A Max.
3) Contact resistance: 30mohm Max.
at working height (Quiescence).
D. Environmental (工作条件)
1) Storage and operating temperature range:
-40°C ~ +85°C
2) Humidity range: 10% RH to 90% RH
3) Salt spray: 48H
E. Others (其他)
1) The dimensions marked * are critical,
Should be checked in production
2) RoHS compliant product.

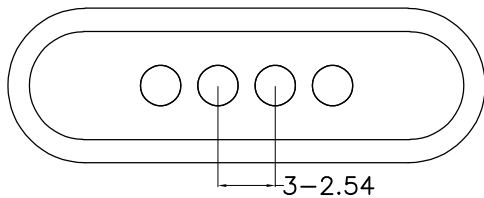

⑫			DIMENSIONS: MM	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN DENGYINGSHUAI	MATERIAL -	HEAT TREAT -	REQ'D -
⑪				0 PLC ± - 1 PLC ± 0.2 2 PLC ± 0.1 3 PLC ± 0.05 4 PLC ± 0.02	CHK MOTIECHEN	深圳市元升电子有限公司		
⑩	New Release	2023-08-15			APVD			
			ANGLES ±0.3° SURFACE TEXTURE		NAME 名称 4P-2.54PH	SPEC 规格 PG1.8-2.8-4P-2.54PH-2.8H		
REVISION	REVISION RECORD	DATE			SCALE 比例 1:1	SIZE 尺寸 A4	DRAWING NO 图号 A0481-SPIN0772-0414100254	

8

7

6

5

4

3

2

1