





I2C Address
0x36








These sense traces must be routed as a differential pair and kept as short as physically possible.
Any noise here will ruin the capacity calculations.

This creates a voltage divider that sets the hardware over-charge protection to exactly 4.2V for lithium polymer battery.




These isolate the noisy RF components and allow the MCU to completely shut them down to save power.

Schematic	cyrus			Create at	2026-04-17
				Update at	2026-04-23
Board	Board2			Page	CN3791
Drawn		cyrus v1			
Reviewed					
		Version	Size	Page 1 Total 5	
		V1.0	A3	EasyEDA.com	

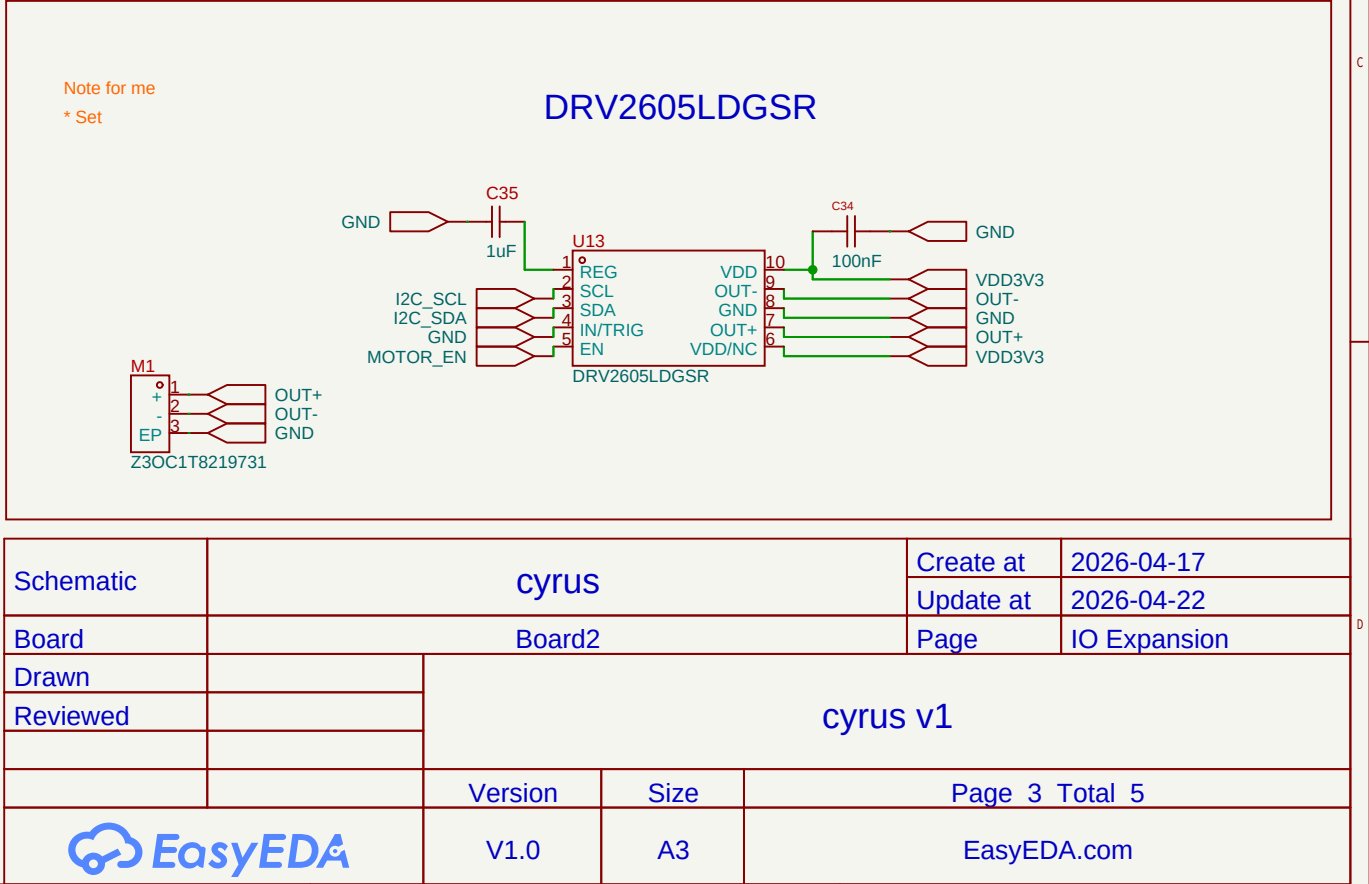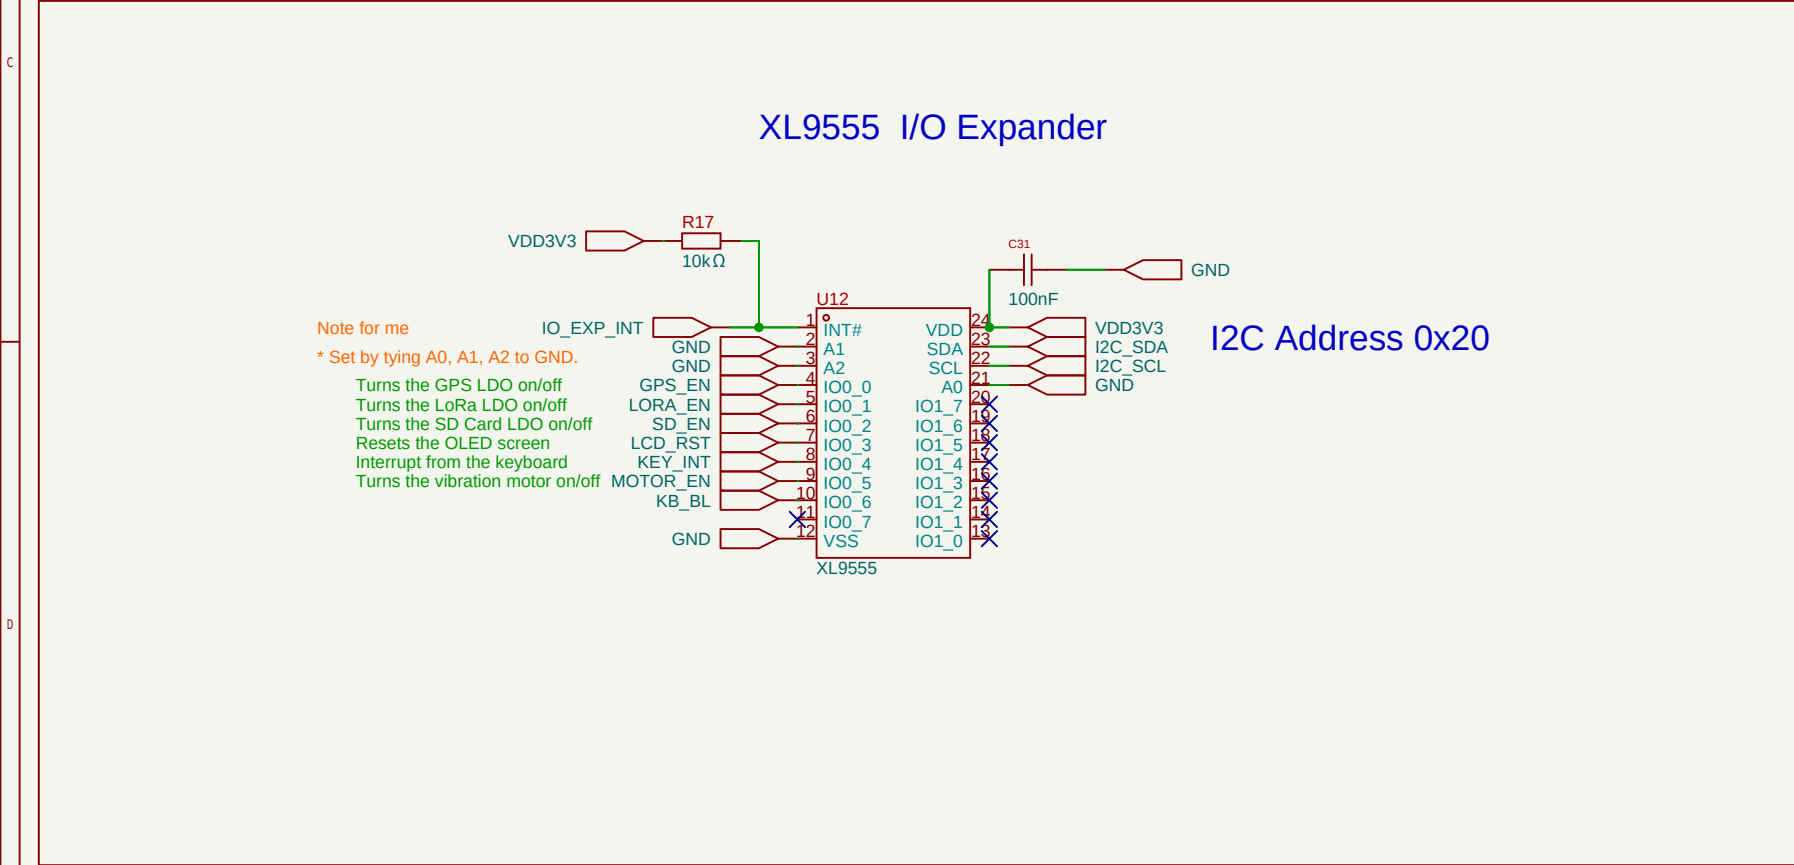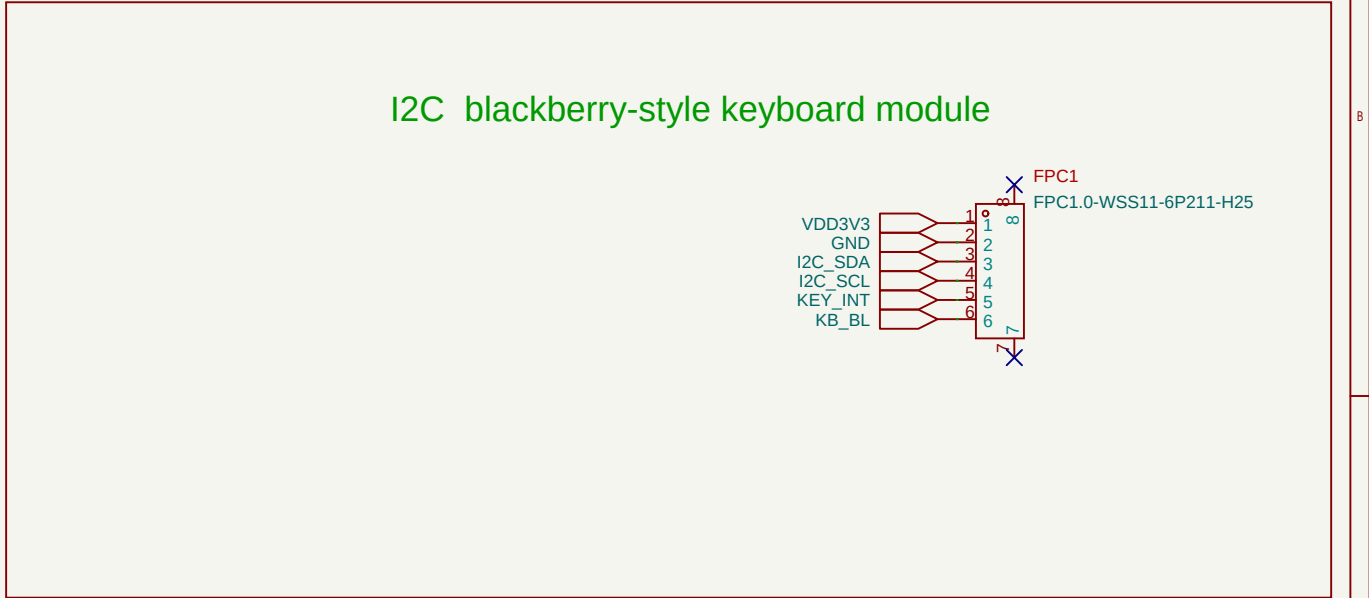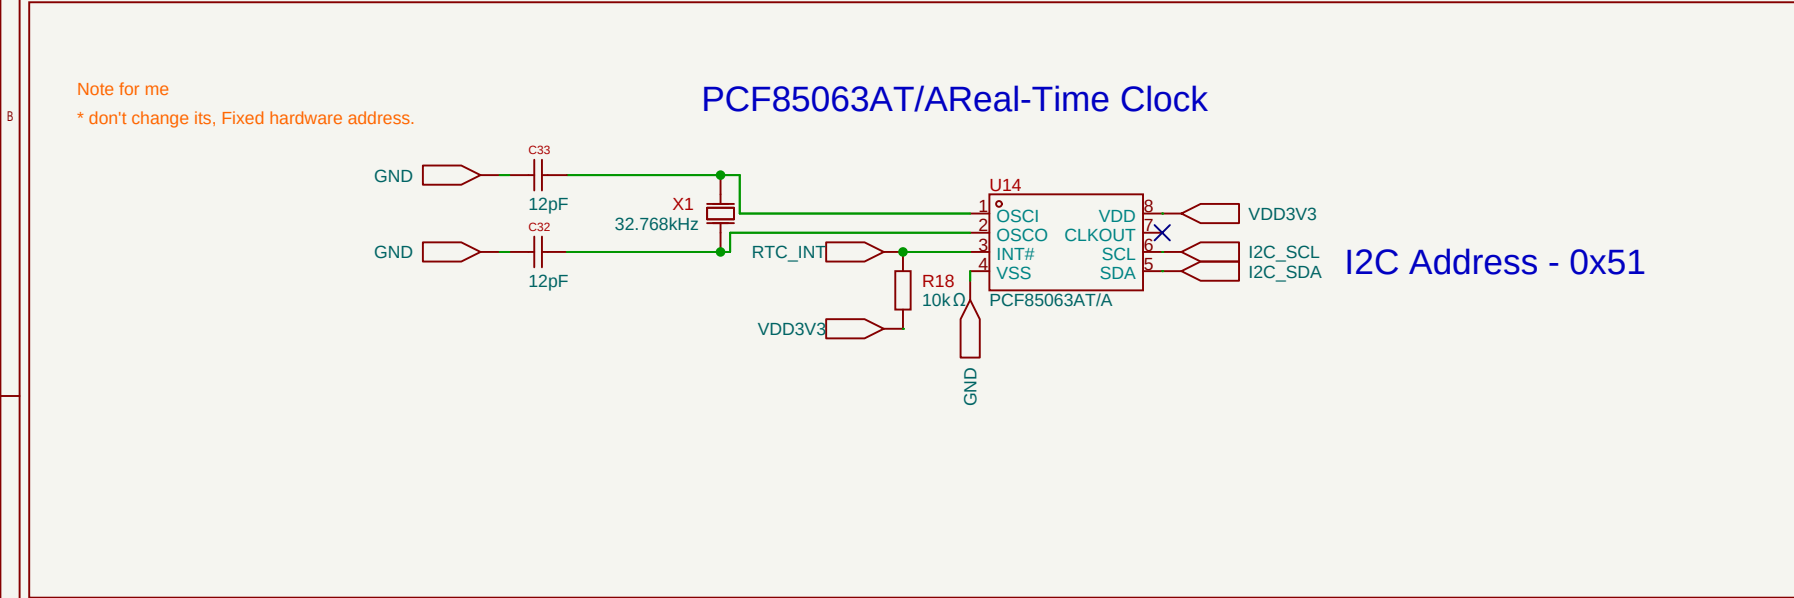



BME280 Environment Sensor

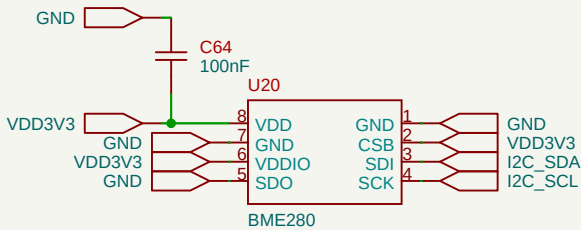


I2C Address
0x76

Set by tying SDO to GND.

The Amplifier (MAX98357A)

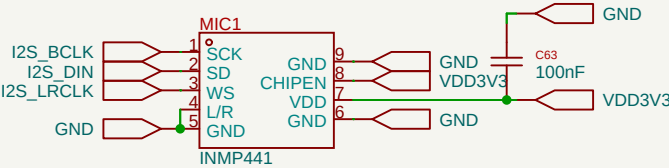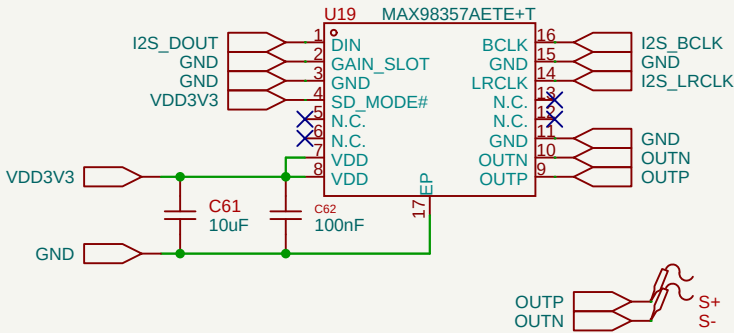

OLED Display (HS13L03W2C01 / 30-Pin FPC)

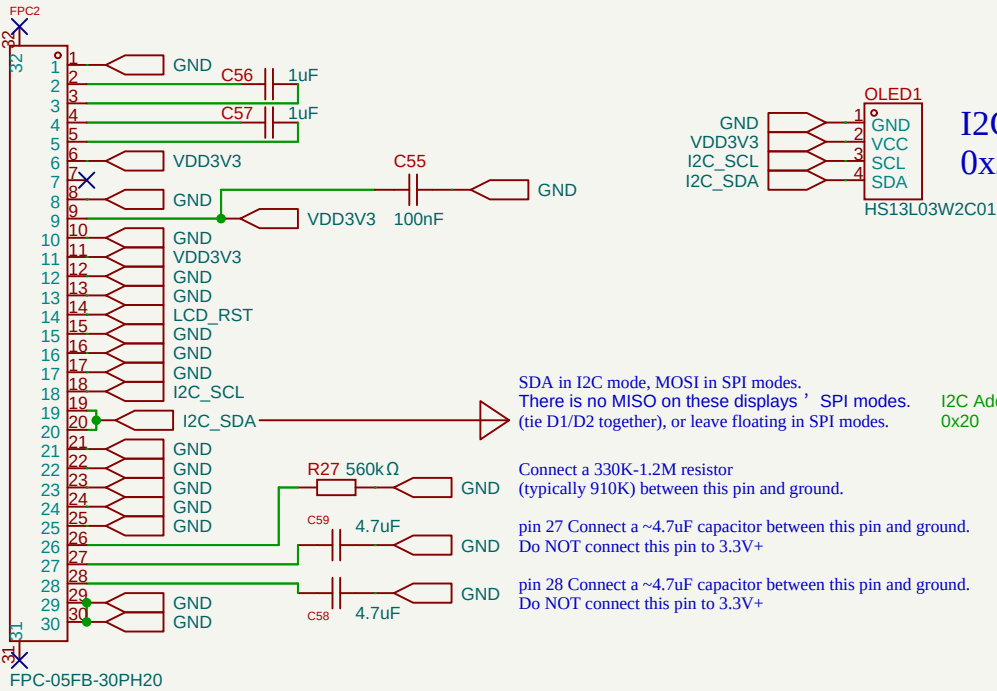

I2C Address
0x20


SDA in I2C mode, MOSI in SPI modes.
There is no MISO on these displays ' SPI modes.
(tie D1/D2 together), or leave floating in SPI modes.

Connect a 330K-1.2M resistor
(typically 910K) between this pin and ground.

pin 27 Connect a ~4.7uF capacitor between this pin and ground.
Do NOT connect this pin to 3.3V+

pin 28 Connect a ~4.7uF capacitor between this pin and ground.
Do NOT connect this pin to 3.3V+

The MicroSD Card Socket

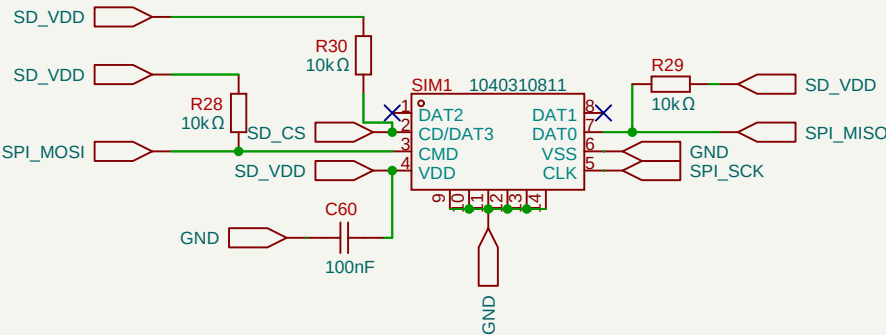

Schematic	cyrus	Create at	2026-04-18	
		Update at	2026-04-22	
Board	Board2		Page	Audio and UI
Drawn	cyrus v1			
Reviewed				
		Version	Size	Page 5 Total 5
EasyEDA		V1.0	A3	EasyEDA.com