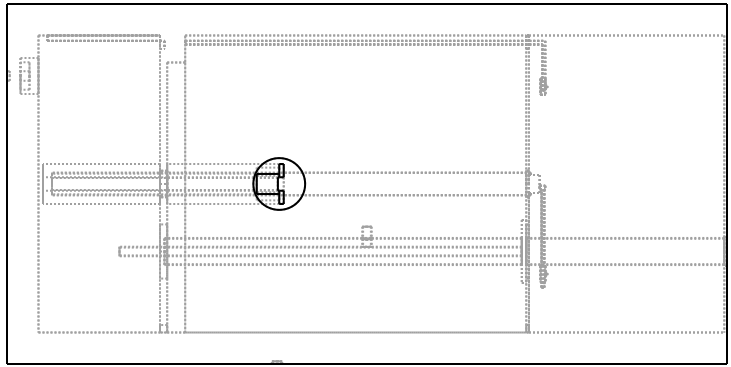

Graph revision AD - ga_side: Keys: 800 overall depth (-Y face); casing t6 + fibre lining t24 + graphite ram t40; wetted cavity 660 square
Graph revision AD - ga_side: 1600 overall height; riser DN50 OD 60.3 t 2.0 at (+150,+150) from the shell centre, top 1594
Graph revision AD - ga_side: Return dip leg DN15 inside the riser annulus, bottom z 250; N3 Cl2 stub +Y z 600 - dr
Graph revision AD - ga_side: N2 lance z 160 sub-surface; general tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-CR_CELL-GA_SIDE
CR_CELL fabrication drawing GA_SIDE (AQS-PLAN-006 M3; graph
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev fc8c03ad Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001