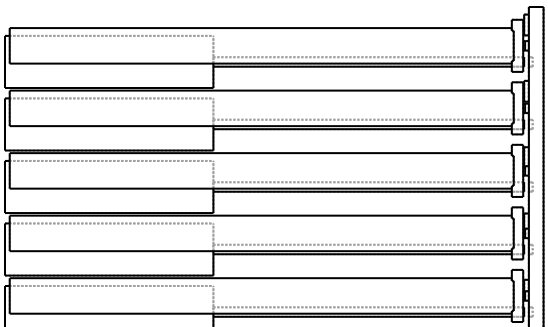

Graph revision AC - el01: 5 anodes D75 x 1064 at x 170..698 step 132 (y 400); immersion 400 mm, tips z 100; clamp bars 110 x 40 x 24 (10 x M12 studs, fast
Graph revision AC - el01: 5 cathode plates 110 x 12 x 440 at x 136..664 step 132 on the -Y ram face, z 90..530 (duty section 2 graph design row)
Graph revision AC - el01: Cu rails 2 x 32 x 31 (975 mm2 class) on ceramic pads, z 1196..1227; straps 8 x 20 Cu, 3
Graph revision AC - el01: Bus hardware frame-isolated per AQS-STD-002 section 11; general tolerance ISO 2768-m

Aqueous Solutions (owner) AQS-MFG-AL_POT-EL01
AL_POT fabrication drawing EL01 (AQS-PLAN-006 M3; graph revi
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev c0aea060 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001