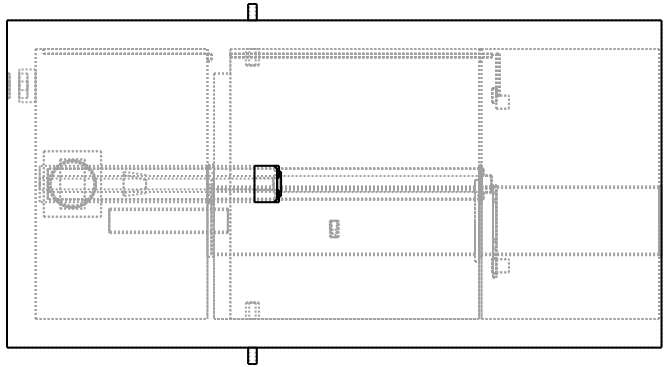

Graph revision AC - ga_side: Keys: 800 overall depth (-Y face); casing t6 + fibre lining t24 + graphite ram t40; wetted cavity 660 square
Graph revision AC - ga_side: 1600 overall height; riser DN150 OD 168.3 t 4.0 at (+90,+90) from hood centre, top 1594
Graph revision AC - ga_side: Dip leg DN50 OD 60.3 Hastelloy C-276 inside the riser annulus, bottom z 250 (250 mm
Graph revision AC - ga_side: N2/N4 stub faces z 600 above the hood plate - dry 700 C headspace (M7); N3 lance z
Graph revision AC - ga_side: General tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-AL_POT-GA_SIDE
AL_POT fabrication drawing GA_SIDE (AQS-PLAN-006 M3; graph r
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev efedeaf1 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001