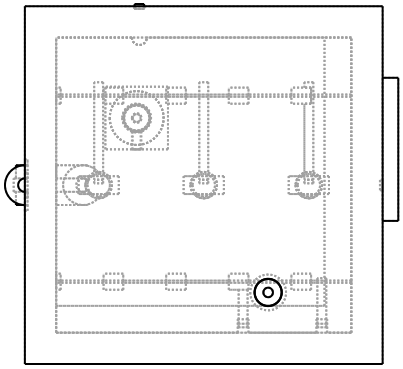


Graph revision AC - nozzle_orient: N1 +X face z 600: Ca-metal tap well, crest and discharge lip (open launder, solids - bore not calculated)
Graph revision AC - nozzle_orient: N2 -X face, y 400, z 160: DN15 Class 150, CaCl2 brine concentrate inlet, lance into the bath
Graph revision AC - nozzle_orient: N3 +Y face, x 598, z 600: DN15 Class 150, chlorine byproduct export (water-trea
Graph revision AC - nozzle_orient: N4 bottom face, (256,160): DN15 drain well, sump face z 50, flush at z 0
Graph revision AC - nozzle_orient: N5 top, DN15 on the DN50 riser at z 800
Graph revision AC - nozzle_orient: Heights/bore/rating per docs-authority/nozzles/CA_POT.csv; compass faces are t

Aqueous Solutions (owner) AQS-MFG-CR_CELL-NOZZLE_ORIENT
CR_CELL fabrication drawing NOZZLE_ORIENT (AQS-PLAN-006 M3;
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 1a48d908 Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001