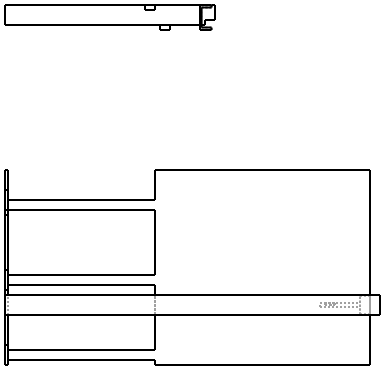

Graph revision AC - gd01: Rear hot-zone guard: panel frame 780 x 860 on floor posts (40 x 12) and a floor channel, anchored to the frame feet; mesh opening
Graph revision AC - gd01: Static shear / stop block: pedestal to the floor (80 x 160), block head z 600..800, tool-steel knife insert at the -X face, strike bar top;
Graph revision AC - gd01: Sprue/runner shear campaign is a task 12 traveller item; no rate is claimed (params.jso
Graph revision AC - gd01: Discharge lane guides x2 at the +X face (20 x 100 x 40 each) pick the N3/N4 mouth edg
Graph revision AC - gd01: Mould-change gantry: 2 columns SHS 80 x 80 (x 260..340) to z 1500, top beam, trolley b
Graph revision AC - gd01: Fixed cover over the knife zone (t6 plate + side ribs); general tolerance ISO 2768-m unle

Aqueous Solutions (owner) AQS-MFG-CAST_LINE-GD01
CAST_LINE fabrication drawing GD01 (AQS-PLAN-006 M3; graph R
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 41b768e0 Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001