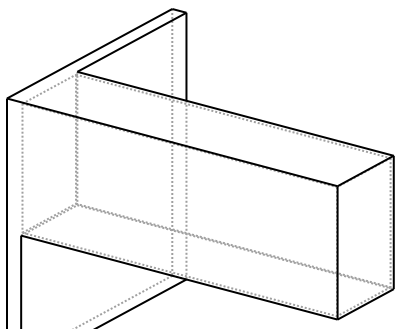

Graph revision AD - aux01: Controls cabinet 0.05 kW connected (node design) - purchased per plan rule 6, drawn as its envelope; standby unit, energized only
Graph revision AD - aux01: Plinth with 8 x M12 wedge anchors (fasteners.csv item 1); 12 x M10 8.8 studs on the roof hatch and burner-block clamp (item 2)
Graph revision AD - aux01: Connection hardware DN15 open-bore tube (lib/dn Sch 40 table), flush at the envelope

Aqueous Solutions (owner) AQS-MFG-COMB_HEAT-AUX01
COMB_HEAT fabrication drawing AUX01 (AQS-PLAN-006 M3; graph
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev cbcc5785 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001