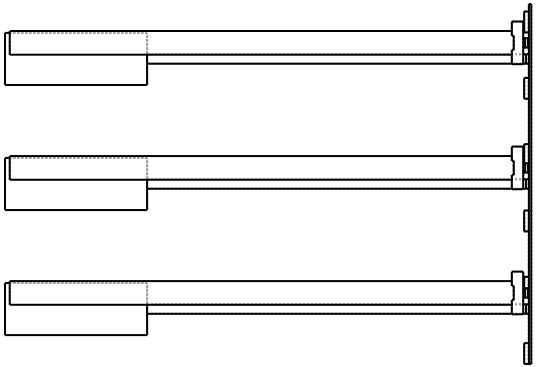

Graph revision AD - el01: 3 anodes D50 x 1064 at x 170, 434, 698 (y 400); immersion 250 mm, tips z 100; clamp bars 90 x 40 x 24 (6 x M10 studs, fasteners.
Graph revision AD - el01: 3 cathode plates 110 x 12 x 300 on the -Y ram face, z 90..390 (duty section 2 graph design row cathodes 3)
Graph revision AD - el01: Cu rails 2 x 5 x 5 (25 mm2 class) on ceramic pads, z 1196..1201; straps 6 x 20 Cu, 3 mm
Graph revision AD - el01: Bus hardware frame-isolated per AQS-STD-002 section 11; general tolerance ISO 2768-m

Aqueous Solutions (owner) AQS-MFG-CR_CELL-EL01
CR_CELL fabrication drawing EL01 (AQS-PLAN-006 M3; graph Rev
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 50dcbf88 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001