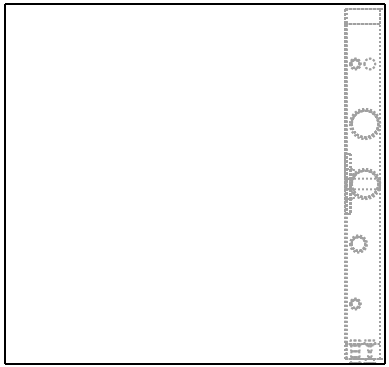


Graph revision AD - ga_side: Keys: 720 mm inside-width stack: plate 600 + 2 x 50 rack margin; wall 10 mm PVC-U
Graph revision AD - ga_side: Plates z 160..580 immersed; Ti tabs 120 wide rise to z 691; bus bars at z 691 and above
Graph revision AD - ga_side: Support beams under the pads at z 673..683, bolted to the inner walls
Graph revision AD - ga_side: Nozzle hardware drawn flush at the envelope faces (lib/nozzles.place_on_face); hose r
Graph revision AD - ga_side: General tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-EW_9-GA_SIDE
EW_9 fabrication drawing GA_SIDE (AQS-PLAN-006 M3; graph Rev
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 1f755ed0 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001