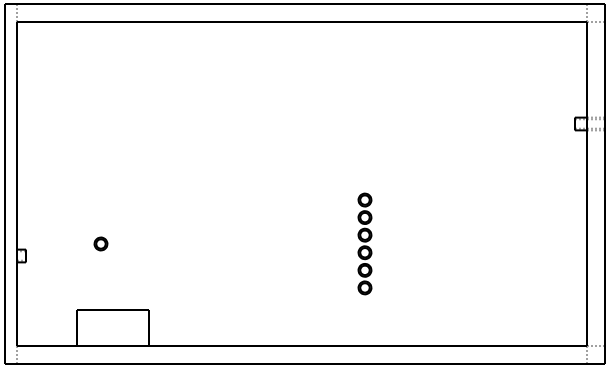

Graph revision AD - aux01: PVC-U inlet knock-out pot OD 60 x 120 (duty section 3: inlet knock-out PVC-U, wet)
Graph revision AD - aux01: Guard frame per A-MACH: four 30 x 30 posts with top rail + plinth 600 x 400 x 20 (AQS-MOD-002 dry service); 8 slab anchors
Graph revision AD - aux01: Connection hardware DN15 as open-bore tube stubs flush at the envelope faces; all 9 s

Aqueous Solutions (owner) AQS-MFG-H2_DRYER-AUX01
H2_DRYER fabrication drawing AUX01 (AQS-PLAN-006 M3; graph R
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 373c9c73 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001