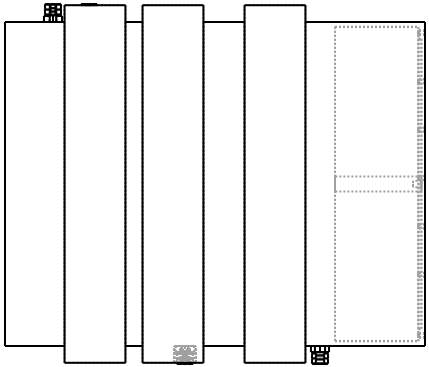

Graph revision AC - ga_side: HX-5 coil envelope OD 925 / ID 575 x 600 on four PTFE pads at z 16..716 (mass from the tube, not the envelope)
Graph revision AC - ga_side: Agitator: PBT D450 at z 250, PVDF-sheathed D 50 shaft through the lid; drive bridge outside the envelope, not modeled
Graph revision AC - ga_side: Port extension stubs reach 10 mm into the cavity so every union crosses the wall
Graph revision AC - ga_side: Nozzle hardware drawn flush at the envelope faces (lib/nozzles.place_on_face)
Graph revision AC - ga_side: General tolerance ISO 2768-m unless noted

Aqueous Solutions (owner) AQS-MFG-LEACH_CSTR_1-GA_SIDE
LEACH_CSTR_1 fabrication drawing GA_SIDE (AQS-PLAN-006 M3; g
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 72c47135 Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001