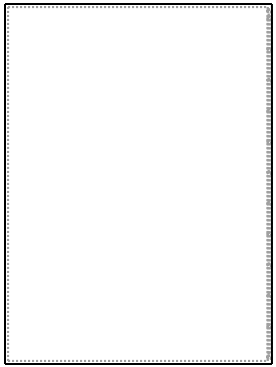

Graph revision AC - sh01: CPVC tank, body 1888 x 1080 x 1400, wall 16 mm, floor 16 mm, lid 12 mm on a 40 mm flange (AQS-DUTY-050 wall 16 / floor 16; lid
Graph revision AC - sh01: Panel stress 1.37 MPa at the floor against 3.03 MPa CPVC allowable at 85 C (AQS-DUTY-050)
Graph revision AC - sh01: Thermoplastic welds per the unit WORK_ORDER route (hot-gas / extrusion, CPVC); hydro
Graph revision AC - sh01: Corrosion allowance 0 mm (AQS-STD-001 polymer rule); general tolerance ISO 2768-m

Aqueous Solutions (owner) AQS-MFG-LEACH_CSTR_1-SH01
LEACH_CSTR_1 fabrication drawing SH01 (AQS-PLAN-006 M3; grap
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 3848356c Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001