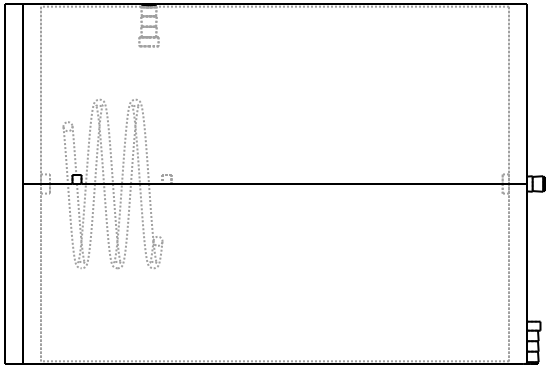

Graph revision AD - ga_side: Coil: 316L tube OD 10, ~2.6 turns at a 120 mm mean diameter, 1.000 m developed, z 80..185 (node design: 1 x 10 mm x 1 m co
Graph revision AD - ga_side: N2 outlet datum 600 clamped to 584.4 by the barb-radius rule; N4 vent flush at the top head (the 800 datum predates the box) -
Graph revision AD - ga_side: Condensing 0.7079 kW at U 1.2 kW/m2K, LMTD 19.6 K (node design block)

Aqueous Solutions (owner) AQS-MFG-MEOH_COND-GA_SIDE
MEOH_COND fabrication drawing GA_SIDE (AQS-PLAN-006 M3; grap
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev 5909e780 Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001