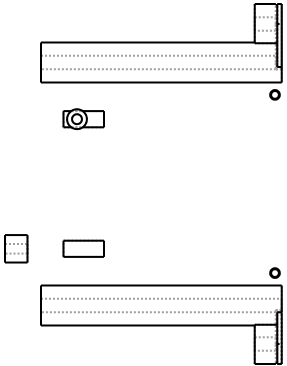

Graph revision AD - aux01: N1/N5 tap groups: carbon wells DN80 OD 88.9, crests 605..615, discharge lips +X/-X z 600 (WO step 6 tap procedures)
Graph revision AD - aux01: N3/N4 inlets -Y z 160: DN15 return stub and the brine chute with DN44 lance into the bath
Graph revision AD - aux01: N7 drain: carbon sump OD 60, DN15 bore through the base stack, flush at z 0 (frozen-s
Graph revision AD - aux01: N2/N6 Cl2 stubs +Y z 600 per the A-M-280 ruling; general tolerance ISO 2768-m

Aqueous Solutions (owner) AQS-MFG-MG_POT-AUX01
MG_POT fabrication drawing AUX01 (AQS-PLAN-006 M3; graph Rev
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev ded0c7dc Issued
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001