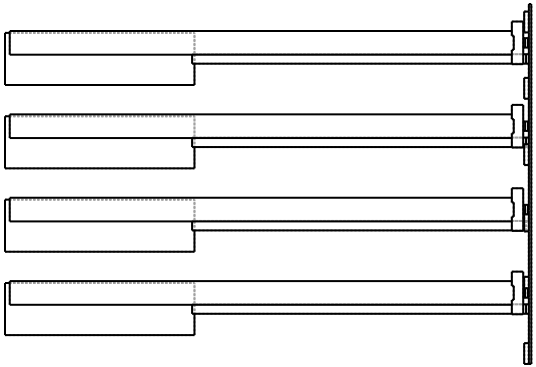

Graph revision AD - el01: 4 anodes D50 x 1064 at x 170, 346, 522, 698 (y 400); immersion 300 mm, tips z 100; clamp bars 90 x 40 x 24 (8 x M10 studs, faster
Graph revision AD - el01: 4 cathode plates 110 x 12 x 400 on the -Y ram face, z 90..490 (duty section 2 graph design row cathodes 4)
Graph revision AD - el01: Cu rails 2 x 10 x 5 (50 mm2 class) on ceramic pads, z 1196..1201; straps 6 x 20 Cu, 3 mm
Graph revision AD - el01: Bus hardware frame-isolated per AQS-STD-002 section 11; general tolerance ISO 2768-m

Aqueous Solutions (owner) AQS-MFG-MG_POT-EL01
MG_POT fabrication drawing EL01 (AQS-PLAN-006 M3; graph Rev
Type: fabrication drawing (GA / nozzle orientation / part sheet) Rev b21ff841 Issued 2
Created: flow graph pipeline Approved: not approved (study)
Sheet 1 of 1 AQS-DWG-001